

KNOXFORD_{TM}

Features

- Brass construction
- For 8" (203 mm) centers
- Brass valve bodies
- Valvet_® valves
- Internal NPT connections
- · ADA compliant lever handles
- Vacuum breaker
- 2-1/4" (57 mm) threaded spout for hose connection
- Pail hook


Codes/Standards Applicable

Specified model meets or exceeds the following:

- ASME A112.18.1/CSA B125.1
- ADA
- ICC/ANSI A117.1



SERVICE SINK FAUCET



Colors/Finishes

- CP: Polished Chrome
- RP: Rough Plate

Specified Model

Model	Description	Colors/Finishes	
K-8905	Service sink faucet less loose key stops	□ CP	□RP
K-8906	Service sink faucet with loose key stops	□ CP	□RP


Product Specification

Two-handle service sink faucet shall be of brass construction. Faucet shall feature brass valve bodies. Faucet shall also feature Valvet valves. Product shall include 2-1/4" (57 mm) threaded spout for hose connection, lever handles, pail hook, internal NPT connections, and vacuum breaker. Faucet shall be with or without loose key stops. Faucet shall be Kohler Model K-

KNOXFORD_{TM}

Installation Notes

Install this product according to the installation guide. Product complies with ASME A112.18.1/CSA B125.1. All dimensions are nominal.

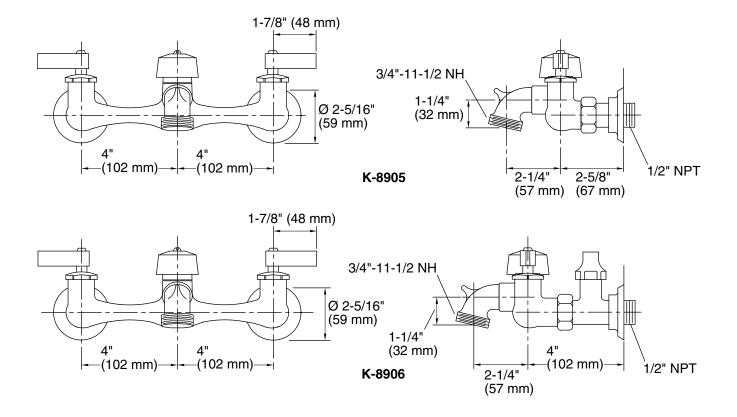

Product Diagram

