


**SERVICE SINK FAUCET
K-8908**

ADA

Features

- Brass construction
- For 8" (203 mm) centers
- Brass valve bodies
- Valvet® valves
- ADA compliant lever handles
- Vacuum breaker
- Loose key stops in shanks
- Wall brace
- Pail hook
- 4-5/8" (117 mm) threaded spout for hose connection
- 8-5/8" (219 mm) wall-to-spout outlet

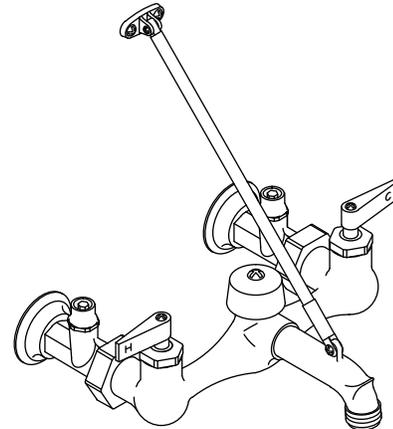

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ICC/ANSI A117.1
- ADA
- ASME A112.18.1/CSA B125.1
- NSF 14

Colors/Finishes

- CP: Polished Chrome
- RP: Rough Plate

Specified Model:

Model	Description	Colors/Finishes	
K-8908	Service sink faucet	<input type="checkbox"/> CP	<input type="checkbox"/> RP

Product Specification


Two-handle service sink faucet shall be of brass construction. Faucet shall feature brass valve bodies. Faucet shall feature Valvet valves. Product shall include 8" (203 mm) centers, 4-5/8" (117 mm) threaded spout for hose connection, 8-5/8" (219 mm) wall-to-spout outlet, lever handles, loose key stops in shanks, vacuum breaker, pail hook, wall brace, and NPT connections. Faucet shall be Kohler Model K-8908-_____.

KINLOCK™

Installation Notes

Install this product according to the installation guide.

Product complies with ASME A112.18.1/CSA B125.1. All dimensions are nominal.

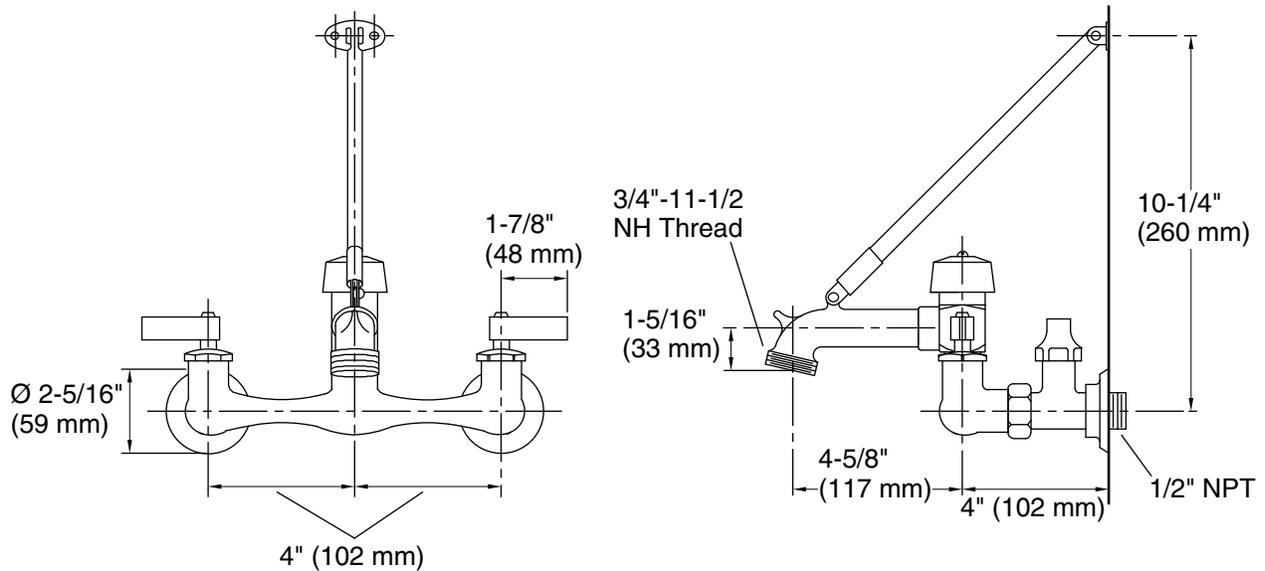

Product Diagram