

PANORAMA SUNSET DOUBLE



Energy efficient Warm White light (3000K) with 74 CRI provides safety/multi-purpose lighting for many security/safety lighting applications.

Performance

- Use double head floods as a direct replacement for conventional flood lights with 50PAR30 halogen lamps for an 84% energy savings (15.9 watts total versus 100)
- Built-in universal voltage drivers accept 100-277V AC input
- Broad horizontal beam angle offers wide coverage

Construction


- UV resistant powder coating for outstanding corrosion protection and exposure to the elements.
- Tempered glass lens with molded gasket and silicone seal
- Swivel arms for precise placement

Installation

- Designed for residential or light commercial use
- Combine neoprene gasket with field application of silicone at each arm attachment to ensure wet location rating (IP65)
- Can be mounted 4 feet or more above ground in areas such as eaves or roof lines lighting parking areas, walkways and surrounding areas
- Canopies have a 1/2" NPS threaded hole with plug for optional pencil photocell (sold separately)



Photometrics

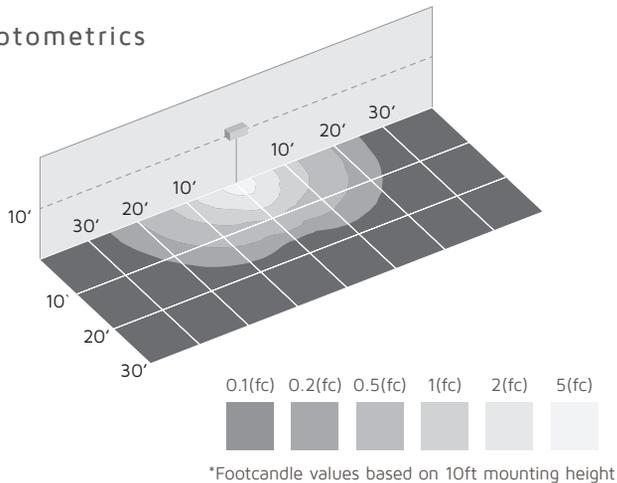

Specifications

Series	ALV2-2H
Input voltage	100-277V AC
Color temperature	3000K
CRI	74+
Wattage	15.9W
Lumens	1144Lm
Beam angle	2 x 95° beam angle 2 x 105° tilt
Housing	Die-cast coated aluminum
Lens	Tempered glass
Rating	c/UL/us Listed for wet locations
Dimensions	4.43"W (base) x 6.50"H
Switching	Branch circuit
Mounting	4" round/octagonal junction box
LED type	COB (Chip on Board) LED
Rated life	50,000 hrs

Panorama Sunset Double & Accessories



ALV2-2H-DB (Dark Bronze)
ALV2-2H-WH (White)
Panorama Sunset Double
3000K / 15.9W / 1144Lm



AL-4C-DB
4" extension arm
(Dark Bronze)



AL-4C-WH
4" extension arm
(White)



PC-120 (120V AC)
PC-277 (208-277V AC)
Dusk to dawn pencil photocell
for 1/2" NPS hole