



Submitted Model No.:\_\_\_\_\_\_\_Specific Features:\_\_\_\_\_



▲ Designate Proper Finish Suffix

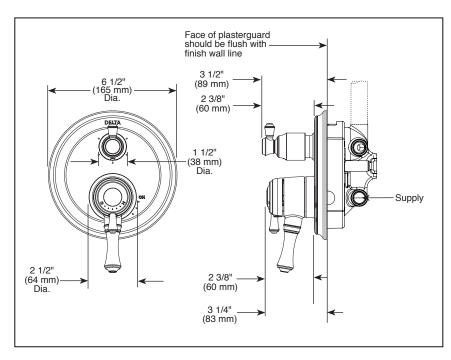



# **INTEGRATED SHOWER**

## **DIVERTER TRIM**

- Traditional Valve Trim with Three Function Diverter (T27897)
- Traditional Valve Trim with Six Function Diverter (T27997)
- Three Lever Handles

### **FEATURES:**

- Monitor<sup>®</sup> 17 Series pressure balanced dual function bath mixing valve trim
- Three or six function diverter

## **STANDARD SPECIFICATIONS:**

- Main control utilizes dual-function pressure balanced cartridge
- Maintains a balanced pressure of hot and cold water even when a valve is turned on or off elsewhere in the system
- For use with MultiChoice<sup>®</sup> Universal rough valve body (R22000 Series)
- Top handle controls diverter functions
- Bottom handles (2) controls on/off and temperature
- Field adjustable to limit handle rotation into hot water zone
- Bottom handle 90° Maximum rotation
- Hot/cold indicator markings
- Three function diverter for 2 individual positions, 1 shared position
- For two individual functions, no shared functions, order additional RP71717
- Six function diverter for 3 individual positions, 3 shared positions
- For three individual functions, no shared functions, order additional RP71718
- Cartridges included
- Standard installation allows up to 11/8" finished wall thickness
- Thick wall installation kit RP90543 can be ordered to allow for up to 2 1/8" finished wall thickness
- Not recommended for tub spout applications

### **WARRANTY**

- Lifetime limited warranty on parts (other than electronic parts and batteries) and finishes: or, for commercial users, for 5 years from date of purchase.
- 5 year limited warranty on electronic parts (other than batteries); or, for commercial users, for 1 year from the date of purchase. No warranty is provided on batteries.

## **COMPLIES WITH:**

ASME A112.18.1 / CSA B125.1
Indicates compliance to
ICC/ANSI A117.1 - Valve control only

