
Location:

SYMMONS® Canterbury®

S4508TRM, S4508TRMTC Shower/Hand Shower Trim **Specification Submittal**




| Feature Highlights | Options/Modifications |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Canterbury Shower/Hand Tub/Shower Trim Requires Temptrol® Pressure Balancing Shower Valve Integral diverter control Metal lever handle Cradle for hand shower wand 60" flexible metal hose 3 mode hand shower Dual checks for backflow protection 1 mode showerhead 2.5 gpm (9.5 L/min) flow restrictors Tub spout not included Components shall be metal and nonmetallic construction, plated in standard Polished Chrome finish Available with TA-10 flow control spindle and T-12A cap assembly for Temptrol valve bodies installed with Test Cap (order p/n S4508TRMTC) | -1.5 CG 1.5 gpm (5.7 L/min) flow restrictor -2.0 2.0 gpm (7.6 L/min) flow restrictor -72 72" hose in place of 60" hose -442HSB 30" slide bar in place of wall cradle -ADACHS ADA hand shower wand (chrome) -ADAHS ADA hand shower wand (white) -H321-V 1 mode hand shower unit with slide bar -H323-V 3 mode hand shower unit with slide bar -H323-V-48 3 mode hand shower unit with 48" slide bar -H3624 24" decorative slide/grab bar with ADA wand -H3636 36" decorative slide/grab bar with ADA wand |
| • For optional in-line vacuum breaker order p/n EF-109 Model Numbers | -L1 Less showerhead -L2 Less showerhead & hand shower wand -L3 Less showerhead & hand shower wand |
| S4508TRM Shower/Hand Shower Trim with integral diverter control, Temptrol Pressure Balancing Tub/Shower Valve ordered separately S4508TRMTC Shower/Hand Shower Trim with integral diverter control, TA-10 flow control spindle and T-12A cap assembly, must order Temptrol valve with Test Cap | -LS Less shower lead & hand shower wand Loop handle -QD Quick-disconnect on hand shower units -R 60" white vinyl hose in place of 60" metal hose -REB Rebuild trim kit, includes TA-10 and TA-4 -T724 24" slide bar/grab bar with ADA wand -T736 36" slide bar/grab bar with ADA wand |
| Compliance | □ -T748 48" slide bar/grab bar with ADA wand |
| ASME A112.18.1/CSA B125.1 | □ -VB Elevated vacuum breaker □ -VP Vandal resistant escutcheon screws in place of standard screws |
| Warranty | □ -STN Satin Nickel finish |
| Limited Lifetime - to the original end purchaser in | Note: Append appropriate -suffix to model number. |

Limited Lifetime - to the original end purchaser in consumer/residential installations.

5 Years - for industrial/commercial installations.

Refer to www.symmons.com/warranty for complete warranty information. Go to www.symmons.com/register to register your Symmons product.

Dimensions

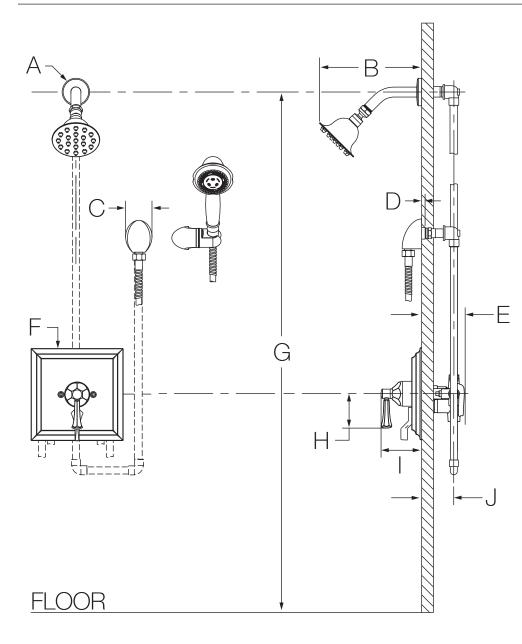

| Measurements | |
|--------------|------------------------------|
| Α | Ø 2-1/4", 57 mm |
| В | 8-5/8", 219 mm |
| С | 2-1/8", 54 mm |
| D | Male 1/2" IPS fitting |
| | must be recessed 1/4" (6 mm) |
| | from finished wall |
| E | 3-1/2", 89 mm |
| F | Sq. 7-1/2", 191 mm |
| G | Ref. 77", 1956 mm |
| Н | 3" 76 mm |
| Ι | 3" 76 mm |
| J | Rough-in |
| | 2-3/8" ± 1/2", 60 mm ± 13 mm |

Notes:

- 1) Valve body and piping not included and shown as reference only.
- 2) Plaster shield (p/n T-176) for dry wall, plaster or other type walls 1/2" or greater.
- 3) All dimensions measured from nominal rough-in (see J as reference).
- 4) Dimensions subject to change without notice.