

---

# BERTAZZONI PROFESSIONAL SERIES

## 48" RANGE TOP CB48 6G 00 X



The Bertazzoni 48" Pro range top, has the same one-piece, seamless, high efficiency worktop design that has become the signature of Bertazzoni freestanding ranges. All burners are in cast brass for enhanced performance, with the dual control brass power burner delivering best-in-class heat-up times and maximum flexibility thanks to its extremely wide BTU range.

### BRASS POWER BURNER



Bertazzoni's exclusive dual control power burner in cast brass delivers high-efficiency performance from a delicate low simmer to full power (750 – 18,000 BTUs) with best-in-class heat-up time.

### GRIDDLE



Sear or cook food directly on the electric stainless steel griddle.



TO COOK BEAUTIFULLY

# BERTAZZONI PROFESSIONAL SERIES

## 48" RANGE TOP CB48 6G 00 X

### FEATURES


<b>Brass burners</b>	6
<b>Dual wok (1x)</b>	750-18000 Btu/h
<b>Rapid (1x)</b>	11000 Btu/h
<b>Semi-rapid (3x)</b>	6200 Btu/h
<b>Auxiliary (1x)</b>	750-3400 Btu/h
<b>Griddle</b>	1100W

### TECHNICAL SPECIFICATIONS

<b>Electrical Requirements</b>	120V 60Hz
<b>Max. Amp Usage</b>	10 Amp
<b>Certification</b>	CSA
<b>Warranty</b>	2 years parts and labor
<b>Product weight</b>	85.6 lbs
<b>Box weight</b>	88.0 lbs

### ACCESSORIES

<b>Simmer ring (standard)</b>	code 408077
<b>Stainless steel griddle (standard)</b>	code SG36X
<b>Wok ring (standard)</b>	code 408084

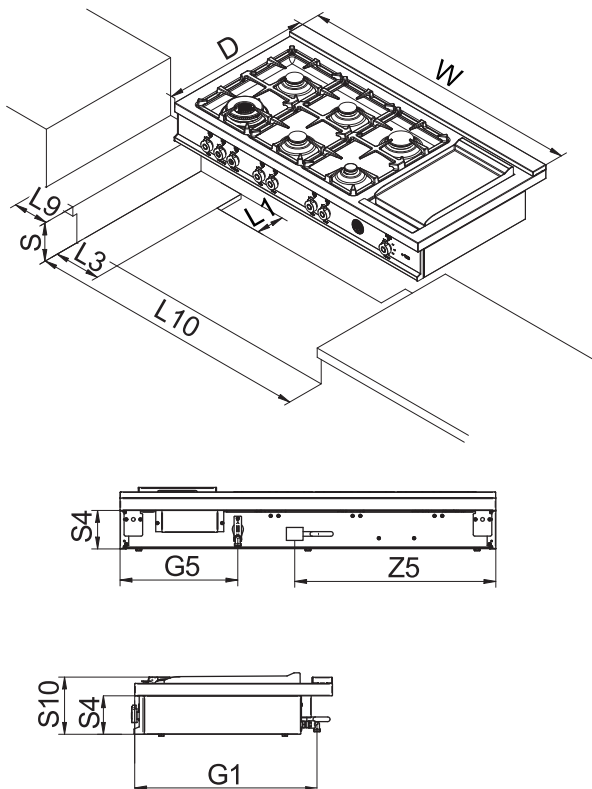

### DIMENSIONS

Ref.	Description	Dimensions	
		Inches	mm
<b>D</b>	Cooktop depth	25 <sup>3</sup> / <sub>16</sub>	640
<b>G1</b>	Distance between gas outlet connection and frontal side	23 <sup>1</sup> / <sub>4</sub>	590
<b>G5</b>	Distance between gas outlet connection and left side	15	381
<b>L1</b>	Cutout depth	4	102
<b>L3 (min)</b>	Cutout clearance from backwall	1	25
<b>L9 (min)</b>	Cutout clearance from cabinetry	6	152
<b>L10</b>	Cutout width	48	1220
<b>S</b>	Cooktop height	6 <sup>1</sup> / <sub>2</sub>	165
<b>S4</b>	Chassis height	4 <sup>15</sup> / <sub>16</sub>	125
<b>W</b>	Cooktop width	47 <sup>13</sup> / <sub>16</sub>	1215
<b>Z5</b>	Adjustable horizontal exit	25 <sup>5</sup> / <sub>8</sub>	651

### INSTALLATION INSTRUCTIONS

Bertazzoni recommends to operate the appliance after it has been installed in a cabinet.

The kitchen cabinets shall be made of materials capable of withstanding temperatures at least 117°F (65°C) above room temperature in order to avoid possible damage to the cabinets during appliance usage.