




## HOT WATER COILS

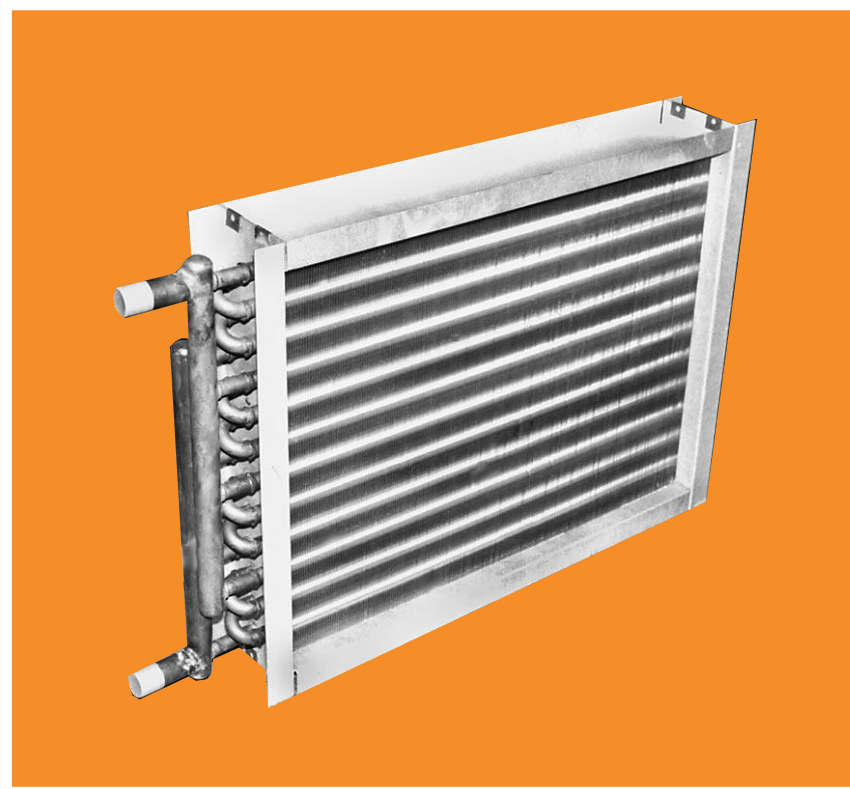



**MAGIC AIRE HOT WATER COILS ARE TESTED TO U.S. AND CANADIAN SAFETY STANDARDS AND ARE ASSEMBLED FOR COMPETITIVE DELIVERY.**

**UNITED ELECTRIC COMPANY, L.P.**

501 Galveston St. • Wichita Falls, Texas 76301 • 940-397-2100 • [customer.service@magicaire.com](mailto:customer.service@magicaire.com)



### MODEL

2130  
3130  
4130

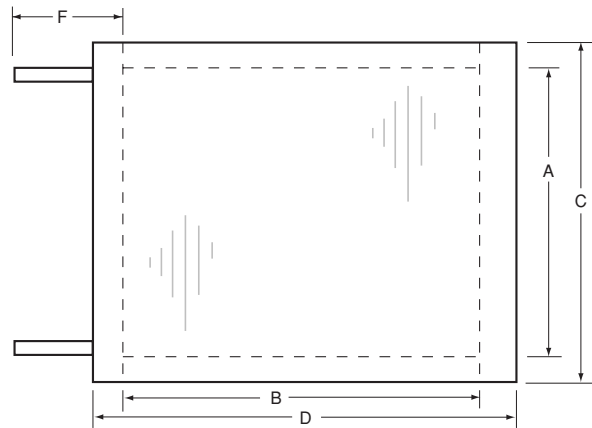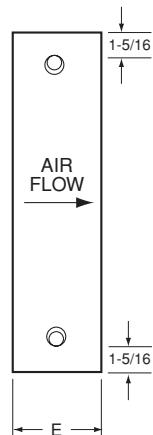



### MODEL

2208  
2347  
2417  
2122410  
2151510  
2153010  
2202010  
2252510  
2253010

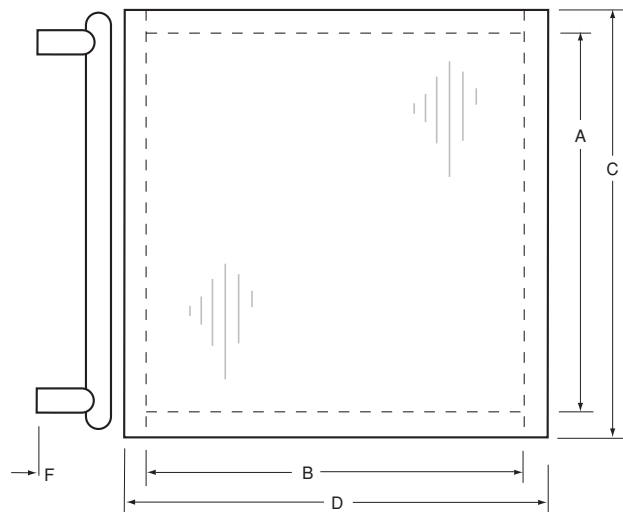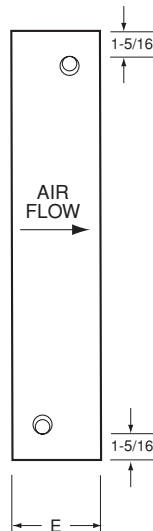

### MODEL

3208  
3347  
3417  
4208  
4347  
4417

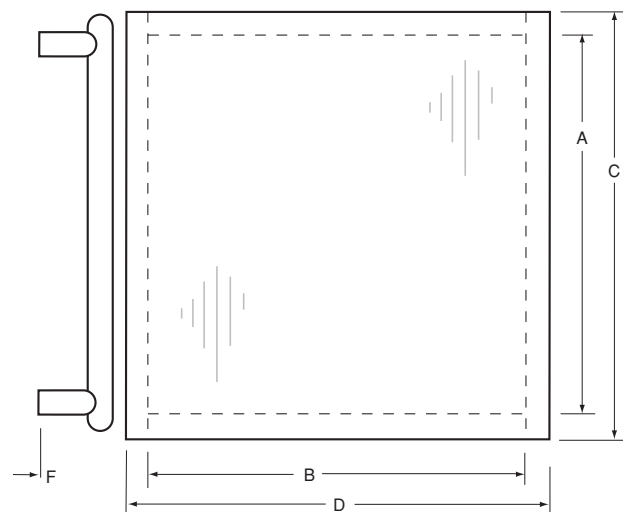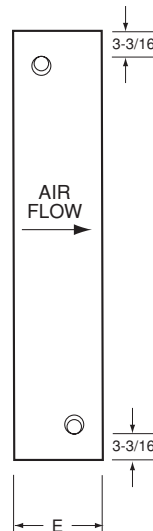



## Space Heating Water Coils

### MODEL SHW

### FEATURES

- Constructed of seamless copper tubing, aluminum fins, and galvanized steel casing.
- Mechanical tube expansion process assures maximum heat transfer.
- Designed for maximum 400 PSIG operating pressure and are UL® listed.
- Designed with top and bottom casing for mounting in new or existing ducts.
- Sweat connections are actual O.D.

### ENGINEERING SPECIFICATIONS

Coils shall be staggered tube type, constructed with 1/2" O.D., .017" wall seamless copper tubes, Type L copper tube headers, and deep corrugated .0045" thick aluminum fins with straight edges. Manufacturer shall supply full depth collars drawn in fin stock to provide accurate control of fin spacing and completely cover the copper tubes to lengthen coil life. Tubes shall be mechanically expanded into the fins for a permanent primary to secondary surface bond, assuring maximum heat transfer efficiency. Coil casing shall be of heavy gauge galvanized steel, with 18 gauge tube sheets and 20 gauge top and bottom casing. Coils shall be tested at 500 PSIG for operation at 400 PSIG.

| MODEL       | ROWS | FACE AREA | A      | B  | C      | D  | E     | F     | COIL<br>CONN.<br>O.D. | SHIP<br>WT. |
|-------------|------|-----------|--------|----|--------|----|-------|-------|-----------------------|-------------|
| SHW-2130    | 2    | 1.30      | 12 1/2 | 15 | 14 1/2 | 17 | 3 3/4 | 3 1/2 | 5/8                   | 11          |
| SHW-2208    | 2    | 2.08      | 15     | 20 | 17     | 22 | 3 3/4 | 4 1/2 | 7/8                   | 15          |
| SHW-2347    | 2    | 3.47      | 20     | 25 | 22     | 27 | 3 3/4 | 5     | 7/8                   | 23          |
| SHW-2417    | 2    | 4.17      | 20     | 30 | 22     | 32 | 3 3/4 | 5 1/4 | 1 1/8                 | 28          |
| SHW-2151510 | 2    | 1.56      | 15     | 15 | 17     | 17 | 3 3/4 | 4 3/8 | 7/8                   | 11          |
| SHW-2122410 | 2    | 2.00      | 12 1/2 | 24 | 14 1/2 | 26 | 3 3/4 | 4 3/8 | 7/8                   | 15          |
| SHW-2202010 | 2    | 2.78      | 20     | 20 | 22     | 22 | 3 3/4 | 4 3/8 | 7/8                   | 20          |
| SHW-2153010 | 2    | 3.13      | 15     | 30 | 17     | 32 | 3 3/4 | 4 3/8 | 7/8                   | 23          |
| SHW-2252510 | 2    | 4.34      | 25     | 25 | 27     | 27 | 3 3/4 | 4 3/8 | 7/8                   | 31          |
| SHW-2253010 | 2    | 5.21      | 25     | 30 | 27     | 32 | 3 3/4 | 4 3/8 | 7/8                   | 37          |
| SHW-3130    | 3    | 1.30      | 12 1/2 | 15 | 14 1/2 | 17 | 3 3/4 | 3 1/2 | 5/8                   | 13          |
| SHW-3208    | 3    | 2.08      | 15     | 20 | 17     | 22 | 3 3/4 | 4 1/2 | 7/8                   | 21          |
| SHW-3347    | 3    | 3.47      | 20     | 25 | 22     | 27 | 3 3/4 | 5     | 7/8                   | 29          |
| SHW-3417    | 3    | 4.17      | 20     | 30 | 22     | 32 | 3 3/4 | 5 1/4 | 1 1/8                 | 35          |
| SHW-4130    | 4    | 1.30      | 12 1/2 | 15 | 14 1/2 | 17 | 4 7/8 | 4     | 5/8                   | 18          |
| SHW-4208    | 4    | 2.08      | 15     | 20 | 17     | 22 | 4 7/8 | 4 1/2 | 7/8                   | 25          |
| SHW-4347    | 4    | 3.47      | 20     | 25 | 22     | 27 | 4 7/8 | 5     | 7/8                   | 38          |
| SHW-4417    | 4    | 4.17      | 20     | 30 | 22     | 32 | 4 7/8 | 5 1/4 | 1 1/8                 | 44          |

## 2 Row Heating

**SHW-2130**

| Ent<br>Wtr | GPM | PD<br>FT. | CFM  | 60 DegF Ent Air |          |          |
|------------|-----|-----------|------|-----------------|----------|----------|
|            |     |           |      | TTL<br>MBH      | LAT<br>F | LWT<br>F |
| 180        | 2.0 | 1.84      | 550  | 26.3            | 103.9    | 153.6    |
|            |     |           | 775  | 29.9            | 95.5     | 149.9    |
|            |     |           | 1000 | 32.7            | 90.1     | 147.1    |
|            | 4.0 | 4.77      | 550  | 28.9            | 108.3    | 165.5    |
|            |     |           | 775  | 33.6            | 99.8     | 163.1    |
|            |     |           | 1000 | 37.2            | 94.2     | 161.3    |
|            | 6.0 | 9.37      | 550  | 30.0            | 110.1    | 170.0    |
|            |     |           | 775  | 35.0            | 101.5    | 168.3    |
|            |     |           | 1000 | 39.2            | 95.9     | 166.9    |

**SHW-2208**

| Ent<br>Wtr | GPM | PD<br>FT. | CFM  | 60 DegF Ent Air |          |          |
|------------|-----|-----------|------|-----------------|----------|----------|
|            |     |           |      | TTL<br>MBH      | LAT<br>F | LWT<br>F |
| 180        | 4.0 | 1.36      | 900  | 46.8            | 107.7    | 156.6    |
|            |     |           | 1150 | 51.7            | 101.2    | 154.1    |
|            |     |           | 1400 | 55.7            | 96.5     | 152.1    |
|            | 8.0 | 3.53      | 900  | 51.1            | 112.1    | 167.2    |
|            |     |           | 1150 | 57.2            | 105.6    | 165.7    |
|            |     |           | 1400 | 62.3            | 100.8    | 164.4    |
|            | 2.0 | 6.92      | 900  | 52.8            | 113.8    | 171.2    |
|            |     |           | 1150 | 59.4            | 107.3    | 170.1    |
|            |     |           | 1400 | 65.0            | 102.5    | 169.2    |

**SHW-2347**

| Ent<br>Wtr | GPM  | PD<br>FT. | CFM  | 60 DegF Ent Air |          |          |
|------------|------|-----------|------|-----------------|----------|----------|
|            |      |           |      | TTL<br>MBH      | LAT<br>F | LWT<br>F |
| 180        | 10.0 | 3.06      | 1500 | 81.8            | 109.9    | 163.6    |
|            |      |           | 2000 | 92.7            | 102.4    | 161.5    |
|            |      |           | 2500 | 101.3           | 97.1     | 159.7    |
|            | 15.0 | 6.01      | 1500 | 85.5            | 112.2    | 168.6    |
|            |      |           | 2000 | 97.5            | 104.6    | 167.0    |
|            |      |           | 2500 | 107.3           | 99.3     | 165.7    |
|            | 20.0 | 10.07     | 1500 | 87.5            | 113.4    | 171.2    |
|            |      |           | 2000 | 100.2           | 105.9    | 170.0    |
|            |      |           | 2500 | 110.6           | 100.5    | 168.9    |

**SHW-2417**

| Ent<br>Wtr | GPM  | PD<br>FT. | CFM  | 60 DegF Ent Air |          |          |
|------------|------|-----------|------|-----------------|----------|----------|
|            |      |           |      | TTL<br>MBH      | LAT<br>F | LWT<br>F |
| 180        | 15.0 | 3.51      | 1800 | 101.8           | 111.7    | 166.4    |
|            |      |           | 2400 | 115.9           | 104.2    | 164.5    |
|            |      |           | 3000 | 127.3           | 98.8     | 163.0    |
|            | 20.0 | 5.64      | 1800 | 104.4           | 113.1    | 169.6    |
|            |      |           | 2400 | 119.4           | 105.5    | 168.1    |
|            |      |           | 3000 | 131.6           | 100.2    | 166.8    |
|            | 25.0 | 8.34      | 1800 | 106.0           | 113.9    | 171.5    |
|            |      |           | 2400 | 121.6           | 106.4    | 170.3    |
|            |      |           | 3000 | 134.4           | 101.0    | 169.2    |

## 2 Row Heating

**SHW-2122410**

| Ent Wtr | GPM | PD FT. | CFM  | 60 DegF Ent Air |       |       |
|---------|-----|--------|------|-----------------|-------|-------|
|         |     |        |      | TTL MBH         | LAT F | LWT F |
| 180     | 4.8 | 3.37   | 900  | 47.4            | 108.2 | 160.2 |
|         |     |        | 1150 | 52.5            | 101.8 | 158.1 |
|         |     |        | 1400 | 56.6            | 97.0  | 156.4 |
|         | 5.5 | 4.17   | 900  | 48.4            | 109.2 | 162.4 |
|         |     |        | 1150 | 53.7            | 102.8 | 160.4 |
|         |     |        | 1400 | 58.1            | 98.0  | 158.8 |
|         | 6.0 | 4.80   | 900  | 48.9            | 109.8 | 163.7 |
|         |     |        | 1150 | 54.4            | 103.3 | 161.8 |
|         |     |        | 1400 | 58.9            | 98.6  | 160.3 |

**SHW-2151510**

| Ent Wtr | GPM | PD FT. | CFM  | 60 DegF Ent Air |       |       |
|---------|-----|--------|------|-----------------|-------|-------|
|         |     |        |      | TTL MBH         | LAT F | LWT F |
| 180     | 3.1 | 0.83   | 550  | 30.3            | 110.6 | 160.4 |
|         |     |        | 775  | 34.7            | 101.2 | 157.5 |
|         |     |        | 1000 | 38.2            | 95.0  | 155.3 |
|         | 3.8 | 0.97   | 550  | 31.3            | 112.4 | 163.4 |
|         |     |        | 775  | 36.2            | 102.9 | 160.9 |
|         |     |        | 1000 | 40.0            | 96.7  | 158.9 |
|         | 4.3 | 1.08   | 550  | 31.9            | 113.4 | 165.1 |
|         |     |        | 775  | 37.0            | 103.9 | 162.7 |
|         |     |        | 1000 | 41.1            | 97.6  | 160.9 |

**SHW-2153010**

| Ent Wtr | GPM | PD FT. | CFM  | 60 DegF Ent Air |       |       |
|---------|-----|--------|------|-----------------|-------|-------|
|         |     |        |      | TTL MBH         | LAT F | LWT F |
| 180     | 7.1 | 5.79   | 1200 | 70.9            | 114.1 | 160.0 |
|         |     |        | 1700 | 82.9            | 104.6 | 156.6 |
|         |     |        | 2200 | 92.2            | 98.4  | 154.0 |
|         | 8.5 | 7.86   | 1200 | 72.3            | 115.1 | 163.0 |
|         |     |        | 1700 | 84.8            | 105.7 | 160.0 |
|         |     |        | 2200 | 94.6            | 99.4  | 157.7 |
|         | 9.7 | 9.91   | 1200 | 73.1            | 115.8 | 164.9 |
|         |     |        | 1700 | 86.1            | 106.3 | 162.2 |
|         |     |        | 2200 | 96.2            | 100.0 | 160.1 |

**SHW-2202010**

| Ent Wtr | GPM | PD FT. | CFM  | 60 DegF Ent Air |       |       |
|---------|-----|--------|------|-----------------|-------|-------|
|         |     |        |      | TTL MBH         | LAT F | LWT F |
| 180     | 6.0 | 1.46   | 1000 | 56.9            | 112.1 | 161.0 |
|         |     |        | 1500 | 67.4            | 101.1 | 157.5 |
|         |     |        | 2000 | 75.0            | 94.3  | 155.0 |
|         | 7.5 | 1.95   | 1000 | 58.8            | 113.8 | 164.3 |
|         |     |        | 1500 | 70.2            | 102.8 | 161.3 |
|         |     |        | 2000 | 78.5            | 95.9  | 159.0 |
|         | 8.6 | 2.37   | 1000 | 59.8            | 114.8 | 166.1 |
|         |     |        | 1500 | 71.7            | 103.7 | 163.3 |
|         |     |        | 2000 | 80.5            | 96.8  | 161.3 |

**SHW-2252510**

| Ent Wtr | GPM  | PD FT. | CFM  | 60 DegF Ent Air |       |       |
|---------|------|--------|------|-----------------|-------|-------|
|         |      |        |      | TTL MBH         | LAT F | LWT F |
| 180     | 9.8  | 2.77   | 1800 | 97.1            | 109.4 | 160.2 |
|         |      |        | 2400 | 109.5           | 101.8 | 157.6 |
|         |      |        | 3000 | 119.3           | 96.4  | 155.6 |
|         | 11.2 | 3.43   | 1800 | 99.0            | 110.3 | 162.3 |
|         |      |        | 2400 | 112.0           | 102.7 | 160.0 |
|         |      |        | 3000 | 122.3           | 97.3  | 158.1 |
|         | 12.5 | 4.11   | 1800 | 100.4           | 111.1 | 163.9 |
|         |      |        | 2400 | 113.9           | 103.4 | 161.8 |
|         |      |        | 3000 | 124.7           | 98.0  | 160.0 |

**SHW-2253010**

| Ent Wtr | GPM  | PD FT. | CFM  | 60 DegF Ent Air |       |       |
|---------|------|--------|------|-----------------|-------|-------|
|         |      |        |      | TTL MBH         | LAT F | LWT F |
| 180     | 11.8 | 3.80   | 2000 | 114.1           | 112.2 | 160.6 |
|         |      |        | 2800 | 131.9           | 103.1 | 157.6 |
|         |      |        | 3600 | 145.6           | 97.0  | 155.3 |
|         | 14.1 | 5.14   | 2000 | 116.7           | 113.4 | 163.4 |
|         |      |        | 2800 | 135.6           | 104.3 | 160.8 |
|         |      |        | 3600 | 150.2           | 98.2  | 158.7 |
|         | 16.0 | 6.41   | 2000 | 118.4           | 114.2 | 165.2 |
|         |      |        | 2800 | 137.9           | 105.1 | 162.7 |
|         |      |        | 3600 | 153.2           | 98.9  | 160.8 |

## HOT WATER HEATING CORRECTION FACTORS

| Entering Air Temp (F) | Entering Water Temp (F) |      |      |      |      |      |      |       |       |
|-----------------------|-------------------------|------|------|------|------|------|------|-------|-------|
|                       | 100°                    | 110° | 120° | 130° | 140° | 150° | 160° | 170°  | 180°  |
| 50°                   | .419                    | .500 | .579 | .665 | .742 | .838 | .917 | 1.000 | 1.090 |
| 55°                   | .376                    | .460 | .544 | .629 | .708 | .791 | .873 | .963  | 1.048 |
| 60°                   | .335                    | .419 | .500 | .579 | .665 | .742 | .838 | .917  | 1.000 |
| 65°                   | .290                    | .376 | .460 | .544 | .629 | .708 | .791 | .873  | .963  |
| 70°                   | .251                    | .335 | .419 | .500 | .579 | .665 | .742 | .838  | .917  |
| 75°                   | .205                    | .290 | .376 | .460 | .544 | .629 | .708 | .791  | .873  |
| 80°                   | .167                    | .251 | .335 | .419 | .500 | .579 | .665 | .742  | .838  |

When correction factors are used for various entering air and entering water temperatures, multiply the correction factor times the above listed capacity. The correction factors may be used with all Magic Aire published 180° E.W.T. heating capacities.

### 3 Row Heating

SHW-3130

| Ent<br>Wtr | GPM | PD<br>FT. | CFM  | 60 DegF Ent Air |          |          |
|------------|-----|-----------|------|-----------------|----------|----------|
|            |     |           |      | TTL<br>MBH      | LAT<br>F | LWT<br>F |
| 180        | 2.0 | 0.93      | 550  | 33.2            | 115.4    | 146.7    |
|            |     |           | 775  | 38.1            | 105.0    | 141.8    |
|            |     |           | 1000 | 41.7            | 98.2     | 138.3    |
|            | 4.0 | 2.03      | 550  | 37.2            | 122.2    | 161.3    |
|            |     |           | 775  | 43.9            | 111.9    | 158.0    |
|            |     |           | 1000 | 49.0            | 104.9    | 155.5    |
|            | 6.0 | 3.69      | 550  | 38.9            | 124.9    | 167.0    |
|            |     |           | 775  | 46.3            | 114.7    | 164.6    |
|            |     |           | 1000 | 52.0            | 107.6    | 162.6    |

SHW-3208

| Ent<br>Wtr | GPM  | PD<br>FT. | CFM  | 60 DegF Ent Air |          |          |
|------------|------|-----------|------|-----------------|----------|----------|
|            |      |           |      | TTL<br>MBH      | LAT<br>F | LWT<br>F |
| 180        | 4.0  | 1.10      | 900  | 58.9            | 120.0    | 150.5    |
|            |      |           | 1150 | 65.5            | 112.2    | 147.2    |
|            |      |           | 1400 | 70.8            | 106.3    | 144.6    |
|            | 8.0  | 2.63      | 900  | 65.5            | 126.6    | 163.6    |
|            |      |           | 1150 | 74.1            | 119.0    | 161.5    |
|            |      |           | 1400 | 81.2            | 113.1    | 159.7    |
|            | 10.0 | 3.73      | 900  | 66.9            | 128.1    | 166.6    |
|            |      |           | 1150 | 76.0            | 120.5    | 164.8    |
|            |      |           | 1400 | 83.7            | 114.7    | 163.3    |

SHW-3347

| Ent<br>Wtr | GPM  | PD<br>FT. | CFM  | 60 DegF Ent Air |          |          |
|------------|------|-----------|------|-----------------|----------|----------|
|            |      |           |      | TTL<br>MBH      | LAT<br>F | LWT<br>F |
| 180        | 10.0 | 3.34      | 1500 | 106.7           | 125.1    | 158.6    |
|            |      |           | 2000 | 122.6           | 116.1    | 155.5    |
|            |      |           | 2500 | 135.3           | 109.5    | 152.9    |
|            | 15.0 | 6.61      | 1500 | 111.6           | 128.1    | 165.1    |
|            |      |           | 2000 | 129.5           | 119.2    | 162.7    |
|            |      |           | 2500 | 143.9           | 112.7    | 160.8    |
|            | 20.0 | 11.10     | 1500 | 114.2           | 129.7    | 168.6    |
|            |      |           | 2000 | 133.2           | 120.9    | 166.7    |
|            |      |           | 2500 | 148.7           | 114.4    | 165.1    |

SHW-3417

| Ent<br>Wtr | GPM  | PD<br>FT. | CFM  | 60 DegF Ent Air |          |          |
|------------|------|-----------|------|-----------------|----------|----------|
|            |      |           |      | TTL<br>MBH      | LAT<br>F | LWT<br>F |
| 180        | 15.0 | 4.21      | 1800 | 132.6           | 127.4    | 162.3    |
|            |      |           | 2400 | 153.4           | 118.5    | 159.5    |
|            |      |           | 3000 | 170.3           | 111.9    | 157.3    |
|            | 20.0 | 6.84      | 1800 | 136.1           | 129.2    | 166.4    |
|            |      |           | 2400 | 158.3           | 120.4    | 164.2    |
|            |      |           | 3000 | 176.5           | 113.9    | 162.3    |
|            | 25.0 | 10.14     | 1800 | 138.2           | 130.3    | 168.9    |
|            |      |           | 2400 | 161.4           | 121.6    | 167.1    |
|            |      |           | 3000 | 180.5           | 115.1    | 165.5    |

### 4 Row Heating

SHW-4130

| Ent<br>Wtr | GPM  | PD<br>FT. | CFM  | 60 DegF Ent Air |          |          |
|------------|------|-----------|------|-----------------|----------|----------|
|            |      |           |      | TTL<br>MBH      | LAT<br>F | LWT<br>F |
| 180        | 6.0  | 5.71      | 550  | 45.6            | 135.9    | 164.8    |
|            |      |           | 775  | 54.9            | 124.9    | 161.7    |
|            |      |           | 1000 | 62.2            | 117.0    | 159.2    |
|            | 8.0  | 9.38      | 550  | 46.6            | 137.7    | 168.3    |
|            |      |           | 775  | 56.6            | 126.9    | 165.8    |
|            |      |           | 1000 | 64.5            | 119.1    | 163.9    |
|            | 10.0 | 14.02     | 550  | 47.3            | 138.8    | 170.5    |
|            |      |           | 775  | 57.6            | 128.1    | 168.5    |
|            |      |           | 1000 | 66.0            | 120.4    | 166.8    |

SHW-4208




| Ent<br>Wtr | GPM  | PD<br>FT. | CFM  | 60 DegF Ent Air |          |          |
|------------|------|-----------|------|-----------------|----------|----------|
|            |      |           |      | TTL<br>MBH      | LAT<br>F | LWT<br>F |
| 180        | 4.0  | 0.99      | 900  | 67.7            | 128.9    | 146.1    |
|            |      |           | 1150 | 75.7            | 120.2    | 142.1    |
|            |      |           | 1400 | 81.9            | 113.6    | 139.0    |
|            | 8.0  | 2.29      | 900  | 75.9            | 137.2    | 161.0    |
|            |      |           | 1150 | 86.7            | 129.0    | 158.3    |
|            |      |           | 1400 | 95.6            | 122.5    | 156.1    |
|            | 10.0 | 3.22      | 900  | 77.7            | 139.0    | 164.4    |
|            |      |           | 1150 | 89.2            | 131.0    | 162.1    |
|            |      |           | 1400 | 98.9            | 124.6    | 160.2    |

SHW-4347

| Ent<br>Wtr | GPM  | PD<br>FT. | CFM  | 60 DegF Ent Air |          |          |
|------------|------|-----------|------|-----------------|----------|----------|
|            |      |           |      | TTL<br>MBH      | LAT<br>F | LWT<br>F |
| 180        | 10.0 | 3.63      | 1500 | 125.5           | 136.5    | 154.9    |
|            |      |           | 2000 | 146.0           | 126.8    | 150.8    |
|            |      |           | 2500 | 162.4           | 119.4    | 147.5    |
|            | 15.0 | 7.23      | 1500 | 131.1           | 140.0    | 162.5    |
|            |      |           | 2000 | 154.3           | 130.6    | 159.4    |
|            |      |           | 2500 | 173.3           | 123.4    | 156.9    |
|            | 20.0 | 12.14     | 1500 | 134.0           | 141.8    | 166.6    |
|            |      |           | 2000 | 158.8           | 132.6    | 164.1    |
|            |      |           | 2500 | 179.2           | 125.6    | 162.1    |

SHW-4417

| Ent<br>Wtr | GPM  | PD<br>FT. | CFM  | 60 DegF Ent Air |          |          |
|------------|------|-----------|------|-----------------|----------|----------|
|            |      |           |      | TTL<br>MBH      | LAT<br>F | LWT<br>F |
| 180        | 15.0 | 2.53      | 1800 | 150.6           | 136.6    | 159.9    |
|            |      |           | 2400 | 175.5           | 126.9    | 156.6    |
|            |      |           | 3000 | 195.4           | 119.6    | 153.9    |
|            | 20.0 | 4.01      | 1800 | 155.4           | 139.0    | 164.4    |
|            |      |           | 2400 | 182.6           | 129.6    | 161.7    |
|            |      |           | 3000 | 204.7           | 122.4    | 159.5    |
|            | 25.0 | 5.87      | 1800 | 158.5           | 140.6    | 167.3    |
|            |      |           | 2400 | 187.1           | 131.4    | 165.0    |
|            |      |           | 3000 | 210.6           | 124.3    | 163.1    |

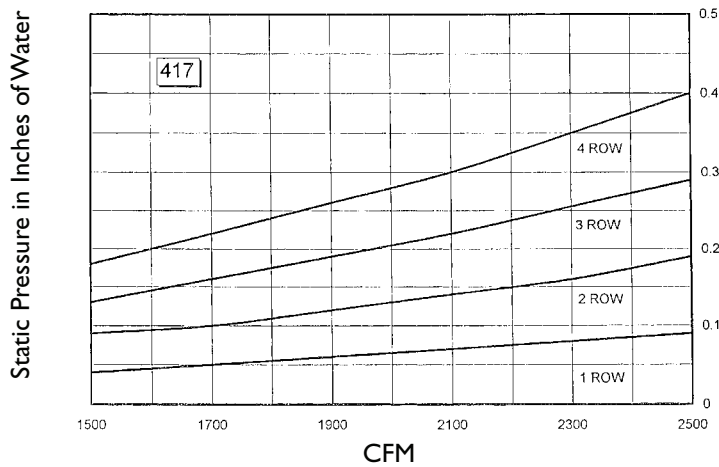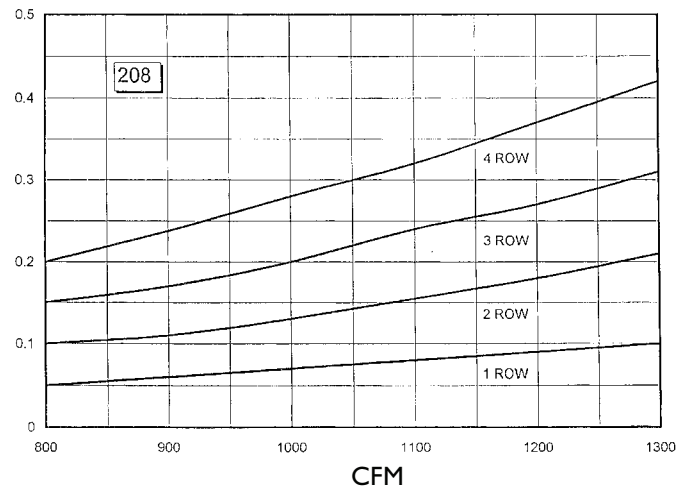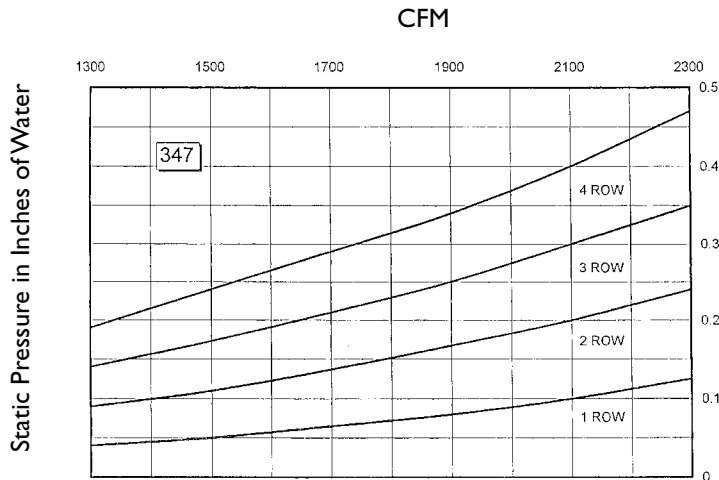



**MAGIC AIRE HOT WATER COILS ARE TESTED TO U.S. AND  
CANADIAN SAFETY STANDARDS AND ARE ASSEMBLED FOR  
COMPETITIVE DELIVERY.**

**UNITED ELECTRIC COMPANY, L.P.**

501 Galveston St. • Wichita Falls, Texas 76301 • 940-397-2100 • [customer.service@magicaire.com](mailto:customer.service@magicaire.com)