

SharkBite[®] EvoPEX[™] PEX Stub-Out

DESCRIPTION

SharkBite EvoPEX PEX stub-outs are for use in residential or commercial systems and approved for potable water and glycol (up to 100% mix) in hot and cold domestic water systems as well as radiant heating systems. SharkBite EvoPEX PEX Stub-outs are intended to be installed with SharkBite PEX pipe as a holistic system.

FEATURES AND BENEFITS

1/2 in PEX with pre-molded cap

Optional intergraded bracket to attached stub-out to stud or support bracket

Ideal for fixture stub-outs from a wall or up through the floor

TECHNICAL DATA

Performance:

Pressure @ Temperature Ratings

- Minimum working temperature 33°F (0.5°C) at 160 psi
- Maximum working temperature 200°F (93.3°C) at 80 psi
- Maximum working pressure is 160 psi at 33° F (0.5°C) 70° F (21.1°C)

CERTIFICATIONS

SharkBite EvoPEX PEX stub-outs are approved for use in all national and local codes in the US and Canada. Certified and listed to the following standards:

- ANSI/NSF 61 Drinking Water System Components Health Effects
- ANSI/NSF 14 Plastics Piping System Components and Related Materials
- ASTM F876 Standard for Cross-linked Polyethylene (PEX) Tubing
 - ASTM F2023 Standard Test Method for Evaluating the Oxidative Resistance of Crosslinked Polyethylene (PEX) Pipe, Tubing and Systems to Hot Chlorinated Water
 - ASTM F2657 Standard Test Method for Outdoor Weathering Exposure of Crosslinked Polyethylene (PEX) Tubing
- ASTM F877 Standard for Cross-linked Polyethylene (PEX) Hot- and Cold-Water Distribution Systems
- CSA B137.5 Thermoplastic Pressure Piping Compendium

Patent pending

SPECIFICATION


SharkBite EvoPEX PEX stub-outs shall be installed on SharkBite EvoEPX fittings complying with ASSE 1061, or SharkBite insert fittings complying with ASTM F1807 or ASMT F2159. The stub-out shall be used in a potable water or radiant heating system not to exceed 80 psi @ 200°F, 100 psi @ 180°F, or 160 psi @ 73.4°F





SharkBite[®] EvoPEX[™] PEX Stub-Out

SKU	Description	Α	В
K25578WP12	1/2 in. x 6 in. PEX Stub Out with Bracket, Cap and EvoPEX 1/2 in. 90 (12 pack)	6.89	1.35
K24649WP	1/2 in. x 6 in. PEX Stub Out with Bracket and Cap	6.89	1.35
K25581WP12	1/2 in. x 6 in. PEX Stub Out with Cap and EvoPEX 1/2 in. 90 (12 pack)	6.89	
K24650WP	1/2 in. x 6 in. PEX Stub Out with Cap	6.89	
K25721WP12	1/2 in. x 10 in. PEX Stub Out with Bracket, Cap and EvoPEX 1/2 in. 90 (12 Pack)	10.16	4.00
K25721WP	1/2 in. x 10 in. PEX Stub Out with Bracket and Cap	10.16	4.00
K25722WP12	1/2 in. x 10 in. PEX Stub Out with Cap and EvoPEX 1/2 in. 90 (12 Pack)	10.16	
K25722WP	1/2 in. x 10 in. PEX Stub Out with Cap	10.16	
K25723WP	1/2 in. x 20 in. PEX Stub Out with Bracket and Cap	20.16	4.00

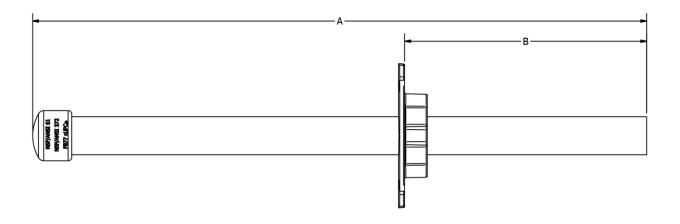

RWC