

For Residential and Commercial Applications

Job Name		Engineer / Architect	
Job Location		Wholesaler	
Submittal Date		Contractor	

B8-**DL Speedi Plumb® PLUS Braided Toilet Connectors - Female Iron Pipe Inlet

Use: For use in potable water distribution systems in accessible locations only.

Design Features:

- **Superior corrosion resistance** to harsh chemicals found in common household cleaning and plumbing repair products
- **More flexible than stainless steel**, the braided polymer-coated fibers bend freely without kinking or crimping
- **Tough inner core** is reinforced to resist chlorine and chloramine leaching and deterioration
- **Nitrile rubber washers** provide a large pliable sealing surface and ensures a long lasting water tight connection
- **8-sided pneumatic crimp** provides greater dependability for realible nut-to-hose connections

Operating Specifications:

Temperature: 40°- 140° F, intermittent to 180° F
Pressure: 125 psi maximum


Tubing Diameter: 0.300" I.D. (0.550" O.D.)

MATERIAL SPECIFICATIONS

Inner Hose	<i>Reinforced PVC</i>
Braiding	<i>PVC coated polyester yarn</i>
Barb	<i>Compliant brass</i>
Ferrule	<i>Zinc plated 1008 steel</i>
Nut	<i>C36000 brass or polypropylene</i>
Washer	<i>Nitrile rubber</i>
Compression Ring & Nut	<i>C36000 brass</i>

Part Listing:

<input type="checkbox"/>	B8-9DL F	1/2" F.I.P. x 7/8" Ballcock x 9" Length
<input type="checkbox"/>	B8-12DL F	1/2" F.I.P. x 7/8" Ballcock x 12" length
<input type="checkbox"/>	B8-16DL F	1/2" F.I.P. x 7/8" Ballcock x 16" length
<input type="checkbox"/>	B8-20DL F	1/2" F.I.P. x 7/8" Ballcock x 20" length

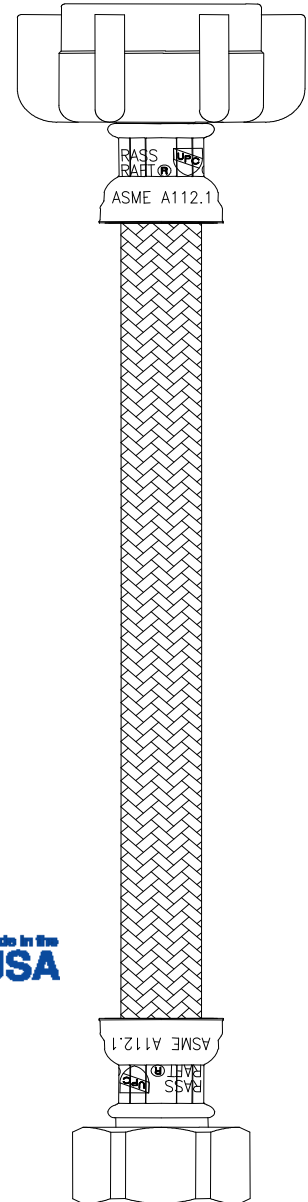


B8-**DL Speedi Plumb® PLUS Braided Toilet Connectors -

This specification and all information contained herein is the confidential and exclusive property of BrassCraft Manufacturing, and shall not be disclosed to others without the written consent of BrassCraft. This specification must be returned to BrassCraft if requested.

BrassCraft®

Female Iron Pipe Inlet

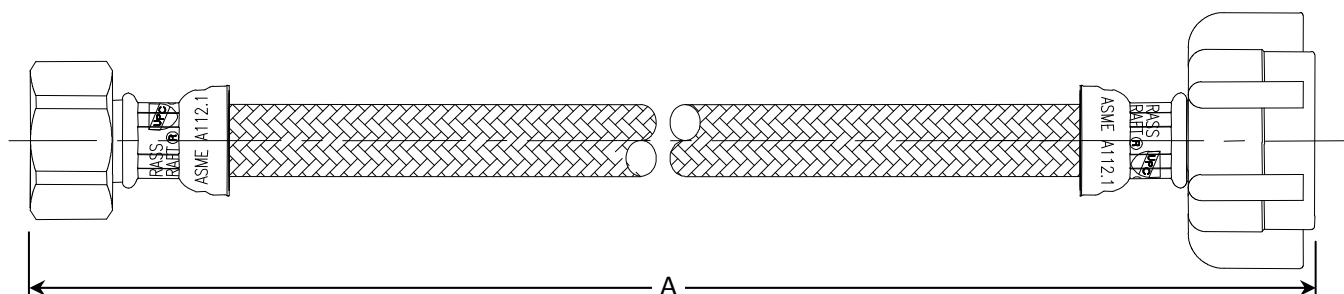

PART DIMENSIONS (Inches)	
Model	DIM. A
B8-9DL	9.0 / 10.0
B8-12DL	12.0 / 13.0
B8-16DL	16.0 / 17.0
B8-20DL	20.0 / 21.0

Listings & Certifications:

- IAPMO listed to ASME A112.18.6-2003 (File # 0452)
- CSA listed to ASME A112.18.6-2003 / CSA B125 (File # 204593)



This specification and all information contained herein is the confidential and exclusive property of BrassCraft Manufacturing, and shall not be disclosed to others without the written consent of BrassCraft. This specification must be returned to BrassCraft if requested.

BrassCraft®