

Avid[™] Rite-Temp[®] valve trim with lever handle K-TS97018-4

Features

- Single handle controls both on/off activation and temperature settings.
- ADA-compliant ergonomic handle.
- Coordinates with other products in the Avid collection.

Material

- Premium material construction with metal handle ensures reliability and durability.
- KOHLER finishes resist corrosion and tarnishing.

Installation

Bath- or deck-mount.

Required Products/Accessories

K-304/K-P304 Series Rite-Temp® Valves

or

K-8304/K-P8304 Series Rite-Temp $\ensuremath{\mathbb{R}}$ Valve & Cartridge Kits or

K-8300/K-P8300 Series Rite-Temp® Valve Body Rough-ins K-8305/K-P8305 Series Rite-Temp® Cartridges

or

K-2971-KS 3/4" Pressure-balancing Valve

Recommended Products/Accessories

K-23723 Faucet cleaner

Optional Products/Accessories

K-10350 Deep Rough-In Kit For K-8305 Cartridges K-10351 Test Cap For K-8300 Series Valve Bodies

Included Components

Product consists of: K-349 Slidebar Trim Kit K-9514 60" Shower Hose K-T397-4 Rite-Temp® Bath and Shower Valve Trim K-8524 30" Slidebar K-10591 Multifunction Showerhead K-9511 Showerarm and Diverter 1055527 Handshower Relaxing



ADA CSA B651 OBC

Codes/Standards

ASME A112.18.1/CSA B125.1 DOE - Energy Policy Act 1992 ADA ICC/ANSI A117.1 CSA B651 OBC

KOHLER[®] Faucet Lifetime Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.

Color Code Description

- 81		
- 81		
- 11		
- 11		
- 11		
	_	
- 10		
- 10		


CP Polished Chrome

BN Vibrant® Brushed Nickel



KOHLER, Faucets

Avid™ Rite-Temp® valve trim with lever handle K-TS97018-4

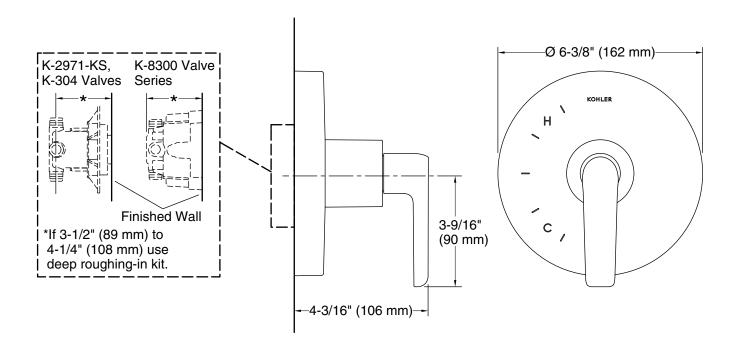

Technical Information

All product dimensions are nominal. No

Drain included:

Handshower:

Rated maximum flow: 2.5 gal/min (9.5 l/min) Pressure: 80 psi (5.5 bar)

Showerhead/Body Spray:

Rated maximum flow: 2.5 gal/min (9.5 l/min) 80 psi (5.5 bar) Pressure:

Notes

Install this product according to the installation instructions.

NOTICE: Risk of product damage. Long screws, for installing trim, can damage the K-2971-KS valve. Consult the trim installation guide to verify if the thin wall installation kit (88526) is needed.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

