



The new degree of comfort.™



Gas Furnaces
R801V (UF/HZ) Ultra Low NOx Series

Rheem *Classic Plus*® Series Upflow/Horizontal Ultra Low NOx Gas Furnace

R801V- Upflow/Horizontal Series

80% A.F.U.E.†

Input Rates 50-100 kBTU



†A.F.U.E. (Annual Fuel Utilization Efficiency) calculated in accordance with Department of Energy test procedures.

- Certified Unit meets 14ng/j NOx emission standard
- Environmentally friendly and responsible product that reduces NOx emissions by 65%
- 80% residential Gas Furnace CSA certified
- 3 way multi poise design UF / HZ
- PlusOne™ Diagnostics — 7 Segment LED all units
- PlusOne™ Ignition System – DSI for reliability and longevity
- Heat exchanger is removable for improved serviceability. Stainless/Aluminized steel construction provides maximum corrosion resistance and thermal fatigue reliability.
- Solid doors provide quiet operation
- Solid bottom
- Insulated blower compartment
- Low profile 34" cabinet ideal for space constrained installations
- Blower shelf design – serviceable in all furnace orientations
- Hemmed edges on cabinets and doors
- 1/4 turn door knobs for tool less access
- Integrated Control board features dip switches for easy system set up
- QR code for quick access to product information from your smart phone or tablet
- ECM motor provides constant CFM for single and two-stage cooling and heat pump products.
- Cabinet air leakage less than 2% at 1 inch H₂O when tested in accordance with ASHRAE standard 193



INTEGRATED HOME COMFORT

FORM NO. G11-560

TABLE OF CONTENTS

Standard & Optional Equipment3

Model Features/Physical Data & Specifications4


Model Number Identification5

Dimensional Data6-7

Blower Performance Data.....8

Accessories.....9

Limited Warranty10

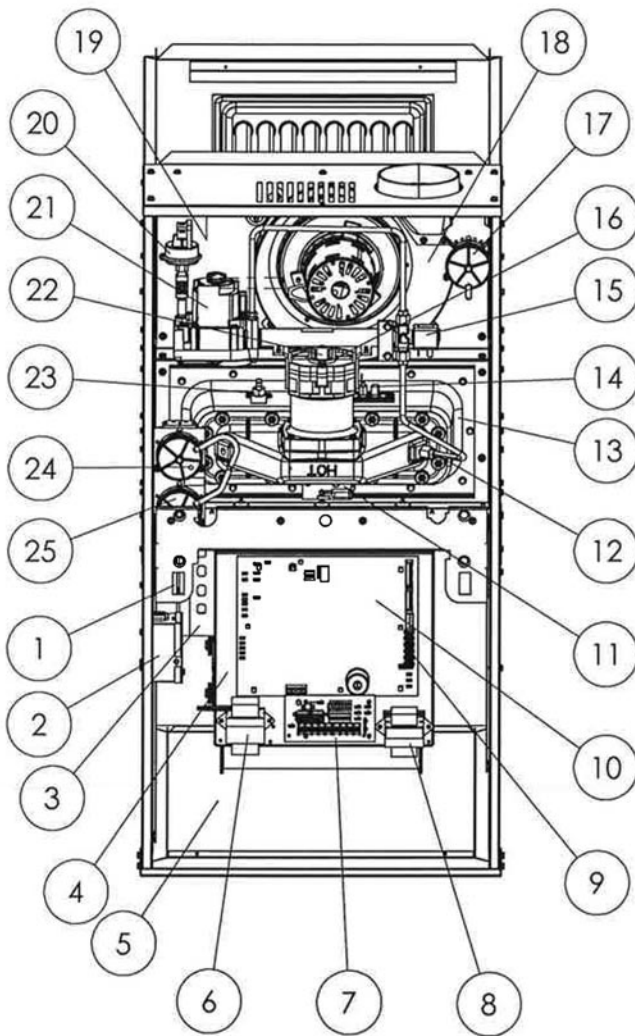

ITEM

NO. DESCRIPTION

1. DOOR SWITCH
2. JUNCTION BOX
3. ECM BLOWER MOTOR
4. CONTROL MOUNTING PLATE
5. SOLID METAL BASE PAN
6. POWER FACTOR CHOKE
7. ECM INTERFACE CONTROL
8. TRANSFORMER
9. LOW VOLTAGE TERMINALS
10. FURNACE CONTROL
11. FLAME LED BOARD (ALT FLAME LIGHT)
12. PILOT ORIFICE
13. BURNER ASSEMBLY
14. IGNITOR/FLAME SENSE
15. PILOT SOLENOID (PLSD)
16. COMBUSTION AIR INLET / FILTER (if equipped)
17. AIR INLET PRESSURE SWITCH (AIPS)
18. INDUCED DRAFT BLOWER
19. MAIN LIMIT
20. GAS PRESSURE SWITCH
21. GAS VALVE W/PILOT
22. ORIFICE
23. OVER-TEMPERATURE SWITCH (X3)
24. COMBUSTION PRESSURE SWITCH IGNITION
25. PRESSURE SWITCH

Illustration
ST-A1252-27-02

STANDARD EQUIPMENT

Completely assembled and wired; induced draft; pressure switch; redundant main gas control; blower compartment door safety switch; solid state time on/time off blower control; limit control; manual shut-off valve, pressure regulator for natural gas; transformer; direct drive constant speed blower motor. Furnaces are equipped with cooling/heating relay and transformer (40VA) ready for air conditioning and two-stage heat pump applications. (Please note: a thermostat is not included as standard equipment.) Flame sensor diagnostics.

OPTIONAL EQUIPMENT

Side and bottom filter frame assembly. Return air cabinet for all sizes.

NOTE: Furnace is not listed for use with fuel other than natural gas.

The complete terms of limited and other warranties are available at our sales office, or through local installer.

NOTE: For natural gas models, direct spark ignition is 100% safety lockout type.

WARNING

THIS FURNACE IS NOT APPROVED
OR RECOMMENDED
FOR USE IN MOBILE HOMES

Model Features

- 80% residential Gas Furnace CSA certified
- 3 way multi poise design UF / HZ
- PlusOne™ Diagnostics — 7 Segment LED all units
- PlusOne™ Ignition System – DSI for reliability and longevity
- Heat exchanger is removable for improved serviceability. Aluminized steel construction provides maximum corrosion resistance and thermal fatigue reliability.
- Solid doors provide quiet operation
- Solid bottom
- Insulated blower compartment
- Low profile 34" cabinet ideal for space constrained installations
- Blower shelf design serviceable in all furnace orientations
- Hemmed edges on cabinets and doors
- 1/4 turn door knobs for tool less access
- Integrated Controls board features dip switches for easy system set up
- QR code for quick access to product information from your smart phone or tablet
- ECM motor provides constant CFM.
- ECM Interface Control for single or two-stage AC and heat pumps.

Physical Data and Specifications

| MODEL NUMBERS R801V SERIES | R801VA050417MUA | R801VA070417MUA | R801VA100521MUA |
|-------------------------------------|------------------------|------------------------|------------------------|
| Input-BTU/Hr [kW] ① | 50,000 [14.6] | 70,000 [20.5] | 100,000 [29] |
| Heating Capacity BTU/Hr [kW] ② | 40,000 [11.7] | 56,000 [16.4] | 80,000 [23.4] |
| Heat Ext. Static Pressure [kPa] | .18 [.05] | .20 [.05] | .28 [.07] |
| Blower (D x W) [mm] | 11 x 6 [279 x 152] | 11 x 7 [279 x 178] | 11 x 10 [279 x 254] |
| Motor H.P.–Speed– Type [W] | 3/4 HP ECM Motor [560] | 3/4 HP ECM Motor [560] | 3/4 HP ECM Motor [560] |
| Min. Circuit Ampacity | 13 | 13 | 14 |
| Min. Overload Protection Device | 15 | 15 | 15 |
| Max. Overload Protection Device | 20 | 20 | 20 |
| Factory Heating CFM | 775 | 1072 | 1349 |
| Cooling CFM @ Rating Point [L/s] | 1498 [707] | 1498 [707] | 1772 [836] |
| Max. E.S.P. (In. W.C.) [kPa] | 1.0 [.25] | 1.0 [.25] | 1.0 [.25] |
| Temperature Rise Range °F [°C] | 35-65 [19.4-36.1] | 35-65 [19.4-36.1] | 35-65 [19.4-36.1] |
| Max. Outlet Air Temp. °F [°C] | 180 [82.2] | 180 [82.2] | 180 [82.2] |
| Approx. Shipping Weight (Lbs.) [kg] | 125 [57] | 125 [57] | 140 [64] |
| AFUE ① | 80.0% | 80.0% | 80.0% |

NOTES: All models are 115V, 60HZ, 1 Ph. Gas connection size for all models is 1/2" [12 mm] N.P.T.

① This model does not require any component changes at elevations 0-5,500 ft. above sea level. At elevations higher than 2,000 ft. these models do require a 2% de-rate for every 1,000 ft. of elevation above sea level.

② In accordance with D.O.E test procedures.

This furnace meets air district requirements of 14 ng/J NOx emissions limit, and thus is eligible for the Clean Air Furnace Rebate Program:
www.CleanAirFurnaceRebate.com in SCAQMD.

[] Designates Metric Conversions



Model Number Identification

| <u>R</u> | <u>80</u> | <u>1</u> | <u>V</u> | <u>A</u> | <u>070</u> | <u>4</u> | <u>17</u> | <u>M</u> | <u>U</u> | <u>A</u> |
|----------|------------------|------------------|--------------------------|---|---|--|--|-----------|----------------------------------|---|
| Rheem | 80 = 80% AFUE | 1 = Single Stage | V = Variable Speed | Design Series A = 1st Design B = 2nd Design | Input BTU/HR [kW] 050 = 50,000 [15] 070 = 70,000 [22] 100 = 98,000 [29] | 4 = 1 1/2 to 4 Ton 5 = 1 1/2 to 5 Ton | Cabinet Width 17 = 17.5" 21 = 21" | M = Multi | U = Ultra Low NO _x | Revision- Marketing (A – First Time Release) |

[] Designates Metric Conversions

Upflow Application

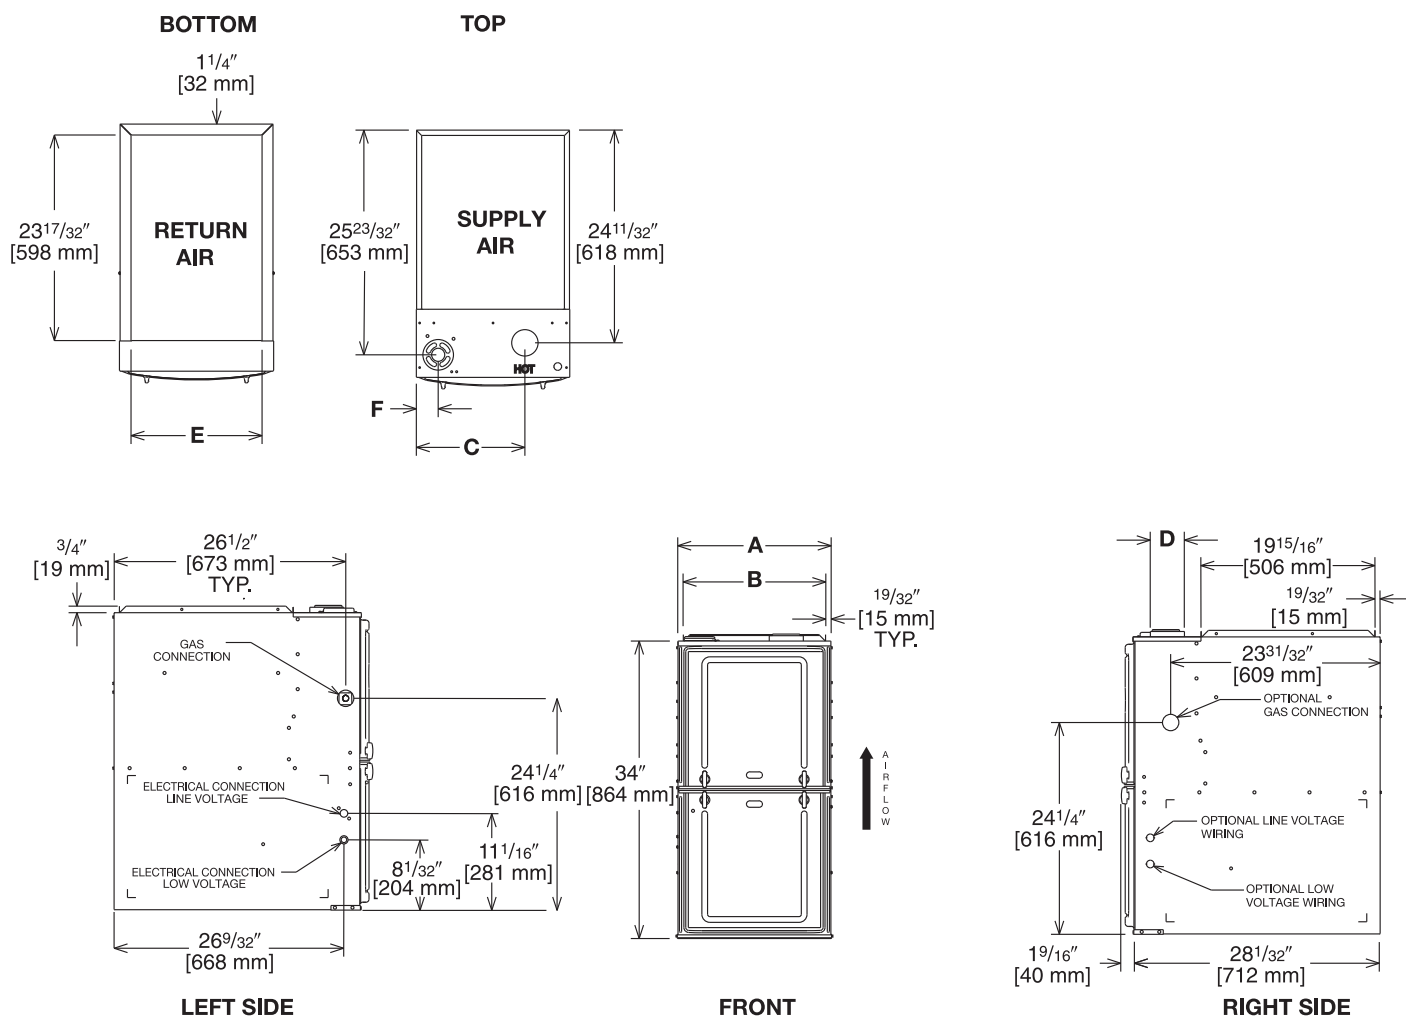


Illustration
ST-A1220-04-00
FIGURE 1

Dimensional Data: Upflow Model

| MODEL R801V- | A | B | C | D | E | F | MINIMUM CLEARANCE (IN.) [mm] | | | | | | SHIP WGTS. (LBS.) [kg] |
|-----------------|--------------|----------------|--------------|---|--------------|------------|------------------------------|---------------|------|--------|--------|-----------|------------------------------|
| | | | | | | | LEFT SIDE | RIGHT SIDE | BACK | TOP | FRONT | VENT | |
| 050/070 | 17 1/2 [445] | 16 11/32 [415] | 12 3/8 [314] | ① | 15 [381] | 2 1/2 [64] | 0 | 3 [76] ② | 0 | 1 [25] | 3 [76] | 6 [152] ③ | 125 [57] |
| 100 | 21 [533] | 19 27/32 [504] | 14 1/8 [359] | ① | 18 1/2 [470] | 2 1/2 [64] | 0 | 0 | 0 | 1 [25] | 3 [76] | 6 [152] ③ | 140 [64] |

NOTES: ① May require a 3" [76 mm] to 4" [102 mm] or 3" [76 mm] to 5" [127 mm] adapter.


② May be 0" [0 mm] with type B vent.

③ May be 1" [25 mm] with type B vent.

Furnaces must be vented in accordance with the National Fuel Gas Code, ANSI Z223.1 and in accordance with local codes.

[] Designates Metric Conversions

Horizontal Application

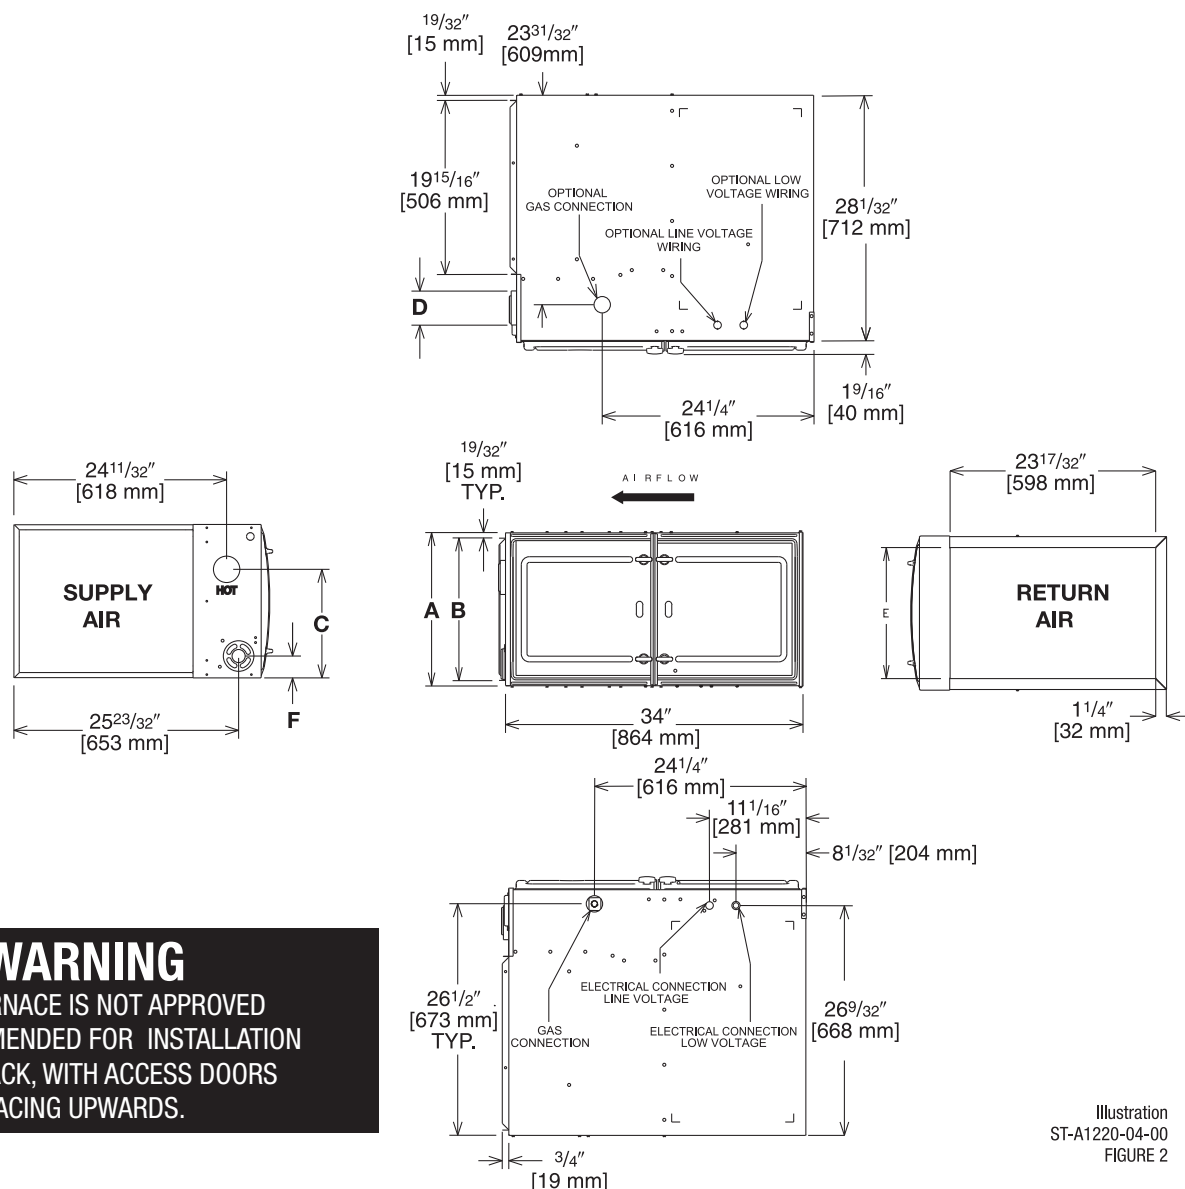

Dimensional Data: Horizontal Model

| MODEL R801V- | A | B | C | D | E | F | MINIMUM CLEARANCE (IN.) [mm] | | | | | | SHIP WGTS. (LBS.) [kg] |
|-----------------|--------------|----------------|--------------|---|--------------|------------|------------------------------|--------------------|------|--------|--------|-----------|------------------------------|
| | | | | | | | SUPPLY AIR SIDE | RETURN AIR SIDE | BACK | TOP | FRONT | VENT | |
| 050/070 | 17 1/2 [445] | 16 1/32 [415] | 12 3/8 [314] | ① | 15 [381] | 2 1/2 [64] | 3 [76] ② | 3 [76] ② | 0 | 1 [25] | 3 [76] | 6 [152] ③ | 125 [57] |
| 100 | 21 [533] | 19 27/32 [504] | 14 1/8 [359] | ① | 18 1/2 [470] | 2 1/2 [64] | 0 | 0 | 0 | 1 [25] | 3 [76] | 6 [152] ③ | 140 [64] |

NOTES: ① May require a 3" [76 mm] to 4" [102 mm] or 3" [76 mm] to 5" [127 mm] adapter.

② May be 0" [0 mm] with type B vent.

③ May be 1" [25 mm] with type B vent.

Furnaces must be vented in accordance with the National Fuel Gas Code, ANSI Z223.1 and in accordance with local codes.

[] Designates Metric Conversions

Blower Performance Data

| (-)801VA050417MUA | | | | | | | |
|------------------------------|--------|---------|-----------------|---------|--------|-----------------|---------|
| | SW 1/2 | Cooling | Full Ton SW 3/4 | | | Half Ton SW 3/4 | |
| | | | Tonnage | Nominal | +10% | Tonnage | Nominal |
| | | | | OFF/OFF | ON/OFF | | OFF/ON |
| Cooling / Heat Pump Air Flow | ON/OFF | High | 4 TON | 1498 | 1648 | 3.5 TON | 1348 |
| | | Low | | 1124 | 1236 | | 1011 |
| | OFF/ON | High | 3 TON | 1121 | 1233 | 2.5 TON | 1009 |
| | | Low | | 841 | 925 | | 757 |
| | ON/ON | High | 2 TON | 762 | 838 | 1.5 TON | 686 |
| | | Low | | 572 | 629 | | 514 |
| Heating Airflow | SW 5/6 | OFF/OFF | OFF/ON | | | | |
| | | 775 | 698 | | | | |

| (-)801VA070417MUA | | | | | | | |
|------------------------------|--------|---------|-----------------|---------|--------|-----------------|---------|
| | SW 1/2 | Cooling | Full Ton SW 3/4 | | | Half Ton SW 3/4 | |
| | | | Tonnage | Nominal | +10% | Tonnage | Nominal |
| | | | | OFF/OFF | ON/OFF | | OFF/ON |
| Cooling / Heat Pump Air Flow | ON/OFF | High | 4 TON | 1498 | 1648 | 3.5 TON | 1348 |
| | | Low | | 1124 | 1236 | | 1011 |
| | OFF/ON | High | 3 TON | 1121 | 1233 | 2.5 TON | 1009 |
| | | Low | | 841 | 925 | | 757 |
| | ON/ON | High | 2 TON | 762 | 838 | 1.5 TON | 686 |
| | | Low | | 572 | 629 | | 514 |
| Heating Airflow | SW 5/6 | OFF/OFF | OFF/ON | | | | |
| | | 1072 | 966 | | | | |

| (-)801VA100521MUA | | | | | | | |
|------------------------------|--------|---------|-----------------|---------|--------|-----------------|---------|
| | SW 1/2 | Cooling | Full Ton SW 3/4 | | | Half Ton SW 3/4 | |
| | | | Tonnage | Nominal | +10% | Tonnage | Nominal |
| | | | | OFF/OFF | ON/OFF | | OFF/ON |
| Cooling / Heat Pump Air Flow | ON/OFF | High | 5 TON | 1772 | 1949 | 4.5 TON | 1595 |
| | | Low | | 1329 | 1462 | | 1196 |
| | ON/OFF | High | 4 TON | 1498 | 1648 | 3.5 TON | 1348 |
| | | Low | | 1124 | 1236 | | 1011 |
| | OFF/ON | High | 3 TON | 1121 | 1233 | 2.5 TON | 1009 |
| | | Low | | 841 | 925 | | 757 |
| | ON/ON | High | 2 TON | 762 | 838 | 1.5 TON | 686 |
| | | Low | | 572 | 629 | | 514 |
| Heating Airflow | SW 5/6 | OFF/OFF | OFF/ON | | | | |
| | | 1349 | 1215 | | | | |

Example: (-)801VA100521MUA requires 3-1/2 tons of air-
 Switches 1/2 = ON/OFF (4-tons). Switches 3/4 = OFF/ON (reduced CFM for 3-1/2 tons)

BOTTOM RETURN FILTER RACK FOR UPFLOW APPLICATION: RXGF-CB

SIDE RETURN FILTER RACK: RXGF-CD

| FILTER RACK FILTER SIZES* INCHES [mm] | | |
|---------------------------------------|--|--|
| MODEL | RXGF-CB (UPFLOW/ HORIZONTAL) | RXGF-CD (UPFLOW) SIDE RETURN |
| R801TA050/ R801TA070 | 15 ³ / ₄ x 25 [400 x 635] | 15 ³ / ₄ x 25 [400 x 635] |
| R801TA100 | 19 ¹ / ₄ x 25 [489 x 635] | 15 ³ / ₄ x 25 [400 x 635] |

4" FLUE ADAPTER: RXGW-C01

INDOOR COIL CASINGS

| MODEL NUMBER |
|-----------------|
| RXBC-D17AI |
| RXBC-D21AI |
| RXBC-D21BI |

WARNING: IMPORTANT NOTICE

A SOLID METAL BASE PLATE (SEE TABLE) MUST BE IN PLACE WHEN THE FURNACE IS INSTALLED WITH SIDE AIR RETURN DUCTS. FAILURE TO INSTALL A BASE PLATE COULD CAUSE PRODUCTS OF COMBUSTION TO BE CIRCULATED INTO THE LIVING SPACE AND CREATE POTENTIALLY HAZARDOUS CONDITIONS.

| FURNACE WIDTH IN. [mm] | SOLID BOTTOM KIT NO. | BASE PLATE NO. | BASE PLATE SIZE IN. [mm] |
|--------------------------------------|----------------------------|-------------------|--|
| 17 ¹ / ₂ [445] | RXGB-D17 | AE-61874-02 | 15 ¹ / ₈ x 23 ⁹ / ₁₆ [384 x 598] |
| 21 [533] | RXGB-D21 | AE-61874-03 | 18 ⁵ / ₈ x 23 ⁹ / ₁₆ [473 x 598] |

[] Designates Metric Conversions

GENERAL TERMS OF LIMITED WARRANTY*

Rheem will furnish a replacement for any part of this product which fails in normal use and service within the applicable period stated, in accordance with the terms of the limited warranty.

***For complete details of the Limited and Conditional Warranties, including applicable terms and conditions, contact your local contractor or the Manufacturer for a copy of the product warranty certificate.**

Conditional Parts* (Registration Required)Ten (10) Years
Heat ExchangerTwenty (20) Years



The new degree of comfort.™

In keeping with its policy of continuous progress and product improvement, Rheem reserves the right to make changes without notice.

Rheem Heating, Cooling & Water Heating • 5600 Old Greenwood Road
Fort Smith, Arkansas 72908 • www.rheem.com

Rheem Canada Ltd./Ltée • 125 Edgeware Road, Unit 1
Brampton, Ontario • L6Y 0P5



INTEGRATED HOME COMFORT

PRINTED IN U.S.A. 4/20 QG FORM NO. G11-560