

GREYFIELD

THERMOSTATIC SHOWER VALVE

SKU: 948556



FEATURES

Material: Brass
Shape: Round
Handle Type: Lever
Features: Thermostatic
Assembly Required: No
Installation Type: Wall
Metal Handle
Mounting Hardware Included: Yes
For Proper Installation, Requires Use of
Volume Control Valve and Trim
Temperature Outlet Factory Preset to 104
Degrees Fahrenheit
Temperature Can Be Easily Adjusted Up and
Down to User's Comfort Level
Scald Guard Protection
High Temperature Limit Stop
Thermostatic Technology Keeps Shower
Temperature Within 1 Degree Celsius
Optional Rough-in Valve

CONTENTS


TRIM PAGE 2
VALVE PAGE 3

REVISED 10/05/2020

GREYFIELD

THERMOSTATIC SHOWER VALVE

SKU: 948556

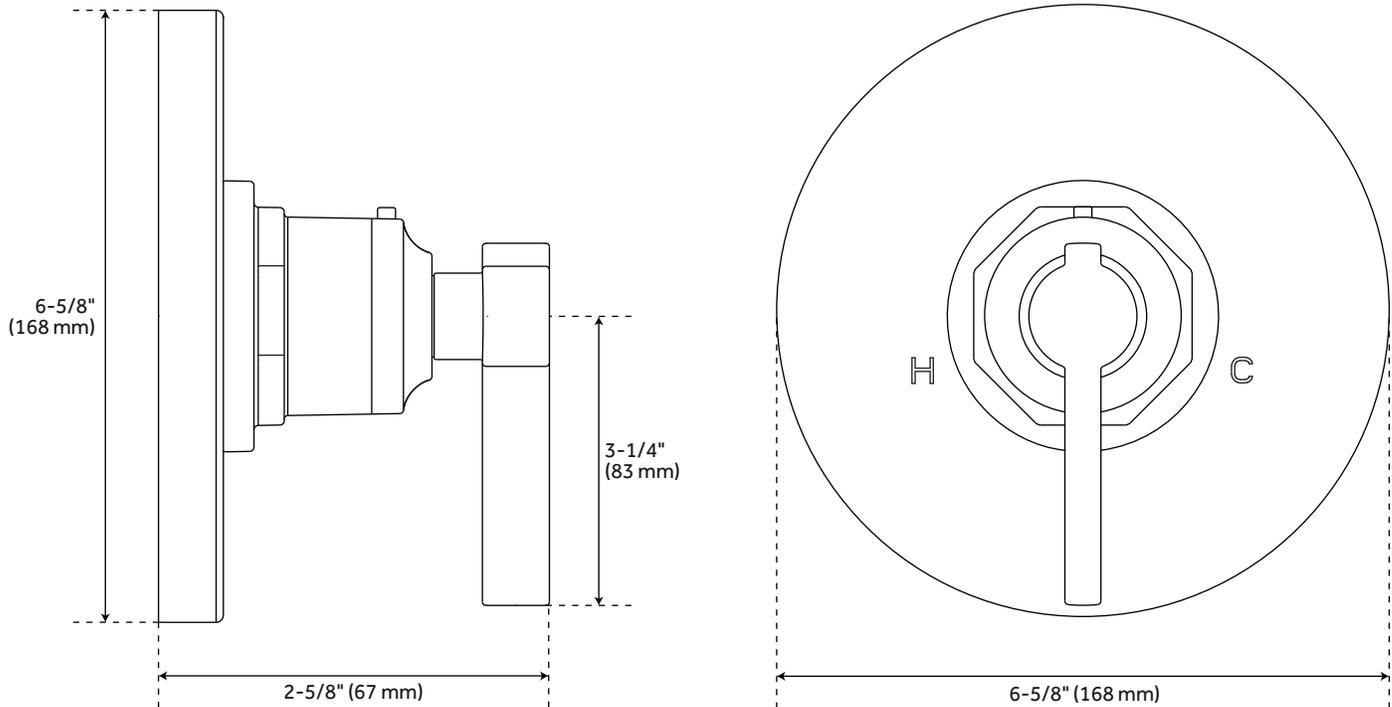

FEATURES

Diameter: 6-5/8"
Depth: 2-5/8"
Wall Thickness Range: 1" to 1-3/4"

CODES/STANDARDS

cUPC
ASME A112.18.1/CSA B125.1
Massachusetts Accepted

PRODUCT IMAGE





All dimensions and specifications are nominal and may vary. Use actual products for accuracy in critical situations.

PAGE 2
Code: SHGF9009

GREYFIELD

OPTIONAL THERMOSTATIC VALVE WITH 1/2" -OR- 3/4" CONNECTION

SKU: 948556

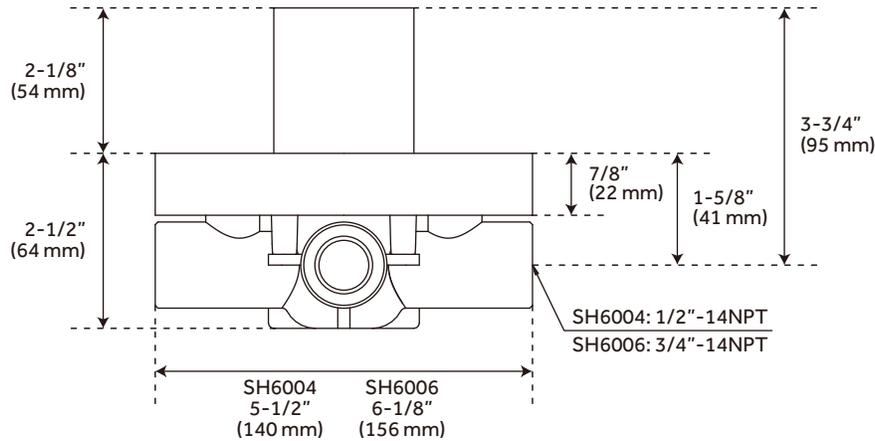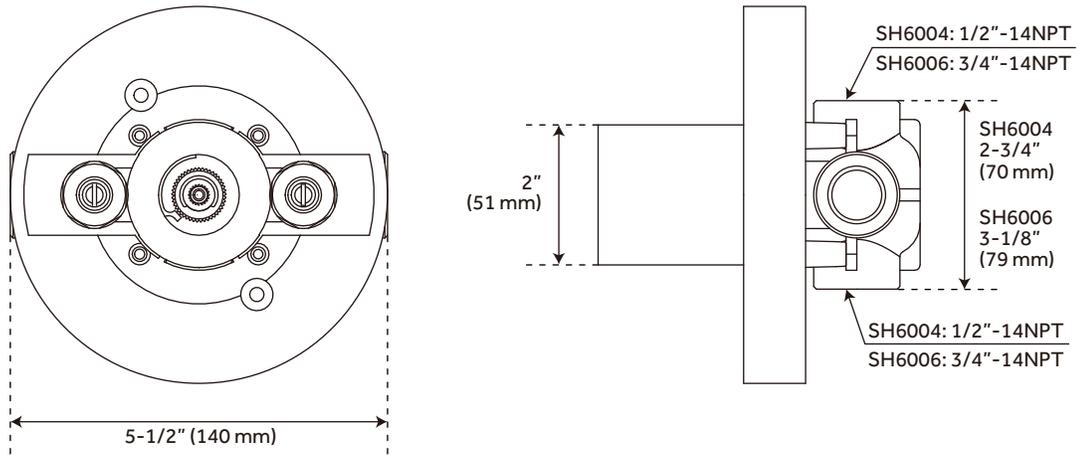

FEATURES

- Bronze Valve Body
- Ceramic Cartridge
- Integral Water Stops and Check Valve
- Recommended Valve Installation Depth 1-5/8" to 2-3/8"
- Must Be Installed in Accordance With Provided Installation Instructions

CODES/STANDARDS

- cUPC
- ASME A112.18.1/CSA B125.1
- ASSE 1016 Type T
- Massachusetts Accepted

PRODUCT IMAGE



All dimensions and specifications are nominal and may vary. Use actual products for accuracy in critical situations.

PAGE 3
Code: SH6004, SH6006