

DUCTMATE

Isolation Hanger Type SI


Rubber prevents vibrations from being transmitted from air ducts and other ventilation devices to parts of the building.

The load-bearing capacity of the hanger can be used to its full extent

Scale:

100	220
200	440
300	660
400	880
500	1100
KG	LBS

**Actual load
can be read
from scale.**

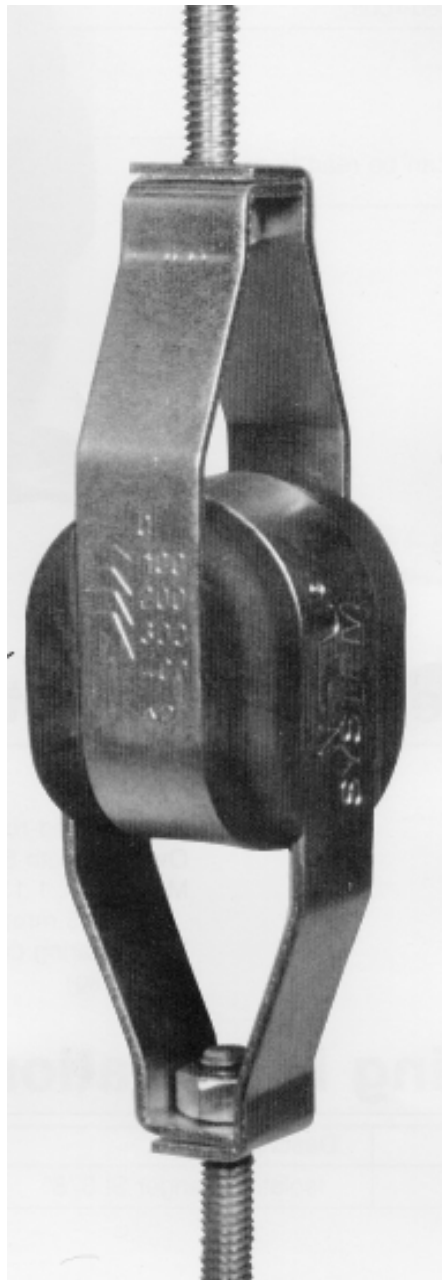


E. MONONGAHELA, PA	LODI, CA
1502 Industrial Drive	810 S. Cluff Ave
E. Monongahela, PA 15063-9709	Lodi, CA 95240-3141
800-245-3188	800-344-3270
724-258-0500	209-333-4680
FAX: 724-258-5494	FAX: 209-333-4678

www.ductmate.com



Isolation Hanger Type SI Features

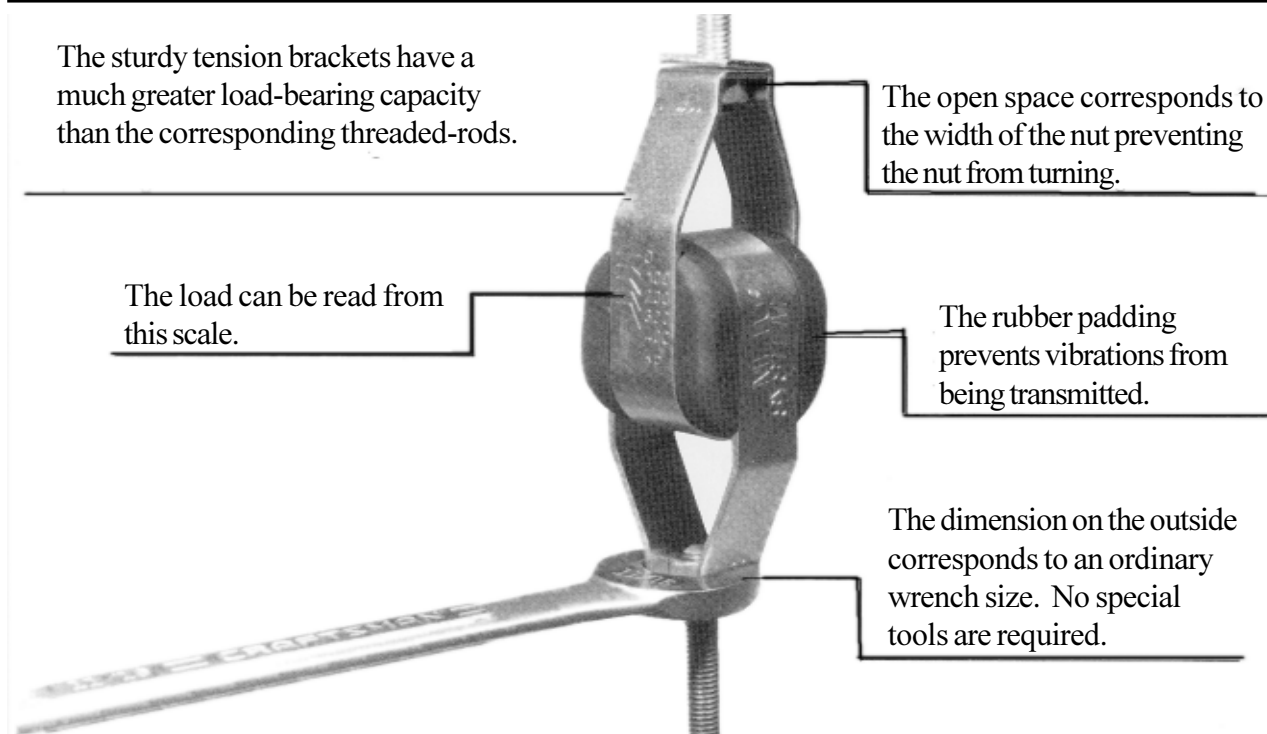

Load-Bearing Capacity And Dimensions

SI 3/8"

For threaded-rod 3/8"

Overall length 5 7/8" [150mm]

Max. width: 1 13/16" x 1 13/16"

[45 x 45 mm]

Load-bearing capacity: 1100 lbs. [500 kg]

Packaging Information

Part No.	Description	Packing Unit	Unit Weight
DM 2723 SI	Isolation Hanger SI 3/8"	50 pieces	37 lbs. [17 kg]



E. MONONGAHELA, PA
1502 Industrial Drive
E. Monongahela, PA 15063-9709
800-245-3188
724-258-0500
FAX: 724-258-5494

LODI, CA
810 S. Cluff Ave
Lodi, CA 95240-3141
800-344-3270
209-333-4680
FAX: 209-333-4678

www.ductmate.com

