



Hose Reel Accessories

0RK2



TAG:

Shut Off Control Valve

Architect/Engineering Specifications:

Shut off control valve with adjustable wall flange, 1/2" NPT female inlet and outlet, and 4-Arm handle. Certified to ASME A112.18.1/CSA B125.1, NSF 61-Section 9 and NSF 372. Meets ADA ANSI/ICC A117.1 requirements.

Job Name _____
 Model Specified _____ Quantity _____
 Variations Specified _____
 Date _____

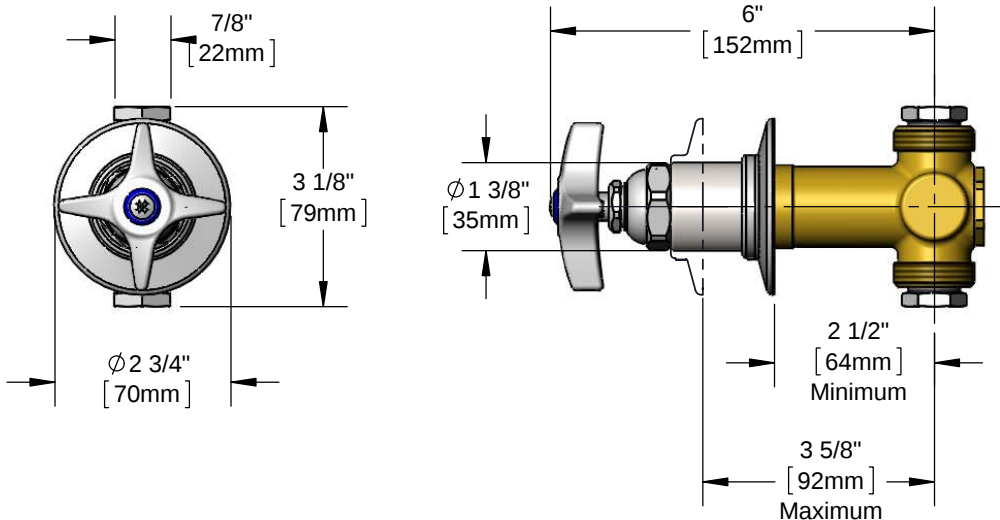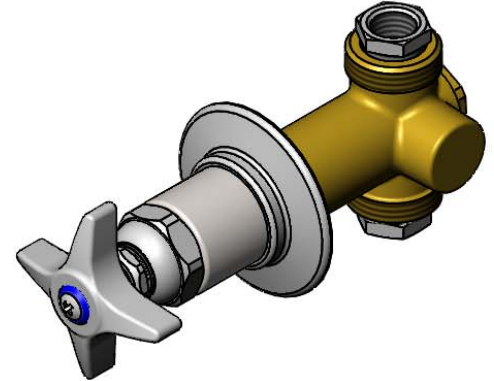

Features & Benefits:

- Shutoff / control valve
- Adjustable wall flange
- Concealed body type
- 1/2" NPT inlet and outlet
- 1/2" NPT male x 3/8" NPT female bushing included
- 4-Arm handle
- Designed for installation in line between mixing valve and hose reel
- Material: Rough brass body and polished chrome plated handle and escutcheon

Product Compliance:

- ASME A112.18.1 / CSA B125.1
- NSF 61 - Section 9
- NSF 372 (Low Lead Content)
- ANSI A117.1 (ADA)

Warranty: One Year (Limited)

Performance Data:

- Pressure: 20 - 125 psi
- Temperature: 40°F - 140°F
- Flow Rate: 5.50 GPM @ 60 psi



ADA Compliant



T&S BRASS AND BRONZE WORKS, INC.



• 2 Saddleback Cove • Travelers Rest, SC 29690
 Ph 800-476-4103 • Fax 864-834-3518
 • Simi Valley, CA • Ph 800-423-0150 • www.tsbrass.com

Date: 02/23/16