



# Foot Pedal Valves

## B-0504-01




TAG:

### Double Pedal Valve

#### Architect/Engineering Specifications:

Wall mount double pedal valve, chrome plated solid brass body, adjustable height aluminum pedals, self-closing valves, 1/2" NPT female loose key angle stop inlets, 3/8" NPT female loose key angle volume control outlet and mounting screws. Certified to ASME A112.18.1/CSA B125.1, NSF 61-Section 9 and NSF 372.

Job Name _____
Model Specified _____ Quantity _____
Variations Specified _____
Date _____

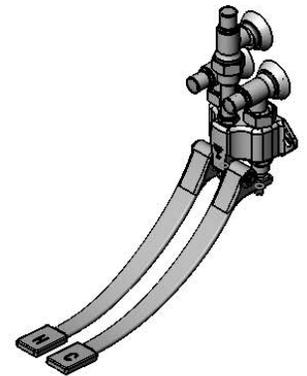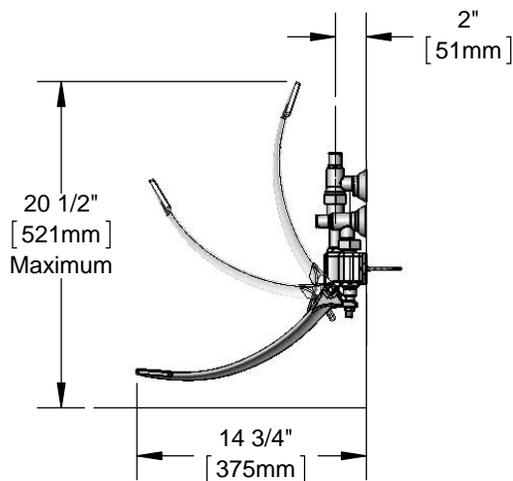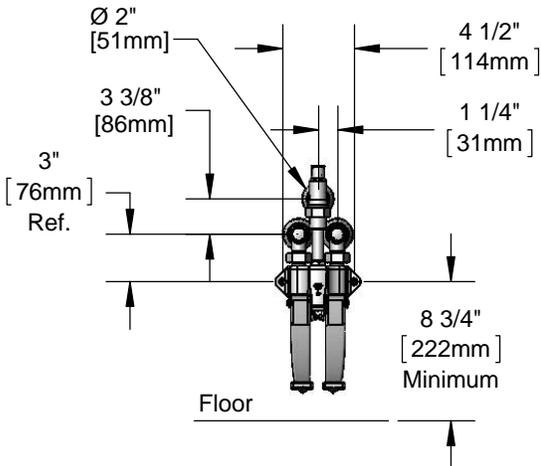

#### Features & Benefits:

- Wall mount double pedal valve
- Adjustable height hot and cold pedals
- Pedals flip up for floor cleaning
- Self-closing valves
- 1/2" NPT female loose key angle stop inlets
- 3/8" NPT female loose key angle volume control outlet
- Wall mounting screws included
- Material: Polished chrome plated brass valve & stop bodies and satin finish aluminum pedals

#### Product Compliance:

- ASME A112.18.1 / CSA B125.1
- NSF 61 - Section 9
- NSF 372 (Low Lead Content)



**Warranty:** One Year (Limited)



#### Performance Data:

- Pressure: 20 - 125 psi
- Temperature: 40 °F - 140 °F
- Flow Rate: 5.49 GPM @ 60 psi

#### Optional Cartridges

- Metering Cartridge



**T&S BRASS AND BRONZE WORKS, INC.**



• 2 Saddleback Cove • Travelers Rest, SC 29690  
 Ph 800-476-4103 • Fax 864-834-3518  
 • Simi Valley, CA • Ph 800-423-0150 • www.tsbrass.com

Date: 10/24/16