



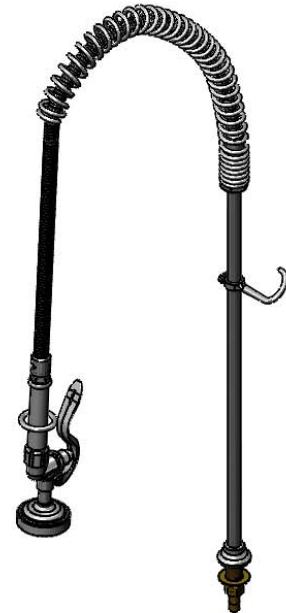

Architect/Engineering Specifications:

Single hole deck mount dummy pre-rinse with polished chrome plated brass rigid deck flange, 24" riser, 44" flexible stainless steel hose with heat resistant handle, 1.15 GPM spray valve and spray valve holder. Certified to ASME A112.18.1/CSA B125.1, NSF 61-Section 9 and NSF 372. 2019 DOE PRSV - Class II compliant.

Job Name	_____
Model Specified	_____ Quantity _____
Variations Specified	_____
Date	_____

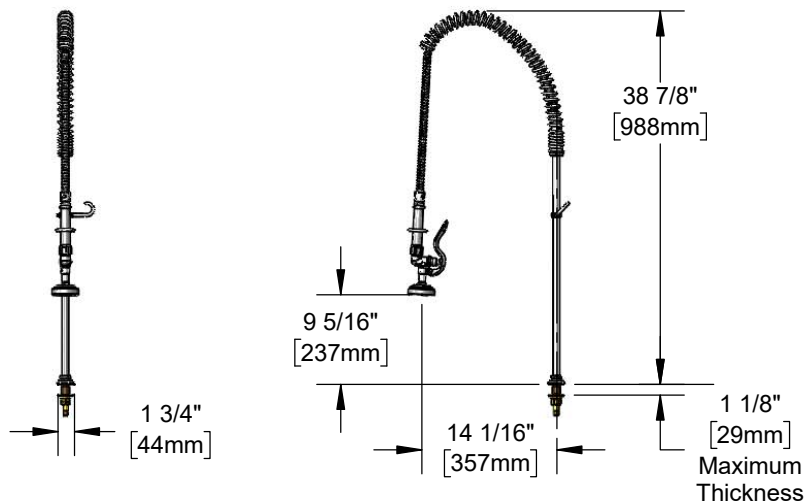

Features & Benefits:

- Single hole deck mount dummy pre-rinse w/ polished chrome plated brass body
- 24" riser
- 44" flexible stainless steel hose w/ heat resistant gray handle
- 1.15 GPM spray valve
- 1/2" NPSM shank w/ tailpiece and nut for 1/4" NPT connections
- Material: Polished chrome plated brass body, riser & spray valve and stainless steel hose

Product Compliance:

- ASME A112.18.1 / CSA B125.1
- NSF 61 - Section 9
- NSF 372 (Low Lead Content)
- 2019 DOE PRSV - Class II



Warranty: One Year (Limited)

Performance Data:

- Pressure: 20 - 125 psi
- Temperature: 40 °F - 140 °F
- Flow Rate: 1.15 GPM @ 60 psi

Optional Pre-Rinse Spray Valves

- ☐ B-0107 (1.15 GPM) (Standard)
- ☐ B-0107-C (0.65 GPM)
- ☐ B-0107-J (1.07 GPM)
- ☐ B-0108 (1.07 GPM)
- ☐ B-0108-C (0.65 GPM)

