INSTALLATION MANUAL



MODEL NUMBER

VG08012

DIMENSIONS	
Height	55 1⁄8" [1400 мм]
Width	6 ¼" [159 мм]
Depth	2 ¾" [70 мм]
Shower Head	7 ¾" [197 мм]

AVAILABLE FINISHES	
Stainless Steel	
Matte Black	

FEATURES

- · 3Divert Valve™ 3-way diverter
- · Squared rain showerhead
- Flat wall or corner installation
- Hot and cold integrated thermostatic valves
- Pre-plumbed for easy installation
- Flexible reinforced stainless steel supply hoses

PACKING LIST

- · Shower panel
- · Hand shower
- · Hand shower hose
- Supply lines
- · Head shower
- Head shower arm
- Mounting hardware

NOTE

Residue from liquid soap, shampoo, and shower foams may cause damage, so it is advised to rinse with clean water after use. If the surface is already damaged, effect of cleaning materials may cause further damage. Hard water may damage finish.

REGISTER YOUR PRODUCT

IN ORDER TO ACTIVATE YOUR WARRANTY YOU MUST REGISTER YOUR PRODUCT



VIGOINDUSTRIES.COM/REGISTER/

ACTIVATE NOW

RECOMMENDED TOOLS



Tape Measure



Pencil



Silicone Adhesive Sealant



Soft Cleaning Rag



Ear Protection



Eye Protection



Safety Gloves

WARNING



Damage caused by improper installation/ maintenance will not be covered by our guarantee and/ or warranty.



Usage over max PSI will damage internal components. (Max 60 PSI) (Min 30 PSI)




Always wear safety equipment.




MODEL#

VG08012

PACKAGE CONTENTS

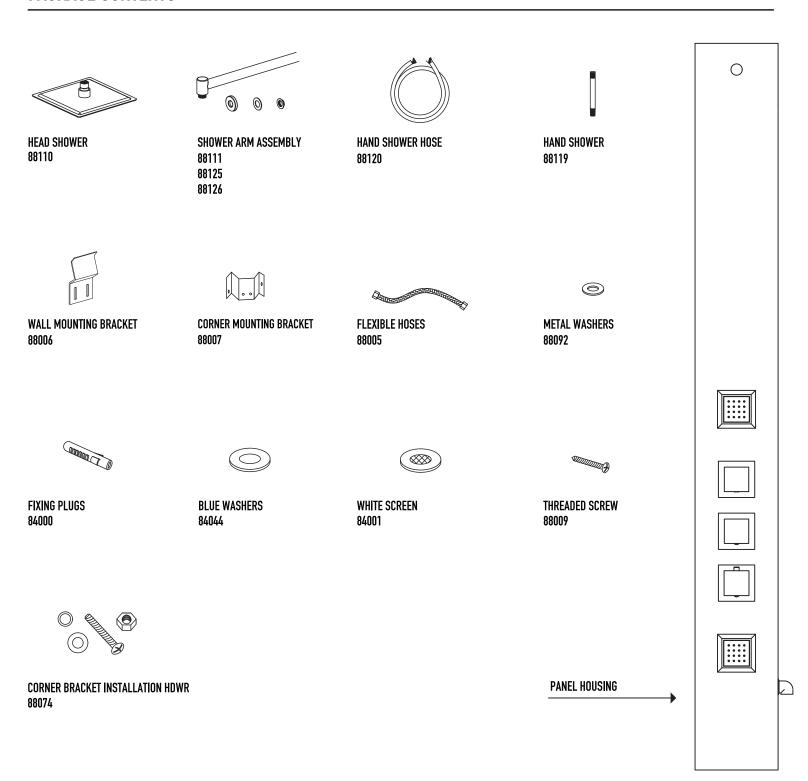



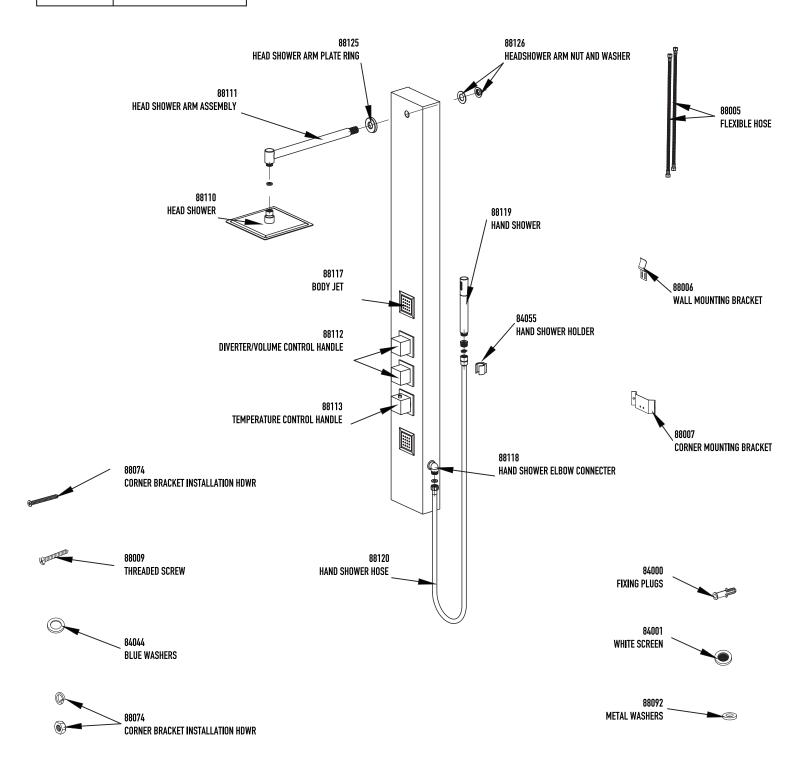

PARTS

88011B THERMOSTATIC CARTRIGE

88012 DIVERTER CARTRIGE


88116 VOLUME CONTROL CARTRIGE



1. INSTALLATION

NOTE: Installation must be performed by a qualified, licensed plumber.

1 Place head shower arm and plate in hole on top of panel.

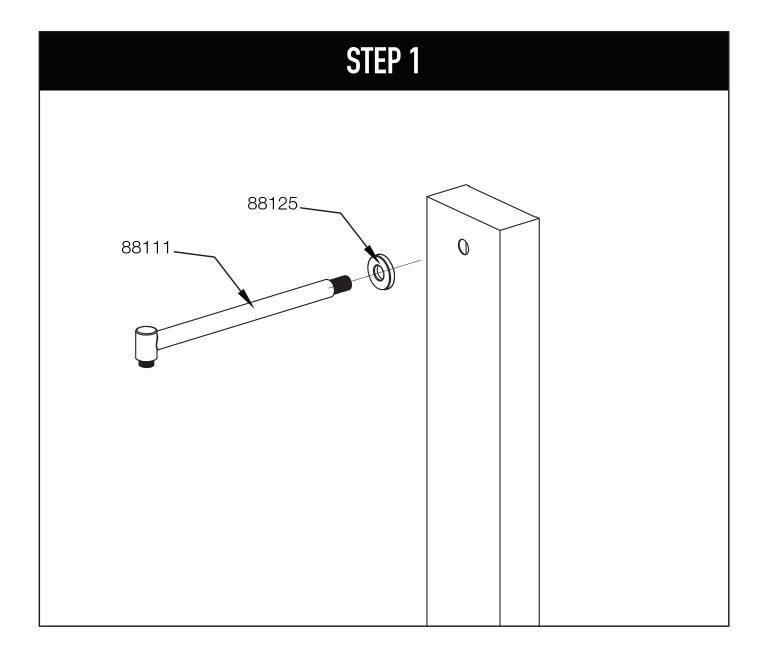


INSTALLATION MANUAL

MODEL # VG08012


1. INSTALLATION

In the back of the panel on the threaded part of the head shower arm place ruber ring then brass nut. Next place washer inside brass elbow and connect to head shower arm.

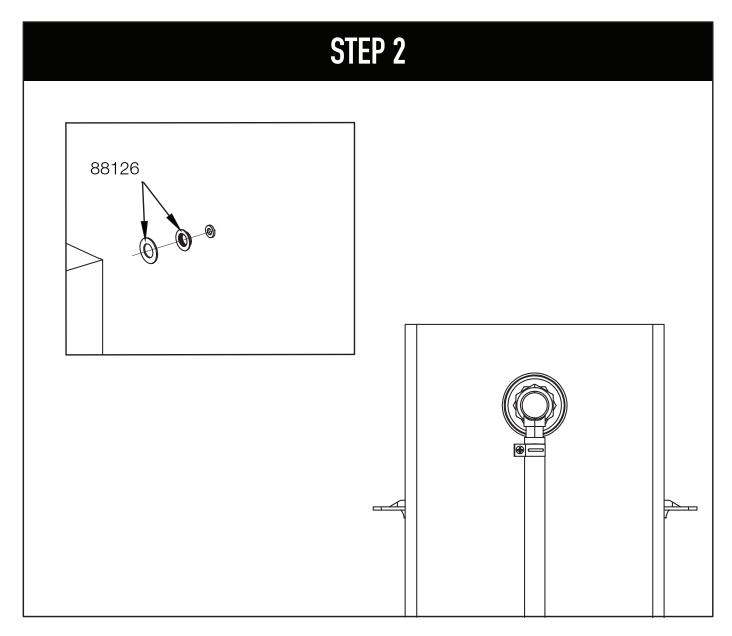

1. INSTALLATION

3 Place washer inside head shower connector. Screw head shower onto head shower arm.

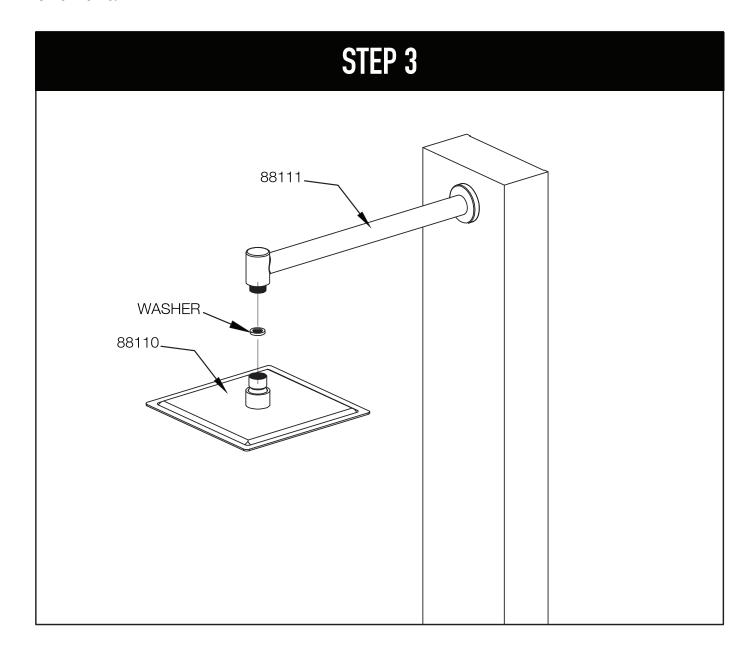




2A. WALL INSTALLATION

NOTE: Shower panel can be installed either against the wall (SECTION 2.A), or on a corner (SECTION 2.B)

1) Screw the wall mount brackets into the wall at desired height. (Refer to page 2 back view)

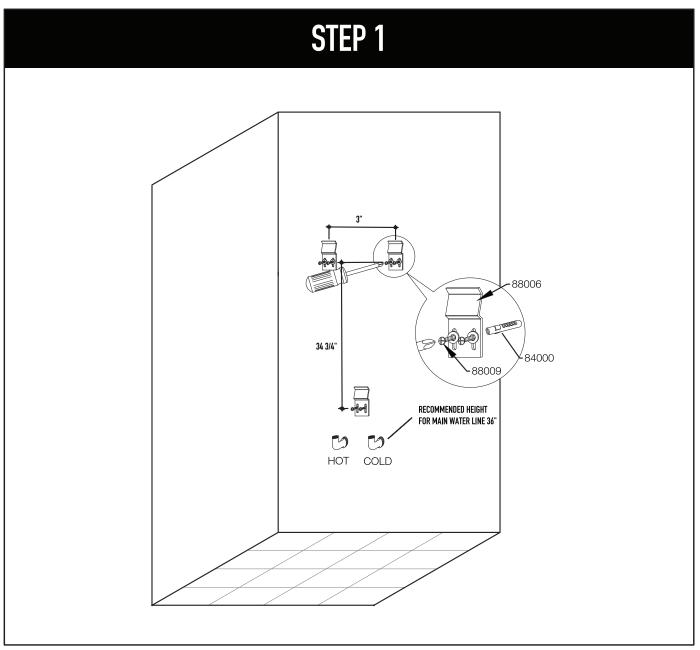




MODEL #

VG08012

2A. WALL INSTALLATION


2 Connect the flexible hoses to water supply and hang the shower panel on the mounting brackets.

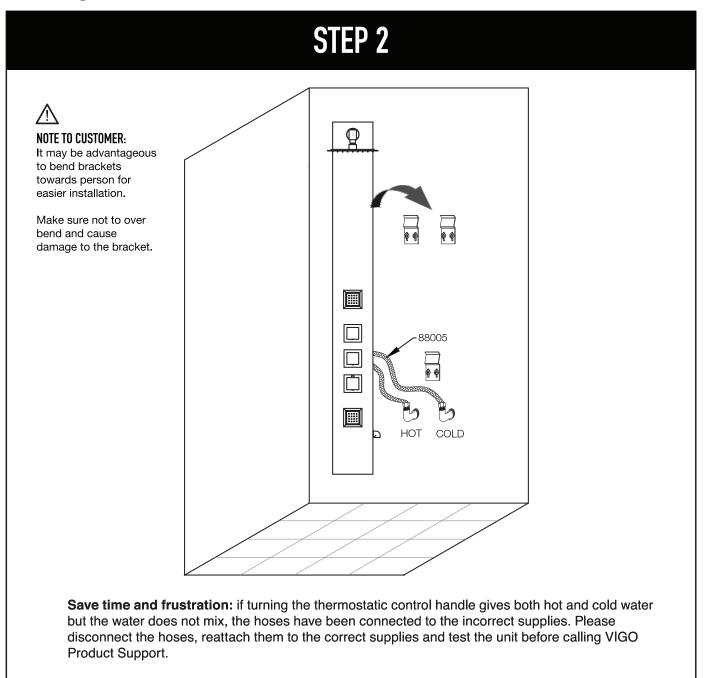



2A. WALL INSTALLATION

(3) Place clear silicone on both sides of the shower panel.

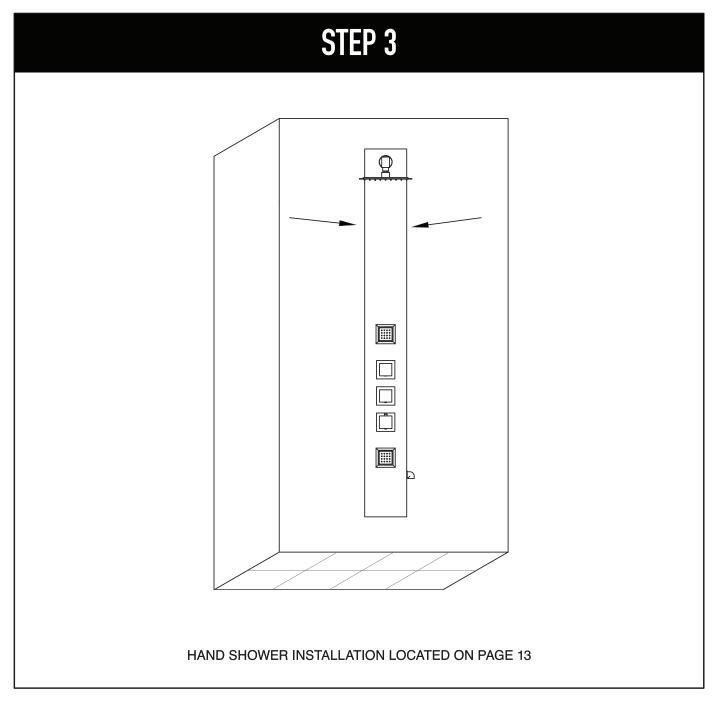


MODEL #

VG08012

2B. CORNER INSTALLATION


Screw the wall mount brackets into the corner mounting brackets. (Refer to diagram A) Then screw the corner mounting brackets into the wall. (Refer to diagram B)

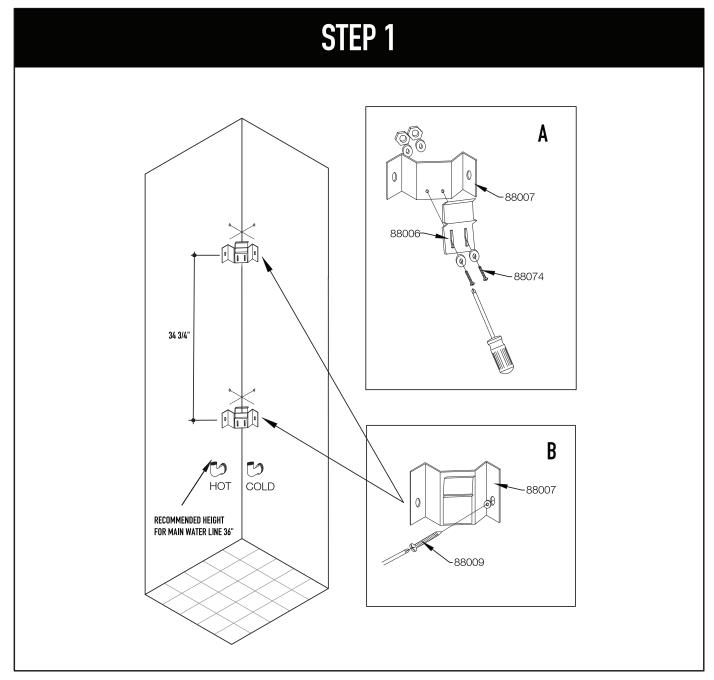




2B. CORNER INSTALLATION

2 Connect the flexible hoses to water supply and hang the shower panel on the mounting brackets.

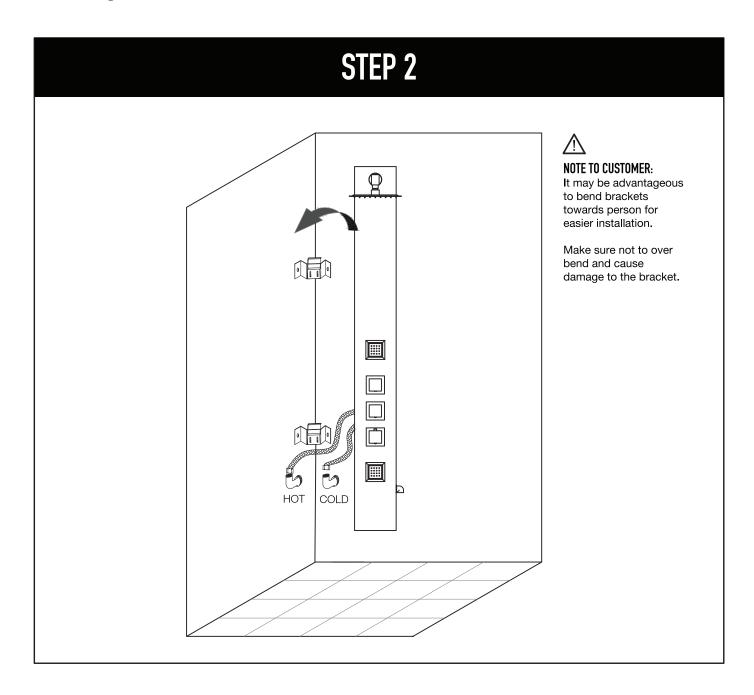

2B. CORNER INSTALLATION

(3) Place clear silicone on both sides of the shower panel.

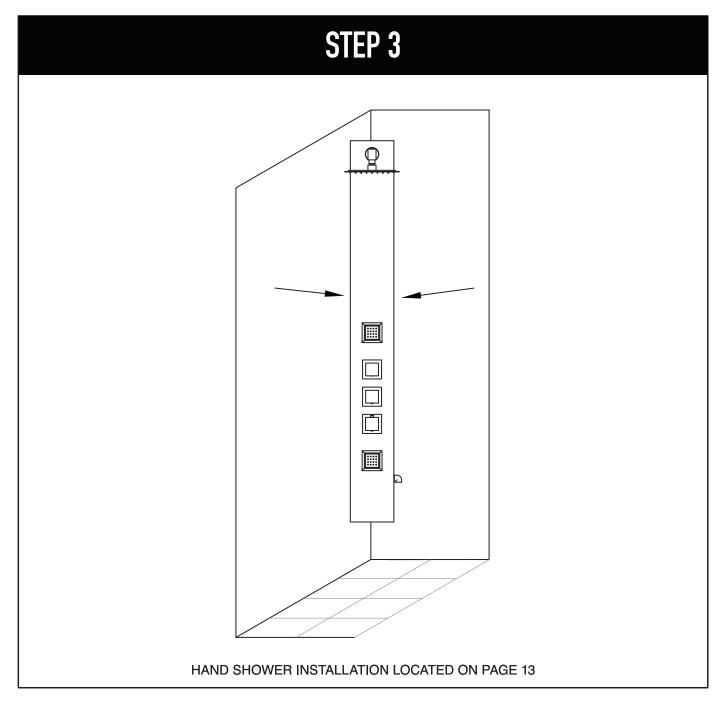


MODEL #


VG08012

3. HAND SHOWER INSTALLATION

A. Connect hand shower hose to shower panel. Make sure washer is in place.

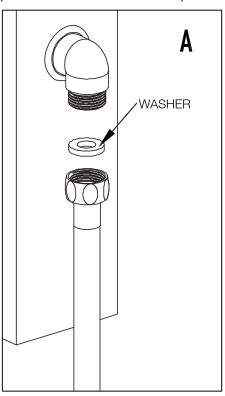

B. Connect other side of hand shower hose to hand shower. Make sure washer is in place.

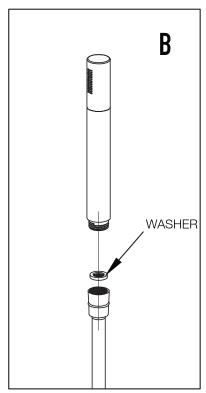

C. Install hand shower bracket to wall in desired location.

