



Buy it for looks. Buy it for life.®

**DESCRIPTION**

- Metal construction with chrome finish
- Includes showerhead, arm, flange and diverter tub spout

**OPERATION**

- Lever style handle with red/blue temperature indicator on the escutcheon
- Handle operates counterclockwise through a 270° arc with off at 6 o'clock and maximum hot at the 9 o'clock position. Shut off in clockwise direction
- Adjustable temperature limit stop to control maximum hot water temperature
- Pressure balancing mechanism maintains selected discharge temperature to ± 3°

**FLOW**

- EP suffix models are limited to 2.0 gpm (7.6 L/min) max for products manufactured prior to June 30, 2018. EP suffix models manufactured after June 30, 2018 are limited to 1.75 gpm (6.7 L/min) max.

**CARTRIDGE**

- 1222 cartridge design
- Accommodates back to back installations
- Nonmetallic, nonferrous and stainless steel material

**STANDARDS**


- Third party certified to meet ASME A112.18.1/CSA B125.1 and all applicable requirements referenced therein
- EP suffix models are third party certified to WaterSense®
- **ADA** ♿ for lever handle

**WARRANTY**

- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
- 10 year limited warranty when used in a multifamily installation
- 5 year limited warranty when used in a commercial installation

Visit [www.moen.com/support](http://www.moen.com/support) for complete details and limitations



# Specifications

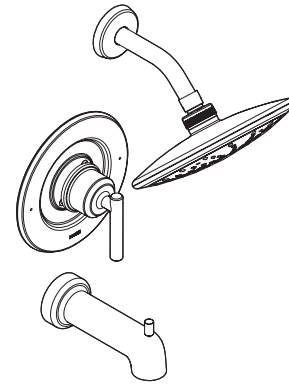

**GIBSON™**  
**Single-Handle Tub/Shower Trim Kit**

**Models:** T3002EP series - shower trim only  
T3003EP series - tub/shower trim

**Valves:** 62300 series  
2500 series

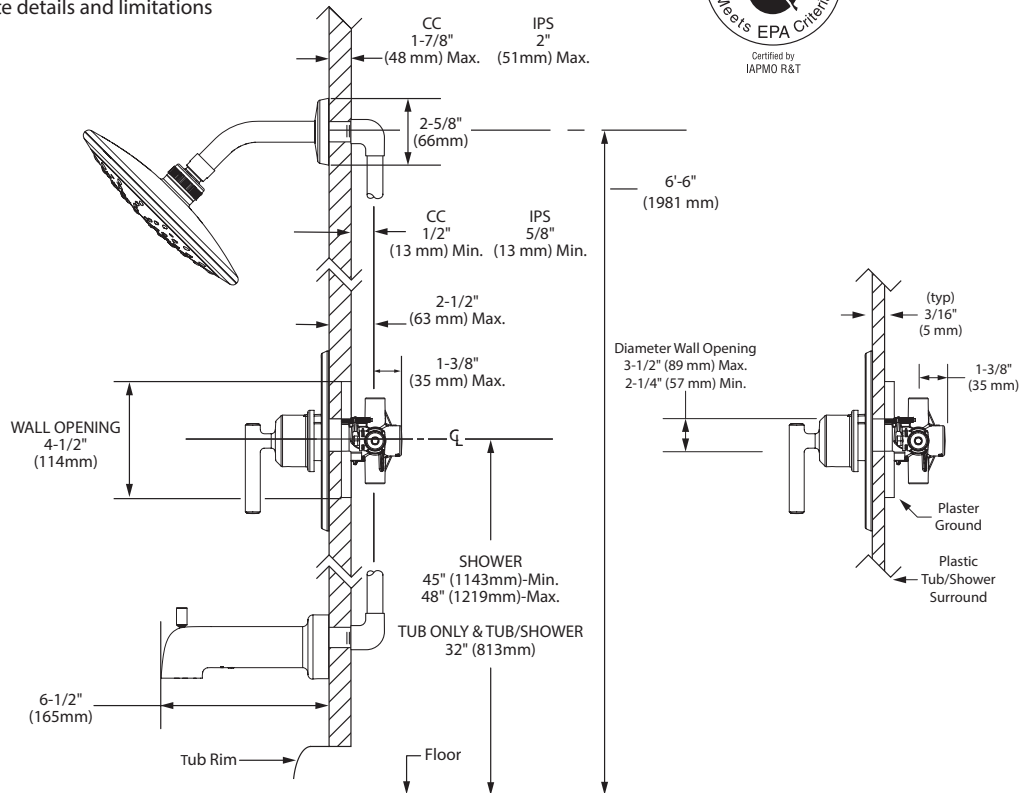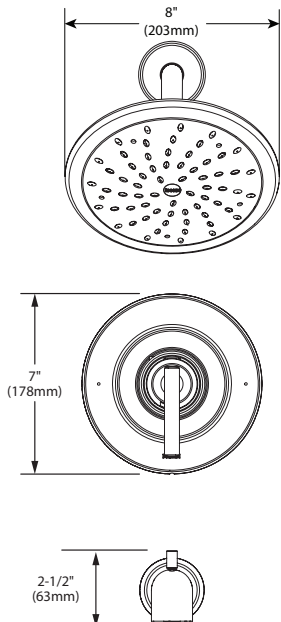

**THICK WALL APPLICATION**  
**CRITICAL DIMENSIONS**

(DO NOT SCALE)

**THIN WALL APPLICATION**