



SUBMITTAL INFORMATION

Repair Clamps - (FS2-xxxx-Length style)

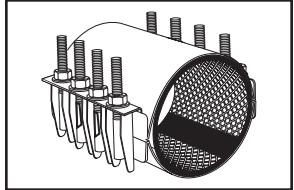


10" TO 16" TWO SECTION WIDER RANGE ALL STAINLESS STEEL REPAIR CLAMPS

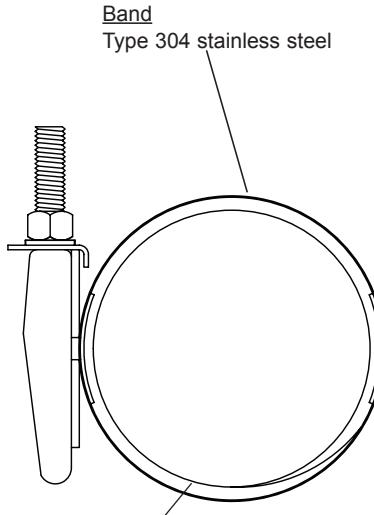

Band
Type 304 stainless steel

Gasket
SBR per ASTM D2000
Optional NBR (Buna-N) or EPDM

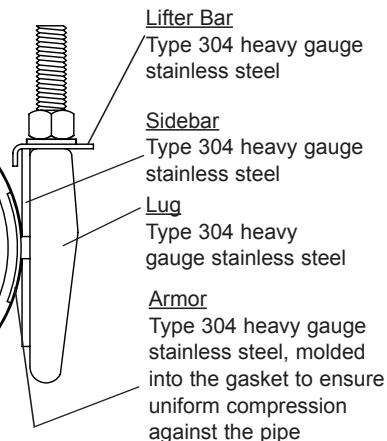

Lifter Bar
Type 304 heavy gauge stainless steel


Sidebar
Type 304 heavy gauge stainless steel

Lug
Type 304 heavy gauge stainless steel

Armor
Type 304 heavy gauge stainless steel, molded into the gasket to ensure uniform compression against the pipe


Bolts & Nuts

Type 304 stainless steel nuts and washers per ASTM A193 and A194. Nuts are coated to prevent galling.

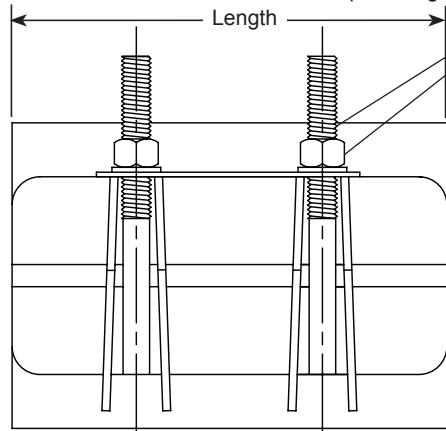

Optional Stainless Taps

Type 304 stainless steel tap TIG welded to band. Available with AWWA, or I.P. threads.



OUTLET THREAD TAP CODE

CC (AWWA) Thread		IP Thread	
THREAD	CODE NUMBER	THREAD	CODE NUMBER
3/4" CC	-CC3	3/4" IP	-IP3
1" CC	-CC4	1" IP	-IP4
1-1/4" CC	-CC5	1-1/4" IP	-IP5
1-1/2" CC	-CC6	1-1/2" IP	-IP6
2" CC	-CC7	2" IP	-IP7

NOM. PIPE SIZE	PIPE O.D. RANGE (IN.)	LENGTH AND APPROXIMATE WEIGHT (LBS.)						BOLT SIZE	BAND THICKNESS	CATALOG NUMBER	✓ SUBMITTED ITEM(S)		
		10"	12.5"	15"	20"	24"	30"						
10"	10.70 - 11.50	18	23	32	41	50	54	5/8" UNC	20 GA.	FS2-1150-Length			
	11.04 - 11.84									FS2-1184-Length			
	11.60 - 12.40									FS2-1240-Length			
12"	12.70 - 13.50	19	25	34	44	54	57			FS2-1350-Length			
	13.14 - 13.94									FS2-1394-Length			
	13.65 - 14.45									FS2-1445-Length			
14"	15.07 - 15.82	20	27	36	47	58	63			FS2-1582-Length			
	15.58 - 16.38									FS2-1638-Length			
	15.87 - 16.67									FS2-1667-Length			
16"	15.61 - 17.31	22	29	38	50	62	66			FS2-1731-Length			
	17.15 - 17.90									FS2-1790-Length			
	17.20 - 18.00									FS2-1800-Length			
	18.41 - 19.21									FS2-1921-Length			
Number of Bolts		6	8	8	12	14	18						

FEATURES

- Gasket is SBR per ASTM D2000. NBR (Buna-N) and EPDM are available.
- Optional outlet taps are available for repair of service line pull-outs. Add tap code to end of catalog number.
Example: FS2-1350-125-IP4
- All welds are fully passivated to restore the corrosion resistant characteristics of the stainless steel
- Complies with ANSI/AWWA C230 and certified to ANSI/NSF Standard 61

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
Phone: 260-563-3171 / Fax: 800-826-3487
Overseas Fax: 260-563-0167
www.fordmeterbox.com

Submitted By: