

SUBMITTAL INFORMATION





MALE IRON PIPE THREAD INLET BY GRIP JOINT FOR COPPER OR PLASTIC TUBING (CTS) OUTLET

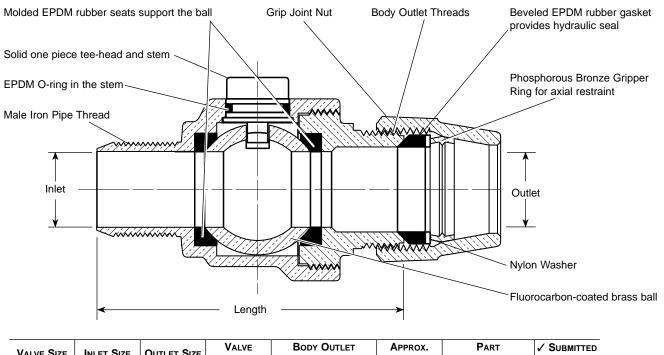

VALVE SIZE	INLET SIZE	OUTLET SIZE		BODY OUTLET THREADS	APPROX. WT. LBS		✓ SUBMITTED ITEM(S)	
3/4"	3/4"	3/4"	4-7/16"	3/4" Flare Copper	1.6	▼ FB1100-3-G		
3/4"	3/4"	1"	4-9/16"	1" Flare Copper	2.0	▼ FB1100-34-G		SLASS U
1"	1"	1"	4-9/16"	1" Flare Copper	2.5	▼ FB1100-4-G		
1"	1"	1-1/4"	4-9/16"	1-1/4" Flare Copper	3.2	▼ FB1100-45-G		E
1-1/4"	1-1/4"	1-1/4"	5-15/16"	1-1/4" Flare Copper	4.9	▼▼ FB1100-5-G		
1-1/4"	1-1/4"	1-1/2"	5-7/8"	1-1/2 Flare Copper	5.6	▼▼ FB1100-56-G		
1-1/2"	1-1/2"	1-1/2"	6-9/16"	1-1/2" Flare Copper	7.0	▼▼ FB1100-6-G		APPR
1-1/2"	1-1/2"	2"	6-9/16"	2" Flare Copper	8.4	▼▼ FB1100-67-G		
2"	2"	2"	7-7/16"	2" Flare Copper	11.0	▼▼ FB1100-7-G		

▼ UL Classified to ANSI/NSF Standard 61.

▼▼ Add "-K" to end of catalog number for item to be UL classified to ANSI/NSF Standard 61.
Note: Ford recommends using insert stiffeners with plastic pipe or tubing.

FEATURES

- All brass conforms to AWWA Standard C800 (ASTM B-62 and ASTM B-584, UNS NO C83600 - 85-5-5-5)
- Ends are integral or secured with adhesive to prevent unintentional disassembly.
- 300 PSI working pressure.

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current.

	The Ford Meter Box Company, I P.O. Box 443, Wabash, Indiana U.S.A. 46992 Phone: 260-563-3171 / Fax: 800-826-3487 Overseas Fax: 260-563-0167 http://www.fordmeterbox.com		Submitted By:
--	---	--	---------------