




# SUBMITTAL INFORMATION

## Iron Service Saddles - (F202-xxx-TAP style)

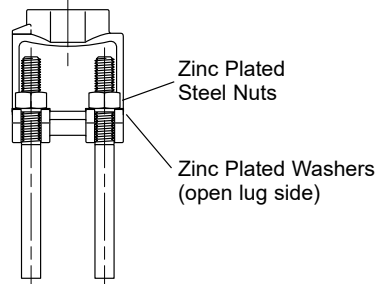

### F202 DOUBLE STRAP IRON SERVICE SADDLES

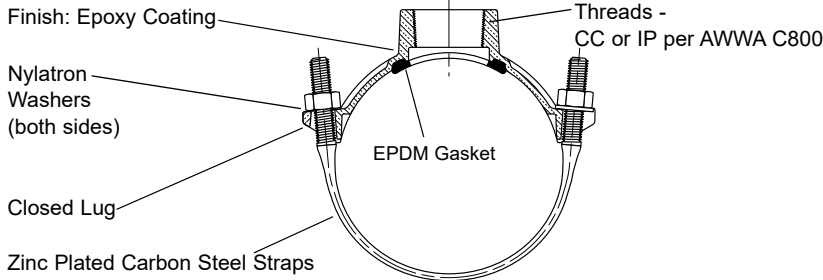

NOM. PIPE SIZE	O.D. RANGE	APPROX. WT. LBS.	CATALOG NUMBER	✓ SUBMITTED ITEM(S)
2"	2.35 - 2.50	2.8	F202-250-TAP	
2-1/2"	2.75 - 2.90	2.8	F202-290-TAP	
3"	*3.46 - 3.80	4.8	F202-380-TAP	
	*3.80 - 4.25	5.5	F202-425-TAP	
4"	**4.26 - 4.80	5.4	F202-480-TAP	
	▲ 4.74 - 5.00	5.4	F202-500-TAP	
	*4.74 - 5.26	5.4	F202-526-TAP	
	▲ 4.97 - 5.26	5.4	F202-526-TAP	
6"	5.94 - 6.69	6.5	F202-669-TAP	
	6.63 - 6.90	6.5	F202-690-TAP	
	6.84 - 7.60	6.8	F202-760-TAP	
8"	7.93 - 8.71	7.4	F202-871-TAP	
	8.63 - 9.05	7.4	F202-905-TAP	
	8.99 - 9.79	8.2	F202-979-TAP	
10"	10.00 - 10.75	10.4	F202-1075-TAP	
	10.75 - 11.10	11.5	F202-1110-TAP	
	11.10 - 12.12	11.5	F202-1212-TAP	
12"	12.00 - 12.75	12.5	F202-1275-TAP	
	12.75 - 13.20	12.5	F202-1320-TAP	
	13.20 - 14.38	12.5	F202-1438-TAP	
14"	15.30 - 16.25	16.0	F202-1625-TAP	
	16.30 - 17.25	16.5	F202-1725-TAP	
16"	17.40 - 18.40	17.0	F202-1840-TAP	
	18.50 - 19.25	17.3	F202-1925-TAP	
18"	19.50 - 20.50	20.8	F202-2050-TAP	
20"	21.20 - 22.20	21.3	F202-2220-TAP	
	22.50 - 23.50	24.0	F202-2350-TAP	
24"	23.80 - 24.80	24.5	F202-2480-TAP	
	25.60 - 26.50	31.7	F202-2650-TAP	
30"	31.74 - 32.74	42.0	F202-3274-TAP	

#### OUTLET TAP CODE

CC (AWWA) THREAD		
THREAD	CODE NUMBER	✓ SUBMITTED ITEM(S)
3/4" CC	CC3	
1" CC	CC4	
1-1/4" CC	Δ CC5	
1-1/2" CC	CC6	
2" CC	CC7	
IP THREAD		
THREAD	CODE NUMBER	✓ SUBMITTED ITEM(S)
1/2" IP	Δ IP1	
3/4" IP	IP3	
1" IP	IP4	
1-1/4" IP	Δ IP5	
1-1/2" IP	IP6	
2" IP	IP7	
2-1/2" IP	IP8	

Δ Contact factory for availability

\* Saddles for this pipe range are not available with 2" CC (CC7) or 2-1/2" IP (IP8) threads.

\*\* These saddles with 2" CC (CC7) or 2-1/2" IP (IP8) taps only fit 4.80" O.D. pipe.

Example: F202-480-CC7 fits 4.80 pipe O.D. only

▲ This saddle is only available with 2" CC (CC7) or 2-1/2" IP (IP8) taps

### FEATURES

- Body made of high strength ductile iron per ASTM A536
- Straps are 5/8" AISI C1010 steel, zinc plated with trivalent seal. Each strap has a 5/8" flat bearing surface. For saddles 3" or smaller, straps are 1/2"
- Gasket is EPDM rubber, ASTM D2000
- Finish on saddle body is fusion-bonded epoxy coating
- UL Classified to ANSI/NSF Standard 61

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current.



**The Ford Meter Box Company, Inc.**

P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443

Phone: 260-563-3171 / Fax: 800-826-3487

Overseas Fax: 260-563-0167

www.fordmeterbox.com

01/22/18

Submitted By: