




TYPE A

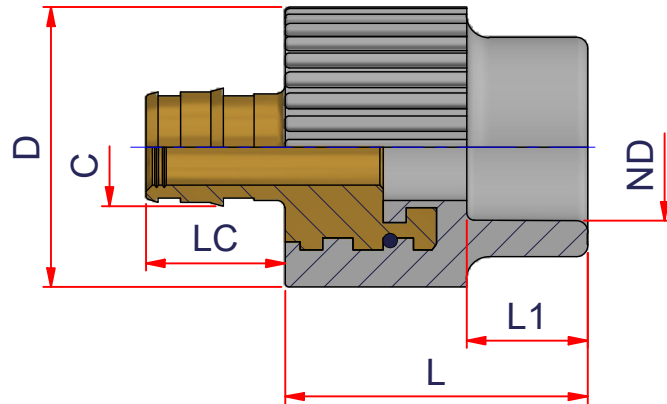


TYPE B

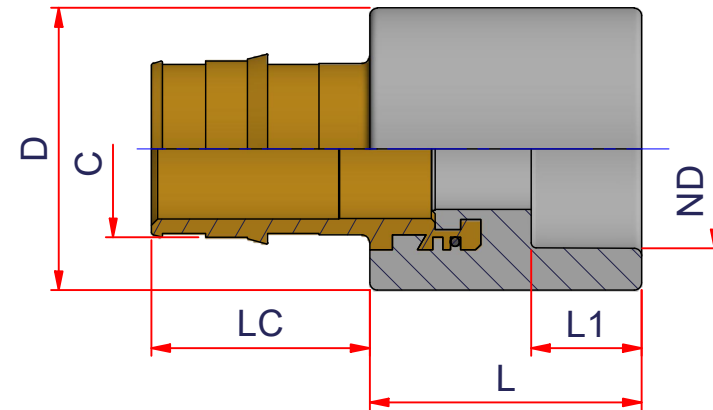

TYPE A



TYPE B

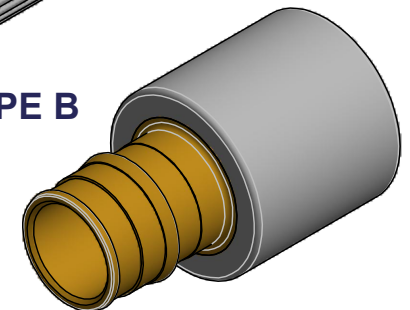

CODE	ND	C	LC	D	L1	L
27NPR1220 (A)	1/2" => 20 mm	1/2"	0.73	1.46	0.63	1.57
27NPR5825 (A)	3/4" => 25 mm	5/8"	0.87	1.46	0.67	1.61
27NPR1225 (A)	3/4" => 25 mm	1/2"	0.73	1.46	0.67	1.61
27NPR3425 (A)	3/4" => 25 mm	3/4"	0.96	1.65	0.67	1.81
27NPR132 (A)	1" => 32 mm	1"	1.20	2.13	0.79	2.05
27NPR11432 (A)	1" => 32 mm	1"1/4	1.44	2.13	0.79	2.05
27NPR11240 (B)	1"1/4 => 40 mm	1"1/2	1.70	2.20	0.87	2.13
27NPR250 (B)	1"1/2 => 50 mm	2"	2.13	2.95	0.98	2.21

NIRON



ITEM: **NPR**

DESC: RACCORDO CON ATTACCO PEX

C:\Vault_Temp\Disegni\Schede Tecniche\Niron Grey inches\Socket Fusion Fittings\NI10287.dwg



DRAWING No:
NI10287

SHEET OF
1 1

REV.
-4

www.nupiamericas.com - info@nupiamericas.com

All dimensions have to be considered in inches with 5% tolerance if not otherwise mentioned excluding values as per standard ASTM F2389