



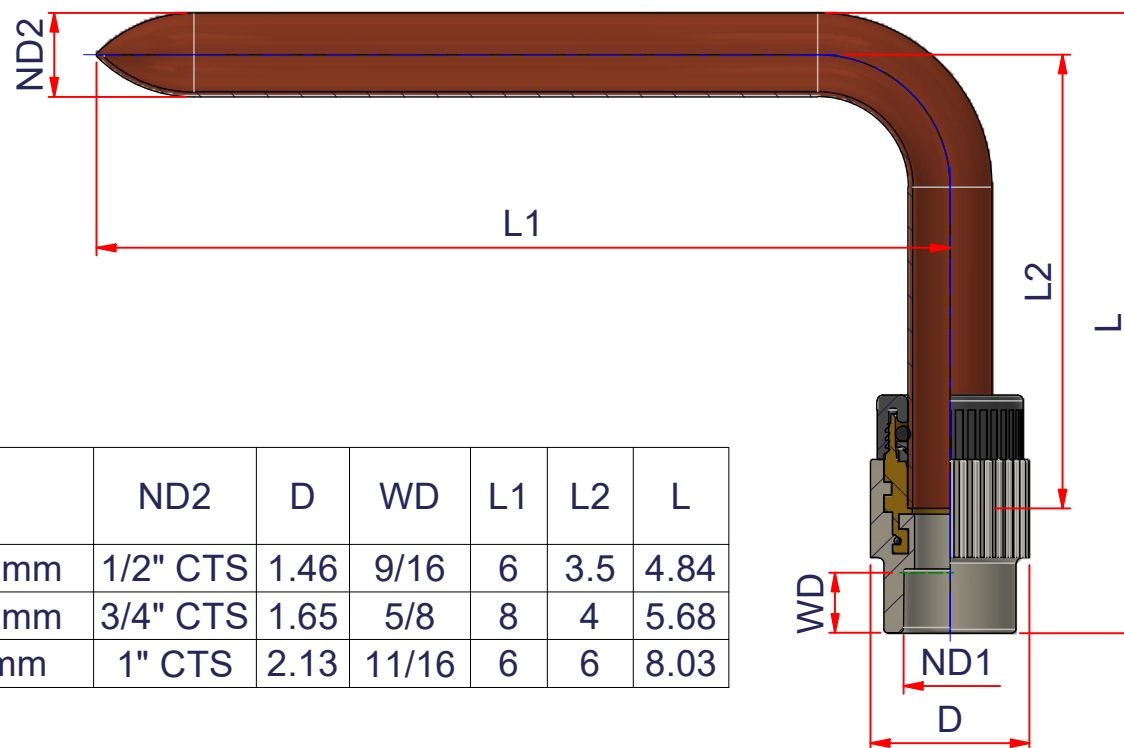

NOTE: WD = welding depth / insertion depth

CODE	Weight lbs/pc	Volume ft ³ /pc	ND1	ND2	D	WD	L1	L2	L
27NCUTC12C20L	0.107	0.0275	1/2" => 20 mm	1/2" CTS	1.46	9/16	6	3.5	4.84
27NCUTC34C25L	0.154	0.0479	3/4" => 25 mm	3/4" CTS	1.65	5/8	8	4	5.68
27NCUTC1C32L	0.324	0.0699	1" => 32 mm	1" CTS	2.13	11/16	6	6	8.03

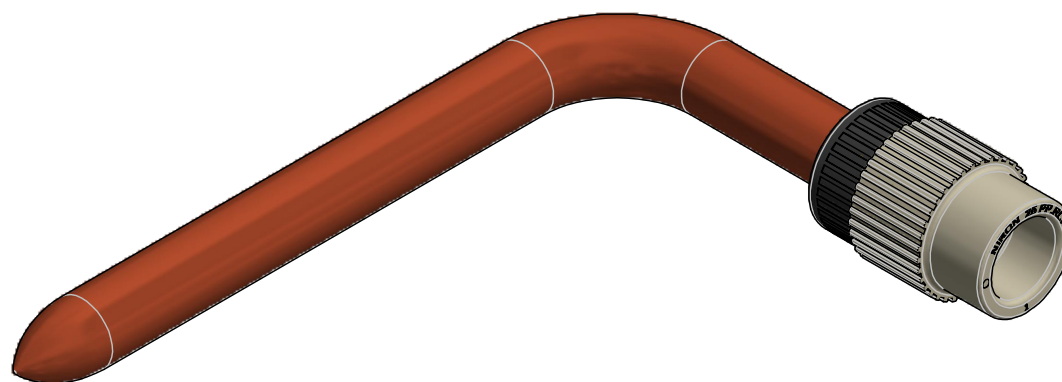

NIRON



ITEM: NCUTC_L

C:\Vault_Templ\Disegni\Schede Tecniche\Niron Grey inches\Socket Fusion Fittings\NI10302.dwg

DESC: COPPER, CURVED TRANSITION
FITTING WITH SOCKET FUSION ENDS




DRAWING No:
NI10302

SHEET OF
1 2 -3


www.nupiamericas.com - info@nupiamericas.com

All dimensions have to be considered in inches with 5% tolerance if not otherwise mentioned excluding values as per standard ASTM F2389

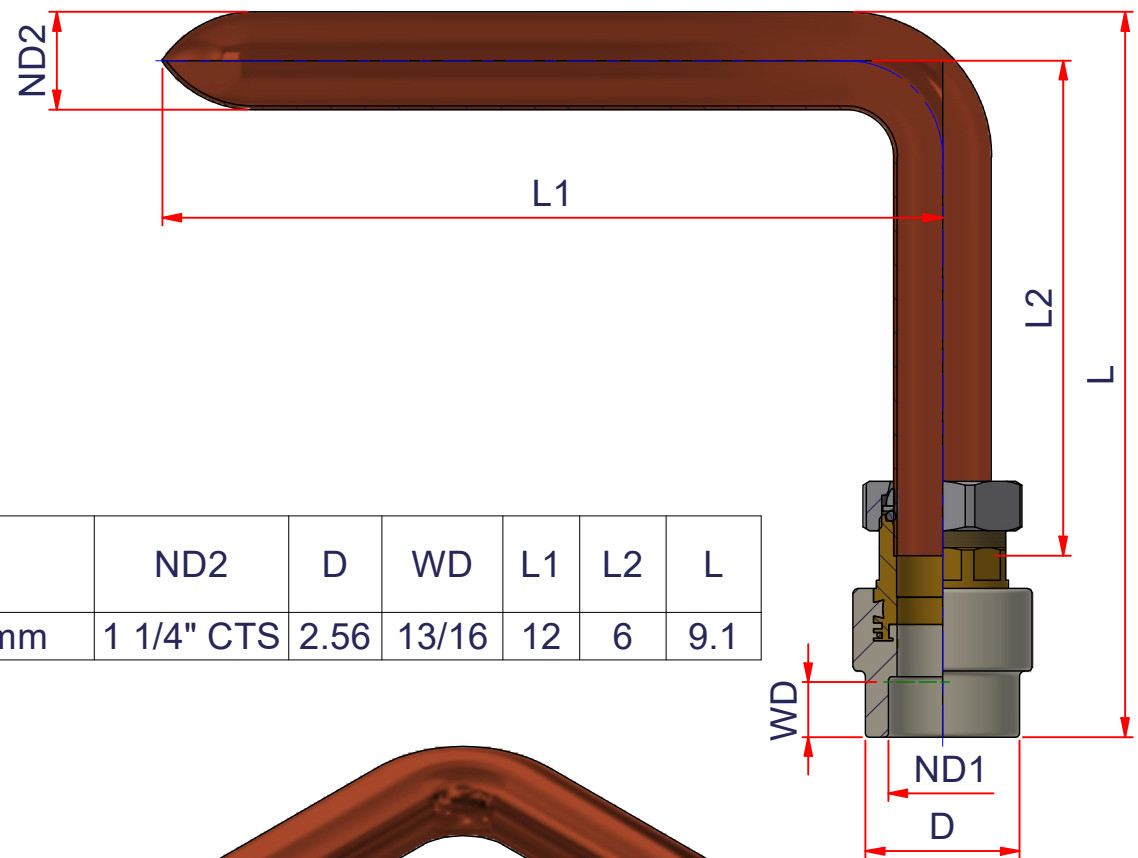

NOTE: WD = welding depth / insertion depth

CODE	Weight lbs/pc	Volume ft ³ /pc	ND1	ND2	D	WD	L1	L2	L
27NCUTC114C40L	0.543	0.179	1" => 32 mm	1 1/4" CTS	2.56	13/16	12	6	9.1

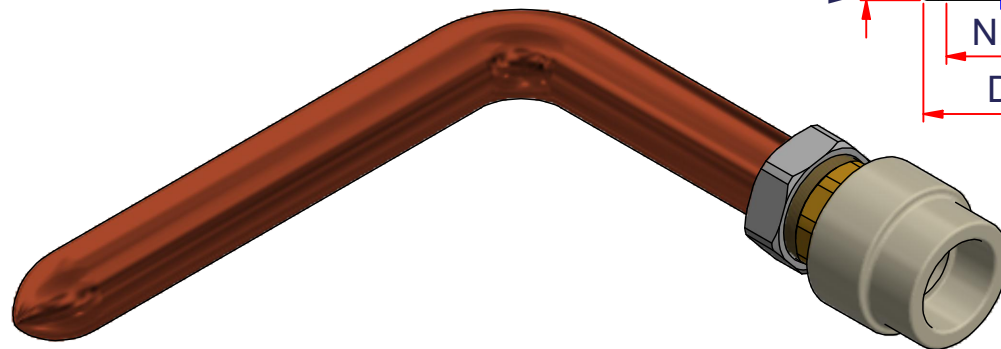

NIRON



ITEM: **NCUTC_L**

C:\Vault_Templ\Disegn\ISchede Tecniche\Niron Grey inches\Socket Fusion Fittings\NI10302.dwg

DESC: COPPER, CURVED TRANSITION
FITTING WITH SOCKET FUSION ENDS



DRAWING No:
NI10302

SHEET OF
2 2

REV.
-3

www.nupiamericas.com - info@nupiamericas.com

All dimensions have to be considered in inches with 5% tolerance if not otherwise mentioned excluding values as per standard ASTM F2389