

**SUBMITTAL DATA SHEET**

NI_G_IN_00126.docx Rev. -5

Sheet 1 of 2

NIRON CLIMA SOCKET FUSION FITTING STUB FLANGE



ITEM: 27NCOSA_
SIZE RANGE: 1" (32 mm) ÷ 4" (125 mm)
SDR: 11
FUSION RANGE: For Socket Fusion – SDR11 and up
MATERIAL: PP-RCT (Borealis RA 7050 beta crystalline random copolymer PP)
COLOR: Steel Grey

INSTALLATION INSTRUCTIONS:

Butt fusion - Butt fitting in accordance with DVS 2207, ASTM D2657 and NUPI Niron Installation Manual


Electrofusion - Electrofusion in accordance with ASTM D2657 and NUPI Niron Installation Manual

LISTINGS:

NSF PW; ANSI/NSF 14; ANSI/NSF 61; ANSI/NSF 51; UPC; IPC; IAPMO; ICC-ES; CAN/UCL S102; CAN/UCL S115*

STANDARDS:


ANSI/NSF 14; ANSI/NSF 61; ASTM F2389; ASTM F2023; CSA B137,11; ASTM E-84***; CAN/ULC S102***; NSF 51; ISO 15874

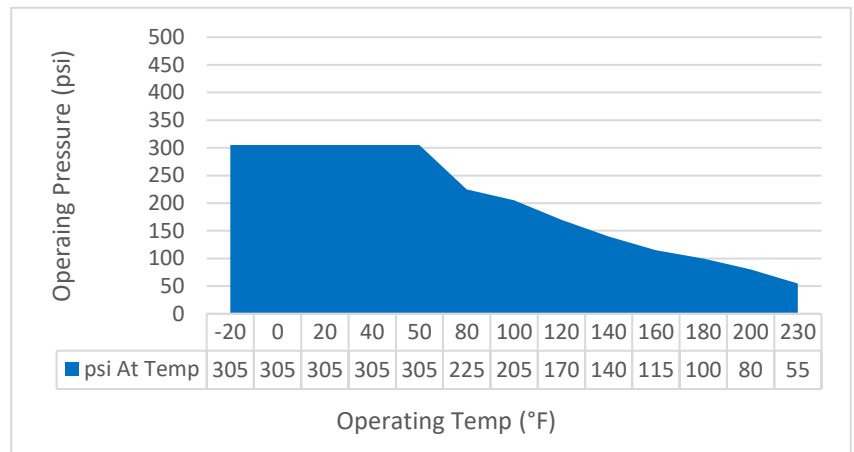MAXIMUM OPERATING PRESSURE:

For code or standard question pertaining to NIRON CLIMA Pipe and Fittings, contact Nupi Americas.

RODUCT INFORMATION AND APPLICATION USE:

Niron Butt Fusion Fittings is designed to be joined by means of heat element butt fusion or electrofusion in accordance with the above listed installation instructions. Fittings are manufactured with extended plain ends on each outlet which is a reinforced area in the center of the fitting for strength. The dimensions of the fittings are in accordance with the requirements of ASTM F2389. The fittings are designed to match the wall thickness and pressure ratings of the matching Niron pipe of the same SDR. Fittings are unitary and injection molded and are solid grey in color.

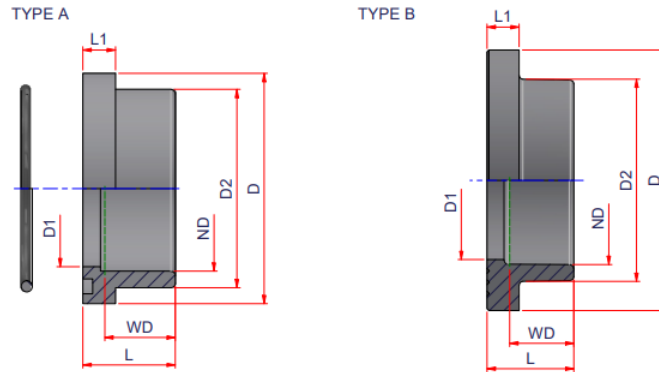

CODE	TYPE	Weight lbs/pc	Volume ft ³ /pc	ND	D1	D2	D	L1	WD	L
27NCOSA32	A	0.044	0.0024	1" => 32 mm	1.11	1.61	2.01	0.39	11/16	1.02
27NCOSA40	A	0.077	0.0043	1 1/4" => 40 mm	1.42	1.94	2.52	0.52	13/16	1.18
27NCOSA50	A	0.103	0.0064	1 1/2" => 50 mm	1.79	2.4	2.87	0.52	15/16	1.34
27NCOSA63	B	0.271	0.0143	2" => 63 mm	2.22	3	3.97	0.62	1 1/16	1.57
27NCOSA75	B	0.448	0.0226	2 1/2" => 75 mm	2.52	3.54	4.72	0.74	1 3/16	1.75
27NCOSA90	B	0.441	0.0299	3" => 90 mm	3.37	4.17	5.20	0.70	1 5/16	1.91
27NCOSA110	B	0.807	0.0497	3 1/2" => 110 mm	4.02	5.16	6.22	0.98	1 7/16	2.22
27NCOSA125	B	0.961	0.0648	4" => 125 mm	4.57	5.75	6.69	1.02	1 9/16	2.5

MANUFACTURER'S WARRANTY:

Thirty (30) Years from the date of sale upon successful completion of pressure test of the piping system (refer to published warranty for complete details).

NOTE:

* For unexposed service only with CAN/UCL S115 listed 1" thick fiberglass insulation.

** More information can be found on NIRON TECHNICAL CATALOGUE

*** For Niron pipe and fittings to meet E-84 and/or CAN/ULC S102.2 for installation in a plenum application, it must be covered with a minimum of 1" or greater E-84 fiberglass insulation

**** Technical Data may undergo dimensional changes, check revision at the top

***** It is the designer's/installer's responsibility to verify disc clearance before installation/purchasing the product by dry fitting the stub flange with the butterfly valve. Consult the Niron Installation Manual for further details concerning the installation of butterfly valves.