




NOTE: WD = welding depth / insertion depth

CODE	TYPE	Weight lbs/pc	Volume ft ³ /pc	ND1	ND2	ND3	D1	D2	D3	D4	D	WD1	WD2	WD3	L	H1	H
27NTR252020	B	0.079	0.00364	3/4" => 25 mm	1/2" => 20 mm	1/2" => 20 mm	0.83	0.65	0.65	1.14	1.38	5/8	9/16	9/16	2.44	1.18	1.87
27NTR252025	A	0.082	0.00364	3/4" => 25 mm	3/4" => 25 mm	1/2" => 20 mm	0.83	0.83	0.65	1.14	1.38	5/8	5/8	9/16	2.44	1.18	1.87
27NTR252520	C	0.073	0.00378	3/4" => 25 mm	1/2" => 20 mm	3/4" => 25 mm	0.83	0.65	0.83	1.38	1.38	5/8	9/16	5/8	2.48	1.22	1.91
27NTR253225	A	0.207	0.00733	3/4" => 25 mm	3/4" => 25 mm	1" => 32 mm	0.83	0.83	0.83	1.81	1.81	5/8	5/8	11/16	2.91	1.5	2.4
27NTR322020	D	0.134	0.00707	1" => 32 mm	1/2" => 20 mm	1/2" => 20 mm	1.18	0.65	0.65	1.14	1.81	11/16	9/16	9/16	2.95	1.38	2.28
27NTR322025	D	0.134	0.00707	1" => 32 mm	3/4" => 25 mm	1/2" => 20 mm	1.18	0.83	0.65	1.14	1.81	11/16	5/8	9/16	2.95	1.38	2.28
27NTR322032	A	0.157	0.00707	1" => 32 mm	1" => 32 mm	1/2" => 20 mm	1.18	1.18	0.65	1.14	1.81	11/16	11/16	9/16	2.95	1.38	2.28
27NTR322525	B	0.17	0.00707	1" => 32 mm	3/4" => 25 mm	3/4" => 25 mm	1.18	0.83	0.83	1.38	1.81	11/16	5/8	5/8	2.95	1.38	2.28
27NTR322532	A	0.141	0.00707	1" => 32 mm	1" => 32 mm	3/4" => 25 mm	1.18	1.18	0.83	1.38	1.81	11/16	11/16	5/8	2.95	1.38	2.28
27NTR323225	C	0.143	0.00743	1" => 32 mm	3/4" => 25 mm	1" => 32 mm	1.18	0.83	1.18	1.81	1.81	11/16	5/8	11/16	2.95	1.5	2.4
27NTR402040	A	0.165	0.00907	1 1/4" => 40 mm	1 1/4" => 40 mm	1/2" => 20 mm	1.42	1.42	0.65	1.3	2.09	13/16	13/16	9/16	2.91	1.54	2.58
27NTR402540	A	0.159	0.00907	1 1/4" => 40 mm	1 1/4" => 40 mm	3/4" => 25 mm	1.42	1.42	0.83	1.3	2.09	13/16	13/16	5/8	2.91	1.54	2.58
27NTR403240	A	0.256	0.01161	1 1/4" => 40 mm	1 1/4" => 40 mm	1" => 32 mm	1.38	1.38	1.18	2.13	2.13	13/16	13/16	11/16	3.43	1.69	2.76
27NTR502050	A	0.304	0.01635	1 1/2" => 50 mm	1 1/2" => 50 mm	1/2" => 20 mm	1.81	1.81	0.71	1.69	2.62	15/16	15/16	9/16	3.43	1.86	3.15
27NTR502550	A	0.295	0.01645	1 1/2" => 50 mm	1 1/2" => 50 mm	3/4" => 25 mm	1.81	1.81	0.87	1.69	2.62	15/16	15/16	5/8	3.43	1.86	3.17
27NTR503250	A	0.278	0.01645	1 1/2" => 50 mm	1 1/2" => 50 mm	1" => 32 mm	1.81	1.81	1.16	1.69	2.62	15/16	15/16	11/16	3.43	1.86	3.17
27NTR504050	A	0.428	0.01973	1 1/2" => 50 mm	1 1/2" => 50 mm	1 1/4" => 40 mm	1.69	1.69	1.42	2.6	2.6	15/16	15/16	13/16	4.02	1.97	3.27

NIRON

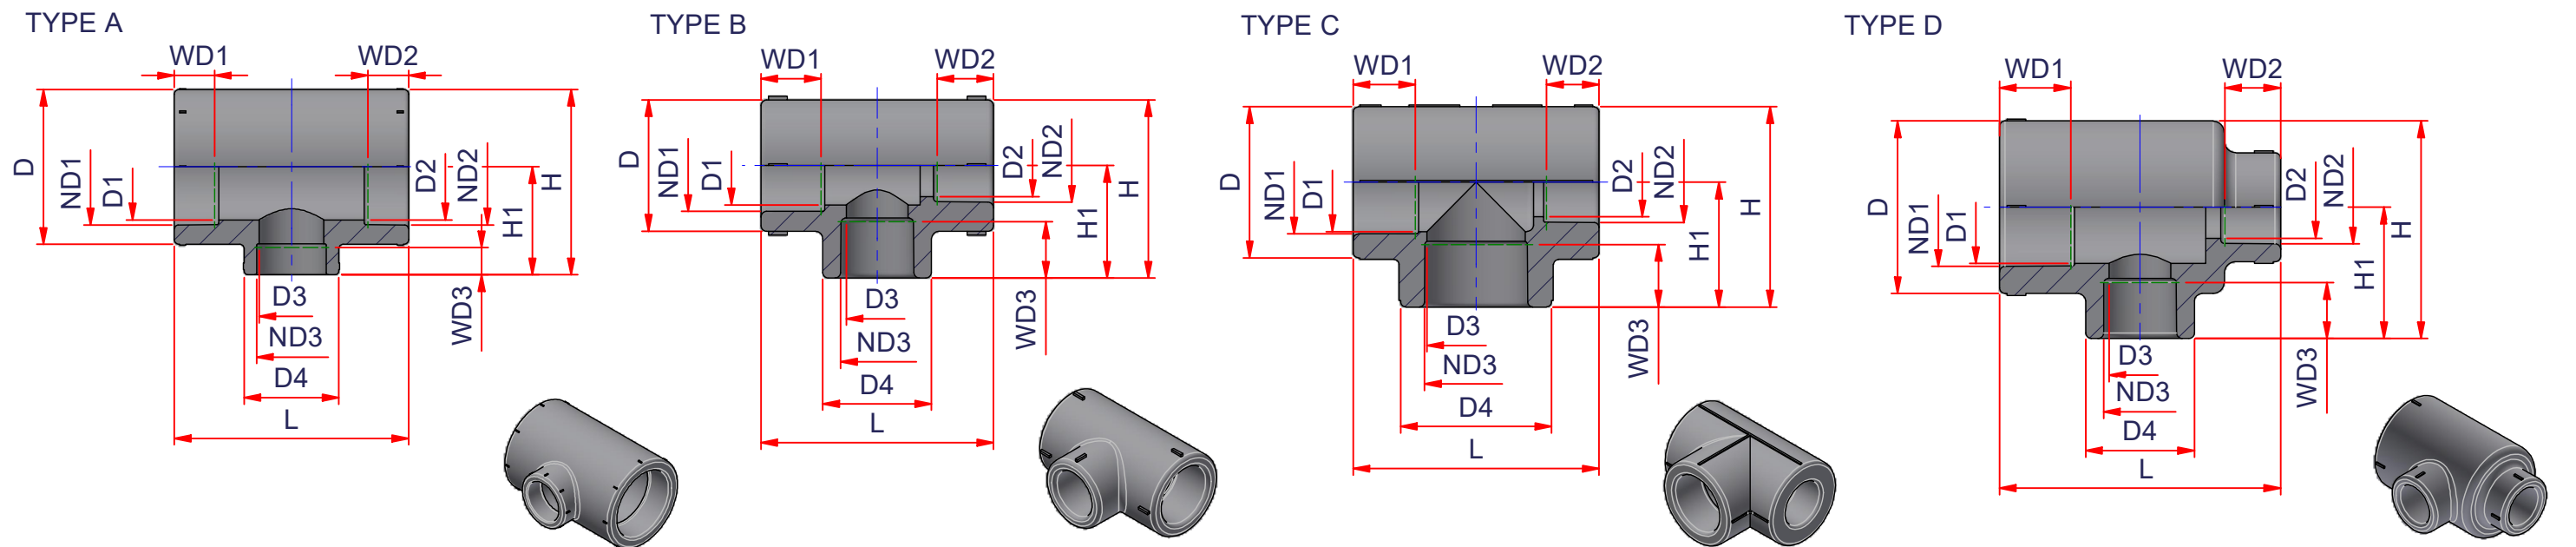

ITEM:

NTR

C:\Vault_Temp\Disegni\Schede Tecniche\Niron Grey inches\Socket Fusion Fittings\NI10139.dwg

DESC:

REDUCED TEE - SOCKET FUSION




DRAWING No:

NI10139

SHEET OF REV.

1 2 -11

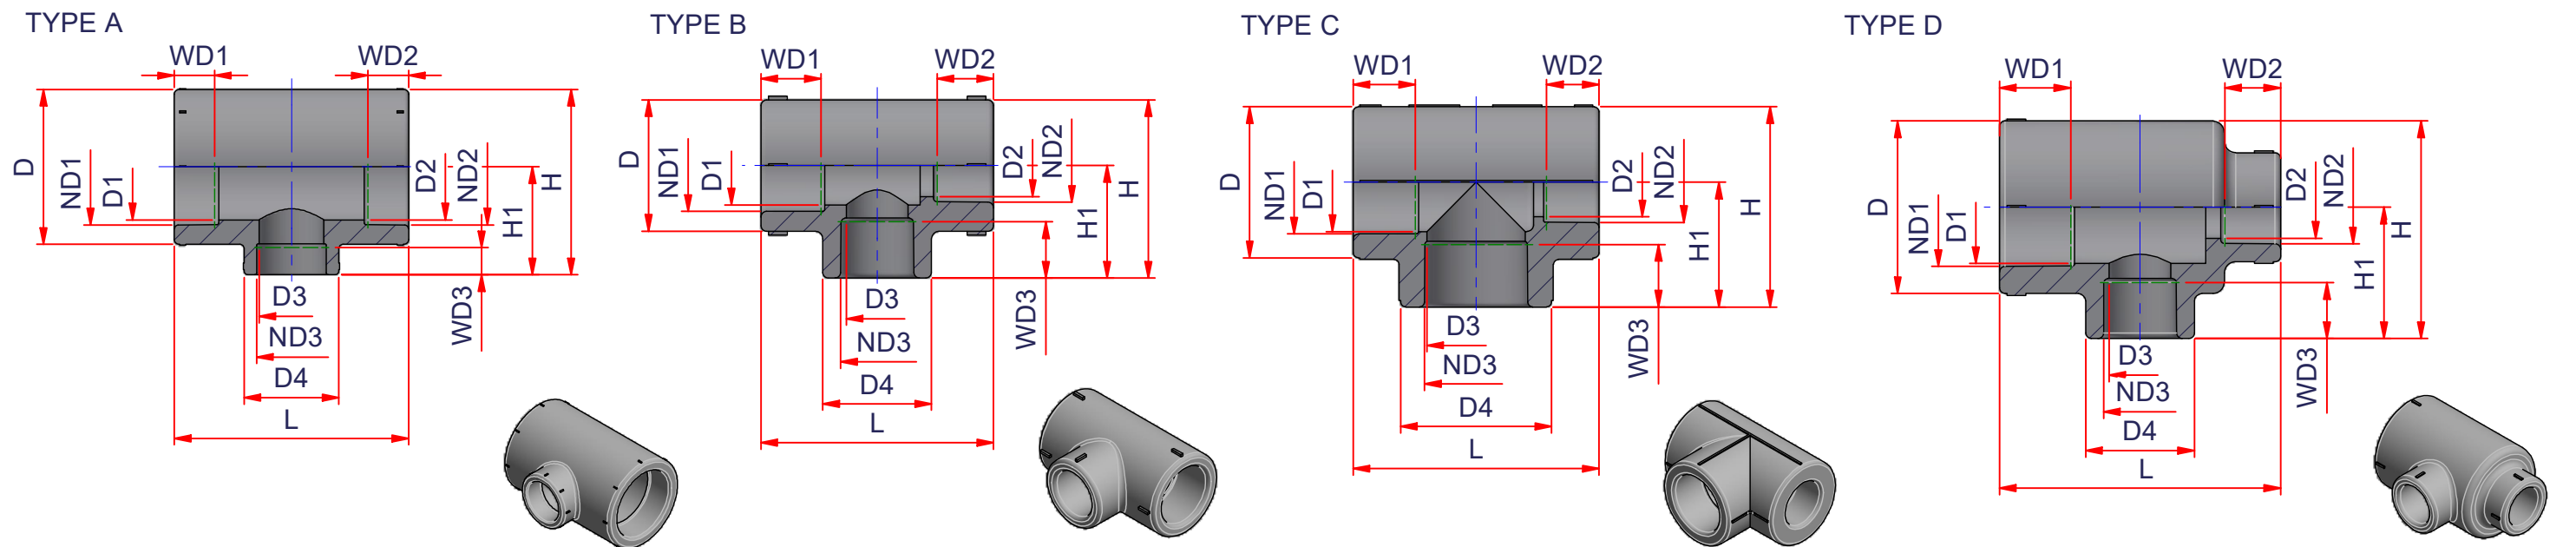

NOTE: WD = welding depth / insertion depth

CODE	TYPE	Weight lbs/pc	Volume ft ³ /pc	ND1	ND2	ND3	D1	D2	D3	D4	D	WD1	WD2	WD3	L	H1	H
27NTR632063	A	0.778	0.02909	2" => 63 mm	2" => 63 mm	1/2" => 20 mm	1.97	1.97	0.59	1.36	3.35	1 1/16	1 1/16	9/16	4.02	2.07	3.74
27NTR632563	A	0.54	0.02855	2" => 63 mm	2" => 63 mm	3/4" => 25 mm	2.36	2.36	0.83	2.09	3.27	1 1/16	1 1/16	5/8	4.02	2.13	3.76
27NTR633263	A	0.522	0.02855	2" => 63 mm	2" => 63 mm	1" => 32 mm	2.36	2.36	1.18	2.09	3.27	1 1/16	1 1/16	11/16	4.02	2.13	3.76
27NTR634063	A	0.498	0.02855	2" => 63 mm	2" => 63 mm	1 1/4" => 40 mm	2.36	2.36	1.42	2.09	3.27	1 1/16	1 1/16	13/16	4.02	2.13	3.76
27NTR635063	A	0.758	0.03826	2" => 63 mm	2" => 63 mm	1 1/2" => 50 mm	2.2	2.2	1.81	2.64	3.31	1 1/16	1 1/16	15/16	4.88	2.44	4.09
27NTR752075	A	-	0.0565	2 1/2" => 75 mm	2 1/2" => 75 mm	1/2" => 20 mm	2.36	2.36	0.59	1.36	3.98	1 3/16	1 3/16	9/16	5.75	2.28	4.27
27NTR752575	A	-	0.0565	2 1/2" => 75 mm	2 1/2" => 75 mm	3/4" => 25 mm	2.36	2.36	0.75	1.36	3.98	1 3/16	1 3/16	5/8	5.75	2.28	4.27
27NTR753275	A	1.228	0.06275	2 1/2" => 75 mm	2 1/2" => 75 mm	1" => 32 mm	2.6	2.6	1.18	1.81	3.98	1 3/16	1 3/16	11/16	5.75	2.76	4.74
27NTR754075	A	1.23	0.06275	2 1/2" => 75 mm	2 1/2" => 75 mm	1 1/4" => 40 mm	2.6	2.6	1.46	2.2	3.98	1 3/16	1 3/16	13/16	5.75	2.76	4.74
27NTR755075	A	1.197	0.06431	2 1/2" => 75 mm	2 1/2" => 75 mm	1 1/2" => 50 mm	2.6	2.6	1.81	2.76	3.98	1 3/16	1 3/16	15/16	5.75	2.87	4.86
27NTR756375	A	1.219	0.06431	2 1/2" => 75 mm	2 1/2" => 75 mm	2" => 63 mm	2.6	2.6	2.32	3.39	3.98	1 3/16	1 3/16	1 1/16	5.75	2.87	4.86
27NTR905090	A	1.797	0.08137	3" => 90 mm	3" => 90 mm	1 1/2" => 50 mm	3.31	3.31	1.81	2.76	4.72	1 5/16	1 5/16	15/16	6.3	2.91	4.72
27NTR906390	A	1.872	0.10943	3" => 90 mm	3" => 90 mm	2" => 63 mm	3.31	2.32	2.32	3.39	4.88	1 5/16	1 5/16	1 1/16	6.69	3.35	5.79
27NTR907590	A	2.017	0.10943	3" => 90 mm	3" => 90 mm	2 1/2" => 75 mm	3.31	2.76	2.76	3.98	4.88	1 5/16	1 5/16	1 3/16	6.69	3.35	5.79
27NTR11063110	A	3.327	0.1784	3 1/2" => 110 mm	3 1/2" => 110 mm	2" => 63 mm	3.94	3.94	2.32	3.39	5.75	1 7/16	1 7/16	1 1/16	7.87	3.94	6.81
27NTR11075110	A	3.347	0.1784	3 1/2" => 110 mm	3 1/2" => 110 mm	2 1/2" => 75 mm	3.94	3.94	2.72	3.98	5.75	1 7/16	1 7/16	1 3/16	7.87	3.94	6.81
27NTR11090110	A	3.402	0.1784	3 1/2" => 110 mm	3 1/2" => 110 mm	3" => 90 mm	3.94	3.94	3.35	4.8	5.75	1 7/16	1 7/16	1 5/16	7.87	3.94	6.81
27NTR12563125	A	-	0.34452	4" => 125 mm	4" => 125 mm	2" => 63 mm	4.45	4.45	2.32	3.39	6.5	1 9/16	1 9/16	1 1/16	9.84	6.06	9.31
27NTR12575125	A	5.359	0.2877	4" => 125 mm	4" => 125 mm	2 1/2" => 75 mm	4.45	4.45	2.72	3.98	6.5	1 9/16	1 9/16	1 3/16	9.84	4.53	7.78
27NTR12590125	A	5.412	0.2877	4" => 125 mm	4" => 125 mm	3" => 90 mm	4.45	4.45	3.35	4.8	6.5	1 9/16	1 9/16	1 5/16	9.84	4.53	7.78
27NTR125110125	A	5.6	0.29499	4" => 125 mm	4" => 125 mm	3 1/2" => 110 mm	4.45	4.45	3.94	5.75	6.5	1 9/16	1 9/16	1 7/16	9.84	4.72	7.97

NIRON



ITEM:

NTR

C:\Vault_Temp\Disegni\Schede Tecniche\Niron Grey inches\Socket Fusion Fittings\NI10139.dwg

DESC:

REDUCED TEE - SOCKET FUSION



DRAWING No:

NI10139

SHEET OF REV.

2 2 -11

www.nupiamericas.com - info@nupiamericas.com

All dimensions have to be considered in inches with 5% tolerance if not otherwise mentioned excluding values as per standard ASTM F2389