




SUBMITTAL DATA SHEET	
NI_G_IN_00139.docx	Rev. -1
Sheet 1 of 3	

NIRON CLIMA ELECTROFUSION FITTING ELECTROLET™ BRANCH FITTING WITH BELT SDR 11



ITEM: 27NCOL_
SIZE RANGE: 3" x 1¼" (90 mm x 40 mm) ÷ 12" x 4" (315 mm x 125 mm)
SDR: 11
FUSION RANGE: For Electrofusion – SDR 11 and up
MATERIAL: PP-RCT (Borealis RA 7050 beta crystalline random copolymer PP)
COLOR: Steel Grey

INSTALLATION INSTRUCTIONS:

Electrofusion - Electrofusion in accordance with ASTM F1290 and Nupi America's Niron Installation Manual

PIN SIZE: Ø 0.16 in (4 mm)


LISTINGS:

NSF PW; ANSI/NSF 14; ANSI/NSF 61; ANSI/NSF 51; UPC; IPC; IAPMO; ICC-ES

STANDARDS:

ANSI/NSF 14; ANSI/NSF 61; ASTM F2389; ASTM F2023; CSA B137,11; ASTM E-84***; CAN/ULC S102***; NSF 51; ISO 15874


MAXIMUM OPERATING PRESSURE:

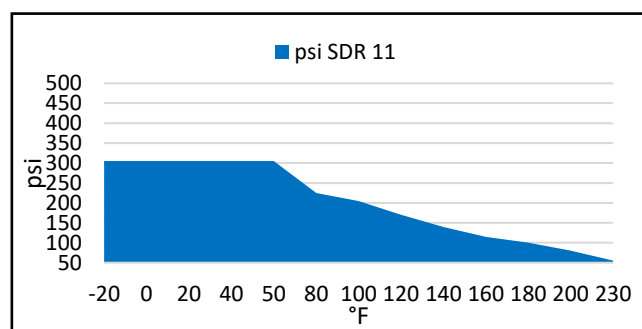


For code or standard question pertaining to NIRON CLIMA Pipe and Fittings, contact Nupi Americas.

PRODUCT INFORMATION AND APPLICATION USE:

Niron Electrofusion Fittings are designed to be joined with electrofusion in accordance with the above listed installation instructions. Fittings are a dry fit type of fitting that have a wire coil embedded in the part which when electric current runs through the wire coil will create heat to fuse the fitting. Pressure rating of the part is temperature dependent and noted in the above pressure rating table. Fitting is injection molded, and of a solid grey color.

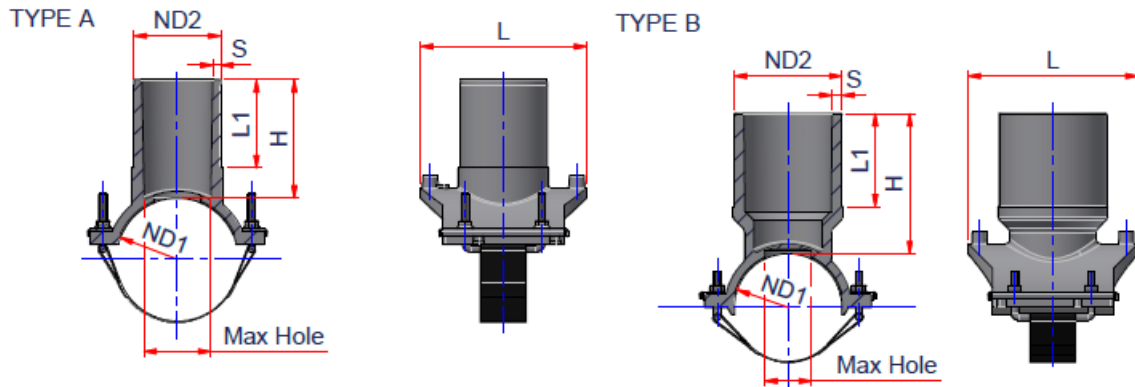

CODE	TYPE	Weight lbs/pc	Volume ft ³ /pc	ND1	ND2	S	L1	L	H	Max Hole
27NCOL16020	A	0.8	3.6808	6" => 160 mm	1/2" => 20 mm	0.12	2.56	5.71	3.94	0.63
27NCOL16025	A	0.974	3.6808	6" => 160 mm	3/4" => 25 mm	0.12	2.56	5.71	3.94	0.63
27NCOL16032	A	0.98	3.6808	6" => 160 mm	1" => 32 mm	0.12	2.56	5.71	3.94	0.89
27NCOL20032	A	0.99	5.4082	8" => 200 mm	1" => 32 mm	0.12	2.56	5.71	3.94	0.89
27NCOL25032	A	1.014	8.0215	10" => 250 mm	1" => 32 mm	0.12	2.56	5.71	3.94	0.89
27NCOL31532	A	1.051	12.1731	12" => 315 mm	1" => 32 mm	0.12	2.56	5.71	3.94	0.89
27NCOL9040	A	0.996	1.4348	3" => 90 mm	1 1/4" => 40 mm	0.15	2.56	5.71	3.94	1.18
27NCOL11040	A	1.004	1.9756	3 1/2" => 110 mm	1 1/4" => 40 mm	0.15	2.56	5.71	3.94	1.18
27NCOL12540	A	1.02	2.4342	4" => 125 mm	1 1/4" => 40 mm	0.15	2.56	5.71	3.94	1.18
27NCOL16040	A	1.04	3.6808	6" => 160 mm	1 1/4" => 40 mm	0.15	2.56	5.71	3.94	1.18
27NCOL20040	A	1.06	5.4082	8" => 200 mm	1 1/4" => 40 mm	0.15	2.56	5.71	3.94	1.18
27NCOL25040	A	1.08	8.0215	10" => 250 mm	1 1/4" => 40 mm	0.15	2.56	5.71	3.94	1.18
27NCOL31540	A	1.005	12.1731	12" => 315 mm	1 1/4" => 40 mm	0.15	2.56	5.71	3.94	1.18
27NCOL9050	A	1.05	1.4348	3" => 90 mm	1 1/2" => 50 mm	0.18	2.56	5.71	3.94	1.5
27NCOL11050	A	1.051	1.9756	3 1/2" => 110 mm	1 1/2" => 50 mm	0.18	2.56	5.71	3.94	1.5
27NCOL12550	A	1.06	2.4342	4" => 125 mm	1 1/2" => 50 mm	0.18	2.56	5.71	3.94	1.5
27NCOL16050	A	1.07	3.6808	6" => 160 mm	1 1/2" => 50 mm	0.18	2.56	5.71	3.94	1.5
27NCOL20050	A	1.073	5.4082	8" => 200 mm	1 1/2" => 50 mm	0.18	2.56	5.71	3.94	1.5
27NCOL25050	A	1.091	8.0215	10" => 250 mm	1 1/2" => 50 mm	0.18	2.56	5.71	3.94	1.5
27NCOL31550	A	1.124	12.1731	12" => 315 mm	1 1/2" => 50 mm	0.18	2.56	5.71	3.94	1.5

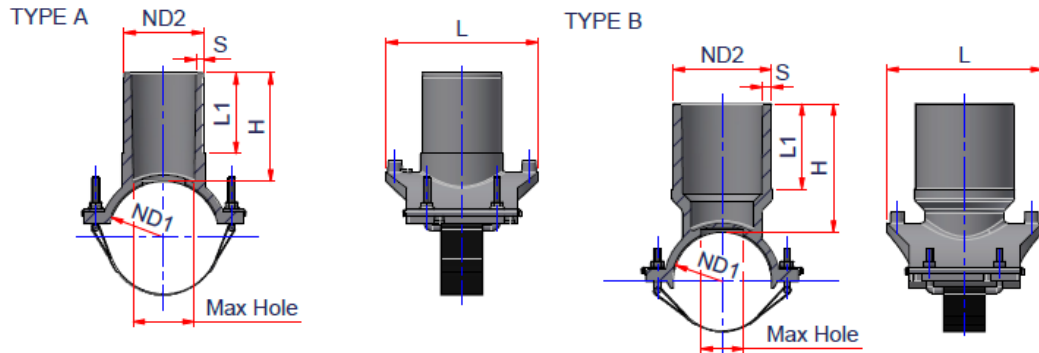

CODE	TYPE	Weight lbs/pc	Volume ft ³ /pc	ND1	ND2	S	L1	L	H	Max Hole
27NCOL16063	A	1.168	3.6808	6" => 160 mm	2" => 63 mm	0.23	2.56	5.71	3.94	1.73
27NCOL20063	A	1.139	5.4082	8" => 200 mm	2" => 63 mm	0.23	2.56	5.71	3.94	1.73
27NCOL25063	A	1.157	8.0215	10" => 250 mm	2" => 63 mm	0.23	2.56	5.71	3.94	1.73
27NCOL31563	A	2.935	16.778	12" => 315 mm	2" => 63 mm	0.23	2.56	7.87	3.94	1.73
27NCOL11075	A	1.988	2.7729	3 1/2" => 110 mm	2 1/2" => 75 mm	0.27	3.54	6.69	4.72	2.20
27NCOL12575	A	1.998	3.4166	4" => 125 mm	2 1/2" => 75 mm	0.27	3.54	6.69	4.72	2.20
27NCOL16075	A	2.006	5.1663	6" => 160 mm	2 1/2" => 75 mm	0.27	3.54	6.69	4.72	2.20
27NCOL20075	A	2.021	7.5909	8" => 200 mm	2 1/2" => 75 mm	0.27	3.54	6.69	4.72	2.20
27NCOL25075	A	2.1	11.2589	10" => 250 mm	2 1/2" => 75 mm	0.27	3.54	6.69	4.72	2.20
27NCOL31575	A	2.2	17.0858	12" => 315 mm	2 1/2" => 75 mm	0.27	3.54	6.69	4.72	2.20
27NCOL9090	B	2.19	2.2016	3" => 90 mm	3" => 90 mm	0.32	3.94	6.69	5.16	2.72
27NCOL11090	A	2.16	2.7729	3 1/2" => 110 mm	3" => 90 mm	0.32	3.54	6.69	4.72	2.72
27NCOL12590	A	2.147	3.4166	4" => 125 mm	3" => 90 mm	0.32	3.54	6.69	4.72	2.72
27NCOL16090	A	2.307	5.1663	6" => 160 mm	3" => 90 mm	0.32	3.54	6.69	4.72	2.72
27NCOL20090	A	2.204	7.5909	8" => 200 mm	3" => 90 mm	0.32	3.54	6.69	4.72	2.72
27NCOL25090	A	3.263	14.3672	10" => 250 mm	3" => 90 mm	0.32	3.86	7.87	5.12	2.72
27NCOL31590	A	3.288	21.8028	12" => 315 mm	3" => 90 mm	0.32	3.86	7.87	5.12	2.72
27NCOL110110	B	2.61	3.3075	3 1/2" => 110 mm	3 1/2" => 110 mm	0.39	3.74	6.69	5.63	3.31
27NCOL160110	A	3.105	6.5926	6" => 160 mm	3 1/2" => 110 mm	0.39	3.86	7.87	5.12	3.31
27NCOL200110	A	3.059	9.6865	8" => 200 mm	3 1/2" => 110 mm	0.39	3.86	7.87	5.12	3.31
27NCOL250110	A	3.527	14.3672	10" => 250 mm	3 1/2" => 110 mm	0.39	3.86	7.87	5.12	3.31
27NCOL315110	A	3.512	21.8028	12" => 315 mm	3 1/2" => 110 mm	0.39	3.86	7.87	5.12	3.31
27NCOL200125	A	3.49	9.6865	8" => 200 mm	4" => 125 mm	0.45	3.86	7.87	5.12	3.74
27NCOL250125	A	3.88	14.3672	10" => 250 mm	4" => 125 mm	0.45	3.86	7.87	5.12	3.74
27NCOL315125	A	3.895	21.8028	12" => 315 mm	4" => 125 mm	0.45	3.86	7.87	5.12	3.74

MANUFACTURER'S WARRANTY:

Thirty (30) Years from the date of sale upon successful completion of pressure test of the piping system (refer to published warranty for complete details).

NOTE:

* More information can be found on NIRON TECHNICAL CATALOGUE

*** For Niron pipe and fittings to meet E-84 and/or CAN/ULC S102.2 for installation in a plenum application, it must be covered with a minimum of 1" or greater E-84 fiberglass insulation

**** Technical Data may undergo dimensional changes, check revision at the top

***** You must scrape the pipe before the welding of the fitting. The perforation of the pipe must be done after the cooling time