

## DESCRIPTION

- Brass Construction
- 1/4 turn stops on each inlet
- Available with 1/2" CC/IPS, PEX, Cold Expansion PEX, or CPVC Connections
- Shower outlet matches inlet connection type
- Tub outlet is CC/IPS

## OPERATION

- Supplied Flush Plug allows testing up to 200 PSI with air (300 PSI water)
- Installation in thin or thick wall applications

## CARTRIDGE


- Cartridge is supplied in the M-CORE™ Trim Kit

## STANDARDS

- Third party certified to meet ASME A112.18.1/CSA B125.1, and all applicable requirements referenced therein

## WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
  - 10 year limited warranty when used in a multifamily installation
  - 5 year limited warranty when used in a commercial installation
- Visit [www.moen.com/support](http://www.moen.com/support) for complete details and limitations

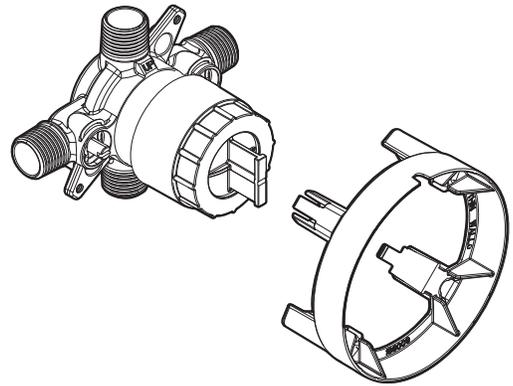

### M-CORE™


### 4 Port Rough-In Valve With 1/4 Turn Stops

#### Models:

U140CIS  
U140XS  
U140CXS  
U140VS

#### Inlet Connection

CC/IPS  
PEX  
Cold Expansion PEX  
CPVC

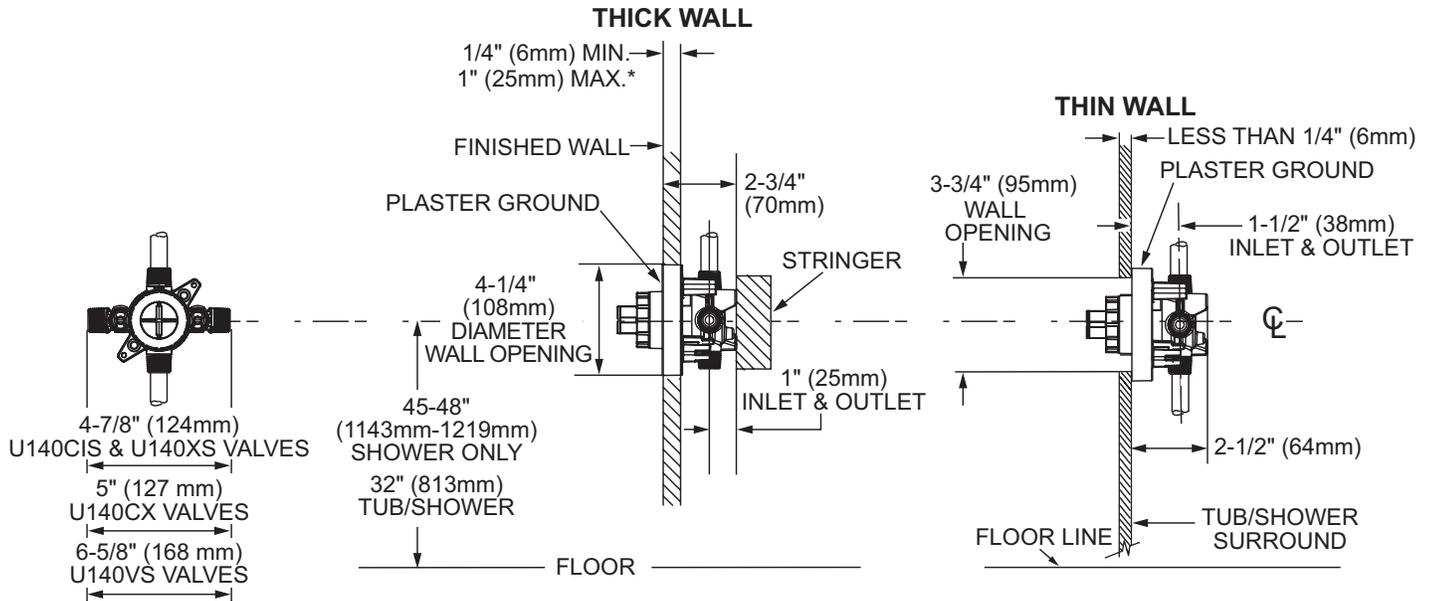

\* Walls thicker than 1" (25mm) require optional extension kit.

### CRITICAL DIMENSIONS

(DO NOT SCALE)

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN

[www.moen.com](http://www.moen.com)