



# SUBMITTAL INFORMATION

## Ductile Iron Couplings - (FC1-xxx-xxx style)



### STYLE FC1 COUPLINGS FOR CAST, DUCTILE IRON, PVC PIPE OR \*HDPE

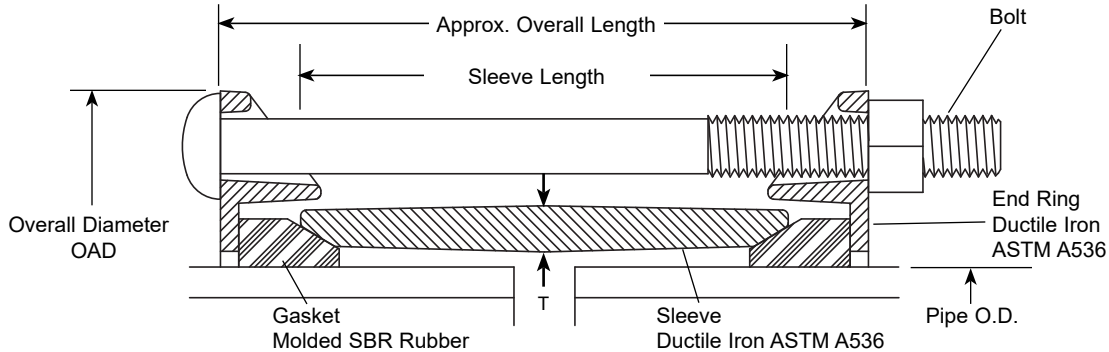

NOM. PIPE SIZE	GASKET RANGE 1ST HALF CAT. #	END RING COLOR	BY	GASKET RANGE 2ND HALF CAT. #	END RING COLOR	CENTER SLEEVE		BOLTS			APPROX. OVERALL LGTH.	OAD	APPROX. Wt. LBS.	CATALOG NUMBER	✓ SUBMITTED ITEM(S)
						LGTH.	APPROX. (T) THICKNESS	DIA.	LGTH.	QTY.					
2"	2.34 - 2.63	Red	✗	2.34 - 2.63	Red	4"	5/16"	5/8"	6-1/2"	2	5-1/8"	5-5/8"	6	FC1-263-263	
2-1/2"	See 2" FC2A														
4"	4.00	Red	✗	4.00	Red	5"	3/8"	5/8"	8"	3	6-1/8"	8-5/16"	14	FC1-400-400	
	4.00	Red		4.50 - 4.80	Red									FC1-400-480	
	4.00	Red		4.80 - 5.10	Black									FC1-400-510	
	4.50 - 4.80	Red		4.50 - 4.80	Red									FC1-480-480	
	4.50 - 4.80	Red		4.80 - 5.10	Black									FC1-480-510	
	4.80 - 5.10	Black		4.80 - 5.10	Black									FC1-510-510	
6"	6.00	Red	✗	6.00	Red	5"	3/8"	5/8"	8"	4	6-1/8"	10-1/2"	20	FC1-600-600	
	6.00	Red		6.63 - 6.90	Red									FC1-600-690	
	6.00	Red		6.90 - 7.20	Black									FC1-600-720	
	6.30	Red		6.30	Red									FC1-630-630	
	6.63 - 6.90	Red		6.63 - 6.90	Red									FC1-690-690	
	6.63 - 6.90	Red		6.90 - 7.20	Black									FC1-690-720	
8"	8.00	Red	✗	8.00	Red	5"	3/8"	5/8"	8"	5	6-1/8"	12-13/16"	29	FC1-720-720	
	8.00	Red		8.63 - 9.05	Red									FC1-800-800	
	8.00	Red		8.63 - 9.05	Black									FC1-800-905	
	8.16 - 8.40	Red		8.16 - 8.40	Black									FC1-800-940	
	8.63 - 9.05	Red		8.63 - 9.05	Red									FC1-840-840	
	8.63 - 9.05	Red		9.05 - 9.40	Black									FC1-905-905	
10"	9.05 - 9.40	Black	✗	9.05 - 9.40	Black	6"	7/16"	5/8"	9"	6	7-1/8"	15"	41.5	FC1-905-940	
	10.20 - 10.50	Red		10.20 - 10.50	Red									FC1-940-940	
	10.75	Red		10.75	Red									FC1-1050-1050	
	10.75	Red		11.10 - 11.46	Black									FC1-1075-1075	
12"	11.10 - 11.46	Black	✗	11.10 - 11.46	Black	6"	1/2"	5/8"	9"	7	7-1/8"	17-7/8"	54.5	FC1-1075-1146	
	12.24 - 12.50	Red		12.24 - 12.50	Red									FC1-1146-1146	
	12.75	Red		12.75	Red									FC1-1250-1250	
	12.75	Red		13.20 - 13.56	Black									FC1-1275-1275	
	13.20 - 13.56	Black		13.20 - 13.56	Black									FC1-1275-1356	
														FC1-1356-1356	

**Note:** Restrain if necessary to provide thrust resistance. Flexible couplings do not prevent axial pipe movement.

\* Ford recommends the use of a properly sized insert stiffener when using HDPE

### FEATURES

- Bolts and Nuts: High strength low alloy steel per ASTM A242 or AWWA C111
- Coating: Black alkyd enamel shop coat
- NSF 61 approved
- Complies with AWWA C219

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current.



**The Ford Meter Box Company, Inc.**  
 P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443  
 Phone: 260-563-3171 / Fax: 800-826-3487  
 Overseas Fax: 260-563-0167  
 www.fordmeterbox.com

08/04/17

Submitted By: