



# SUBMITTAL INFORMATION

## Stainless Steel Inserts - (INSERT-xx style)



### STAINLESS STEEL INSERTS FOR POLYETHYLENE PIPE (PEP) OR TUBING (PET)

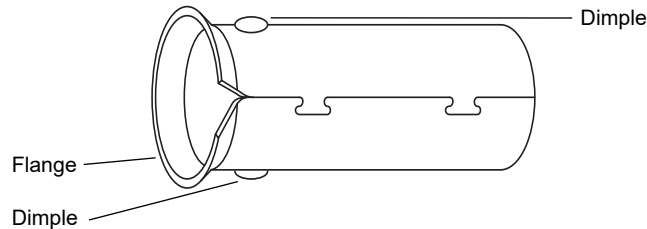

#### 70 Series For Polyethylene Pipe (PEP)

| CATALOG NUMBER     | NOMINAL SIZE | PEP ID | LENGTH   | ✓ SUBMITTED ITEM(S) |
|--------------------|--------------|--------|----------|---------------------|
| INSERT-71          | 3/4"         | 0.824  | 1-11/16" |                     |
| ** INSERT-53-72    | 1"           | 1.049  | 2-5/16"  |                     |
| ◆** INSERT-53-72-Q | 1"           | 1.049  | 1-31/32" |                     |
| INSERT-73          | 1-1/4"       | 1.380  | 2-5/16"  |                     |
| INSERT-74          | 1-1/2"       | 1.610  | 2-59/64" |                     |
| INSERT-75          | 2"           | 2.067  | 2-15/16" |                     |

#### 50 series For Polyethylene Tubing (PET)

| CATALOG NUMBER     | NOMINAL SIZE | PET ID | LENGTH   | ✓ SUBMITTED ITEM(S) |
|--------------------|--------------|--------|----------|---------------------|
| INSERT-51          | 3/4"         | 0.681  | 1-35/64" |                     |
| INSERT-52          | 1"           | 0.875  | 1-43/64" |                     |
| ** INSERT-53-72    | 1-1/4"       | 1.069  | 2-5/16"  |                     |
| ◆** INSERT-53-72-Q | 1-1/4"       | 1.069  | 1-31/32" |                     |
| INSERT-54          | 1-1/2"       | 1.263  | 2-15/16" |                     |
| INSERT-55          | 2"           | 1.653  | 2-15/16" |                     |
| ◆ INSERT-54-Q      | 1-1/2"       | 1.263  | 2-7/16"  |                     |
| ◆ INSERT-55-Q      | 2"           | 1.653  | 2-7/16"  |                     |

\* Weights for insert stiffeners are for standard package quantities.

\*\*INSERT-53 and -72 fit both 1-1/4" plastic tubing (1.069 I.D.) and 1" plastic pipe (1.049 I.D.).

◆ These inserts are specifically designed and required for Quick Joint fittings. They are not interchangeable with other Compression Fittings.

#### FEATURES

- Certified to NSF/ANSI Standard 61 and NSF/ANSI Standard 372 where applicable
- Insert stiffeners conform to the AWWA Standard C901 for Polyethylene (PE) Pressure Pipe and Tubing
- Insert stiffeners are solid 304 tubular stainless steel (ASTM 240-92B)
- Dimpled and flanged to retain placement within the service line
- Key lock construction with a minimum of two key locks to maintain solid structural integrity
- Manufactured in the United States of America

**Note:** Consult pipe or tubing manufacturer for specific installation requirements. Ford recommends using insert stiffeners when using plastic pipe or tubing

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current.



**The Ford Meter Box Company, Inc.**

P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443

Phone: 260-563-3171 / Fax: 800-826-3487

Overseas Fax: 260-563-0167

www.fordmeterbox.com

10/07/16

Submitted By: