

TRADITIONAL 2010

Instant Hot Water Faucet FH2010

FEATURES:

- Hot only faucet – dispenses near-boiling water
- For use with an InSinkErator instant hot water tank and filtration system (sold separately)
- Self-closing hot valve for automatic shut off
- Handle moves forward to avoid hitting backsplash
- Spout swivels 360° for convenience

MATERIAL:

- Reverse osmosis certified and compatible per NSF/ANSI 58
- Solid brass construction
- Corrosion resistant ceramic disc valve

FINISHES:

Chrome • Stainless Steel • Arctic Steel • Brushed Bronze
Polished Nickel • Oil Rubbed Bronze • Classic Oil Rubbed
Bronze

WARRANTY:

We Come To You® 5-Year In-Home Limited Warranty.
Covers parts and labor.


The complete InSinkErator warranty is included in the Care & Use booklet with each unit.

CERTIFICATIONS:

NSF/ANSI 372 • NSF/ANSI 58 • NSF/ANSI 42/53
NSF/ANSI 61 • ASME A112.18.1 • UPC Certified
ASSE 1023 • ADA Compliant



| | |
|---------------------------------------|---|
| Supply Connection | 1/4" (0.64 cm) Compression and/or push fitting |
| Required Sink Hole Diameter | 1-3/8" - 1-1/2" (3.49 cm - 3.81 cm) Standard Sink Hole |
| Required Supply Pressure | 25-125 psi (172-862 kPA or 1.7-8.6 bar) |
| Backsplash Clearance for Installation | Minimum 2" (5.08 cm) required from sink hole center to backsplash |
| Counter Thickness | Maximum of 3" (7.62 cm) |
| Shipping Weight | 4.01 lb (1.82 kg) |

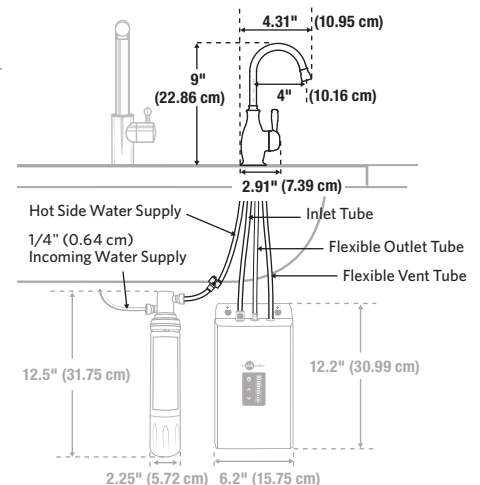

USA: 1.800.558.5700 www.insinkerator.com
CA: 1.800.561.1700 www.insinkerator.ca

InSinkErator may make improvements and/or changes in the specifications at any time, in its sole discretion, without notice or obligation and further reserves the right to change or discontinue models.

©2020 InSinkErator, InSinkErator® is a business unit of Emerson Electric Co. All rights reserved.