



see what Delta can do™

# SHOWER HEAD

## ■ H<sub>2</sub>Okinetic® Shower Head

### FEATURES:

- Touch-Clean® Nozzles
- H<sub>2</sub>Okinetic® UltraSoak™ Spray

### STANDARD SPECIFICATIONS

- Max flow rate 1.75 gpm at 80 psi, 6.6 L/min @ 550 kPa (52161-▲)
- Max flow rate 2.5 gpm at 80 psi, 9.5 L/min @ 550 kPa (52161-▲25)
- Ball connector swivel angle is 44° (22° per side)
- Metal ball connector for durability, easy installation
- Standard 1/2"-14 NPT pipe fitting

### WARRANTY


- Parts and Finish - Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date of purchase.
- Electronic Parts and Batteries (if applicable) - 5 years from the date of purchase; or for commercial purchasers, 1 year from the date of purchase. No warranty is provided on batteries.




### COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1
- EPA WaterSense® - applies to 52161-▲ only

### Spray Patterns




H<sub>2</sub>Okinetic®  
UltraSoak™ Spray

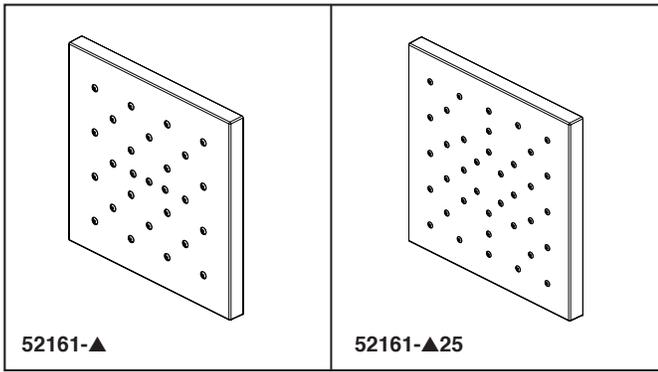

Submitted Model No.: \_\_\_\_\_

Specific Features: \_\_\_\_\_

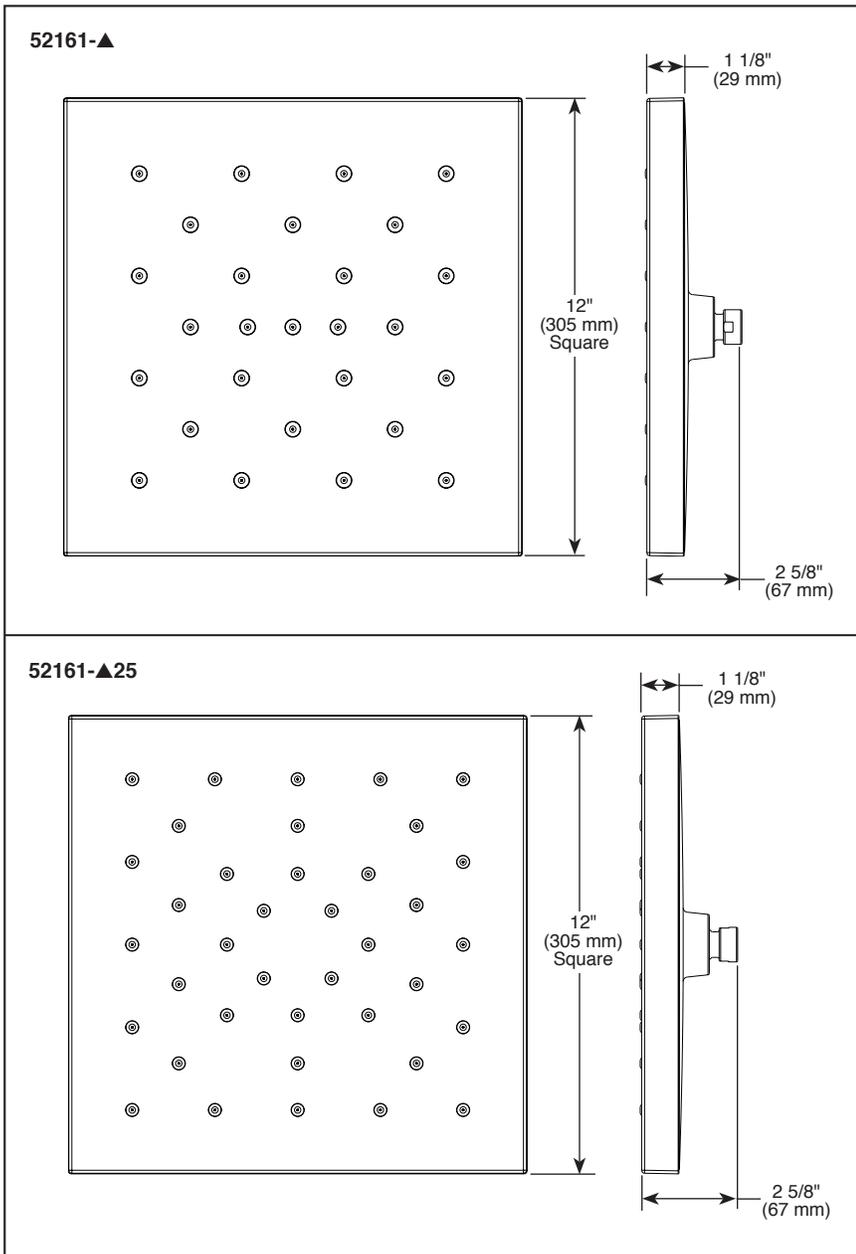

▲ Designate proper finish suffix

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or [www.deltafaucet.com](http://www.deltafaucet.com) for finish options and product availability.

### Delta Faucet Company

55 E. 111th Street, Indianapolis, IN 46280  
350 South Edgeware Road, St. Thomas, ON N5P 4L1  
© 2020 Delta Faucet Company