### Parallel™



# Rite-Temp™ bath and shower trim kit, 2.5 gpm K-TS23502-4

#### **Features**

- Pressure-balancing diaphragm technology maintains outlet temperature within +/-3°F during water pressure fluctuations
- Antiscald protection
- A single handle controls both on/off activation and temperature setting
- 6-1/4" (159 mm) diverter bath spout with slip-fit connection
- 2.5 gpm (9.5 lpm) showerhead with Katalyst™ spray technology
- MasterClean<sup>™</sup> sprayface features an easy-to-clean surface that withstands mineral buildup
- Coordinates with other products in the Parallel collection

#### Material

- Premium material construction with metal handle ensures reliability and durability
- KOHLER finishes resist corrosion and tarnishing

#### **Technology**

 Katalyst<sup>™</sup> air-induction technology infuses water with air, creating bigger drops for a more powerful spray

#### Installation

 Trim only; requires valve to complete installation (sold separately)

#### **Included Components**

Additional Components:

Faceplate

Shower arm with flange







#### Codes/Standards

ASME A112.18.1/CSA B125.1 DOE - Energy Policy Act 1992

## KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.


#### **Available Colors/Finishes**

Color tiles intended for reference only.

| Color | Code | Description              |
|-------|------|--------------------------|
|       | CP   | Polished Chrome          |
|       | AF   | Vibrant™ French Gold     |
|       | BN   | Vibrant™ Brushed Nickel  |
|       | BV   | Vibrant™ Brushed Bronze  |
|       | BL   | Matte Black              |
|       | 2MB  | Vibrant™ Brushed Moderne |
| _     |      | Brass                    |
|       | TT   | Vibrant Titanium         |



Rite-Temp<sup>™</sup> bath and shower trim kit, 2.5 gpm K-TS23502-4

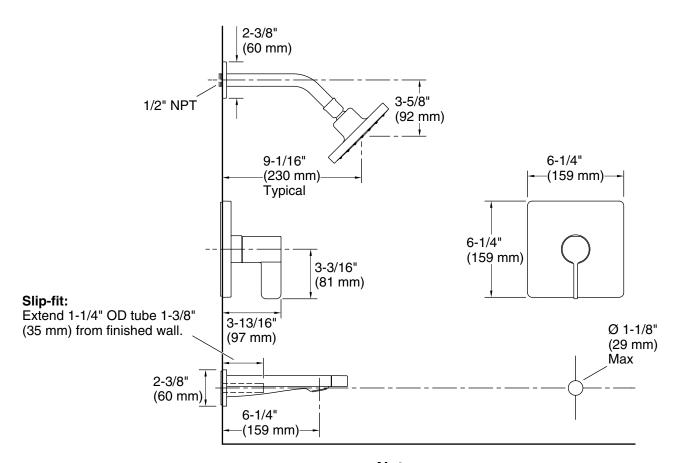

#### **Technical Information**

All product dimensions are nominal.

Drain included: No

Spout:

Spout reach: 6-1/4" (158 mm)

#### **Showerhead/Body Spray:**

Rated maximum 2.5 gal/min (9.5 l/min)

flow:

Pressure: 45 psi (3.1 bar)

#### **Notes**

Install this product according to the installation instructions.

