KOHLER, Faucets

Wall-mount single-handle bathroom sink faucet, 1.2 gpm

K-22567-4

Features

- A single handle controls both on/off activation and temperature setting
- 8-3/4" (222 mm) stationary spout reach
- 1.2 gpm (4.5 lpm) maximum flow rate at 60 psi (4.14 bar)
- KOHLER ceramic disc valves exceed industry longevity standards for a lifetime of durable performance
- Coordinates with other products in the Parallel collection

Material

- Premium metal construction for durability and reliability
- KOHLER finishes resist corrosion and tarnishing

Installation

Wall-mount

Recommended Products/Accessories

K-21897 Double toilet paper holder

K-23524 18" towel bar

K-23525 24" towel bar

K-23526 Towel arm

K-23527 Vertical toilet paper holder

K-23528 Pivoting toilet paper holder

K-23529 Robe hook

Optional Products/Accessories

K-7107 Decorative Drain

K-7108 Decorative Drain

K-7114 Pop-Up Drain

K-7114-A Pop-Up Drain

K-7124 Pop-Up Clicker Drain

K-7124-A Pop-Up Clicker Drain

K-7127 Drain

K-7127-A Drain

K-7129 Drain

K-7129-A Drain

Included Components

Additional Components:

Wall Mount Single Control Valve





Codes/Standards

ASME A112.18.1/CSA B125.1

NSF/ANSI/CAN 61

NSF/ANSI/CAN 372

All applicable US Federal and State material

regulations

DOE - Energy Policy Act 1992

EPA WaterSense®

California Energy Commission (CEC)

ADA

ICC/ANSI A117.1

CSA B651

OBC

KOHLER® Faucet Lifetime Limited Warranty


See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.

Color	Code	Description
	CP	Polished Chrome
	BN	Vibrant® Brushed Nickel
	BL	Matte Black
	2MB	Vibrant® Brushed Moderne
		Brass






Wall-mount single-handle bathroom sink faucet, 1.2

gpm

K-22567-4

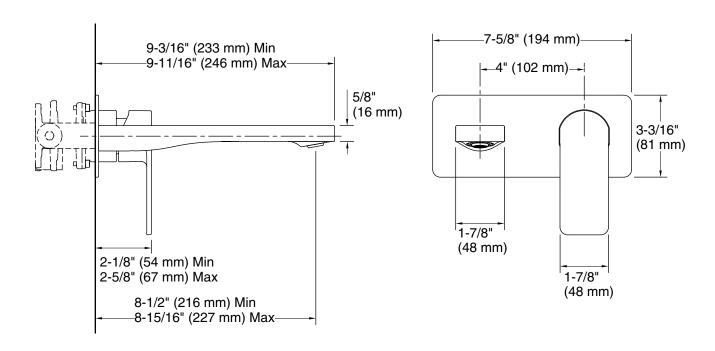

Technical Information

All product dimensions are nominal.

Faucet:

Flow rate: 1.2 gal/min (4.5 l/min)

60 psi (4.1 bar) Pressure: Cast brass

Valve body:

Drain included:

Spout:

Spout reach: 8-1/4" (210 mm)

Notes

Install this product according to the installation instructions.

ADA compliant for handles only.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

