



VITREOUS CHINA

URINAL  
**27-740**



## LAFAYETTE™ Washout Wall Hung




### Features:

- Low Consumption 1.0 gpf (3.8 Lpf)
- Minimum Wall Space
- Integral Strainer
- One-Piece Hanger
- For Exposed Flushometer (top spud)
- 1" x 3/4" Inlet
- 11/2" x 11/2" Outlet
- ADA Compliant

### Dimensions:

Height ..... 18 1/2"  
Width ..... 13 1/2"  
Depth ..... 13 1/4"  
Inlet ..... 3/4"  
Outlet ..... 1 1/2"  
Shipping Weight ..... 31 lbs

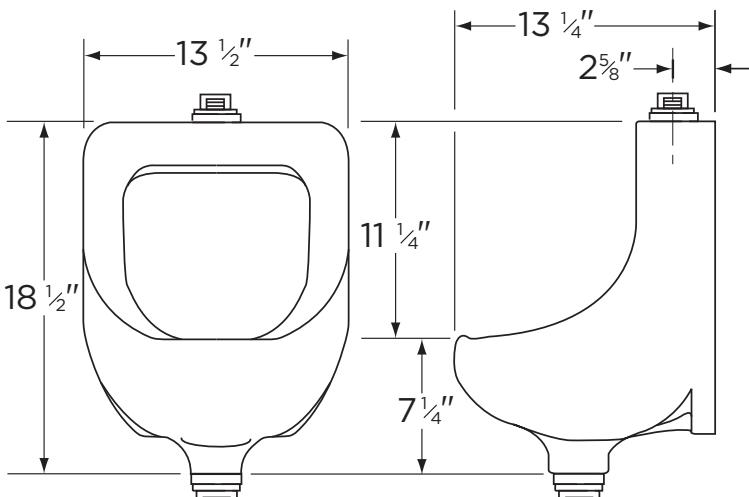

RECOMMENDED STATIC WATER PRESSURE FOR PLUMBING FIXTURES IS 20 - 80 PSI STATIC PER ANSI STANDARDS A112.19.2M APPENDIX B.

THIS FIXTURE QUALIFIES ACCORDING TO ASME TEST PROCEDURES AS A LOW CONSUMPTION WATER CLOSET WITH AN AVERAGE CONSUMPTION OF 1.6 gpf (6 Lpf) OR LESS.



[www.gerberonline.com](http://www.gerberonline.com)

Job Name	
Date	
Model Specified	
Quantity	
Customer	
Contractor	
Architect/engineer	

LAVATORIES

TOILETS

BIDETS / URINALS


CAST IRON



## LAFAYETTE™

27-740

Low Consumption Washout Wall Hung Urinal

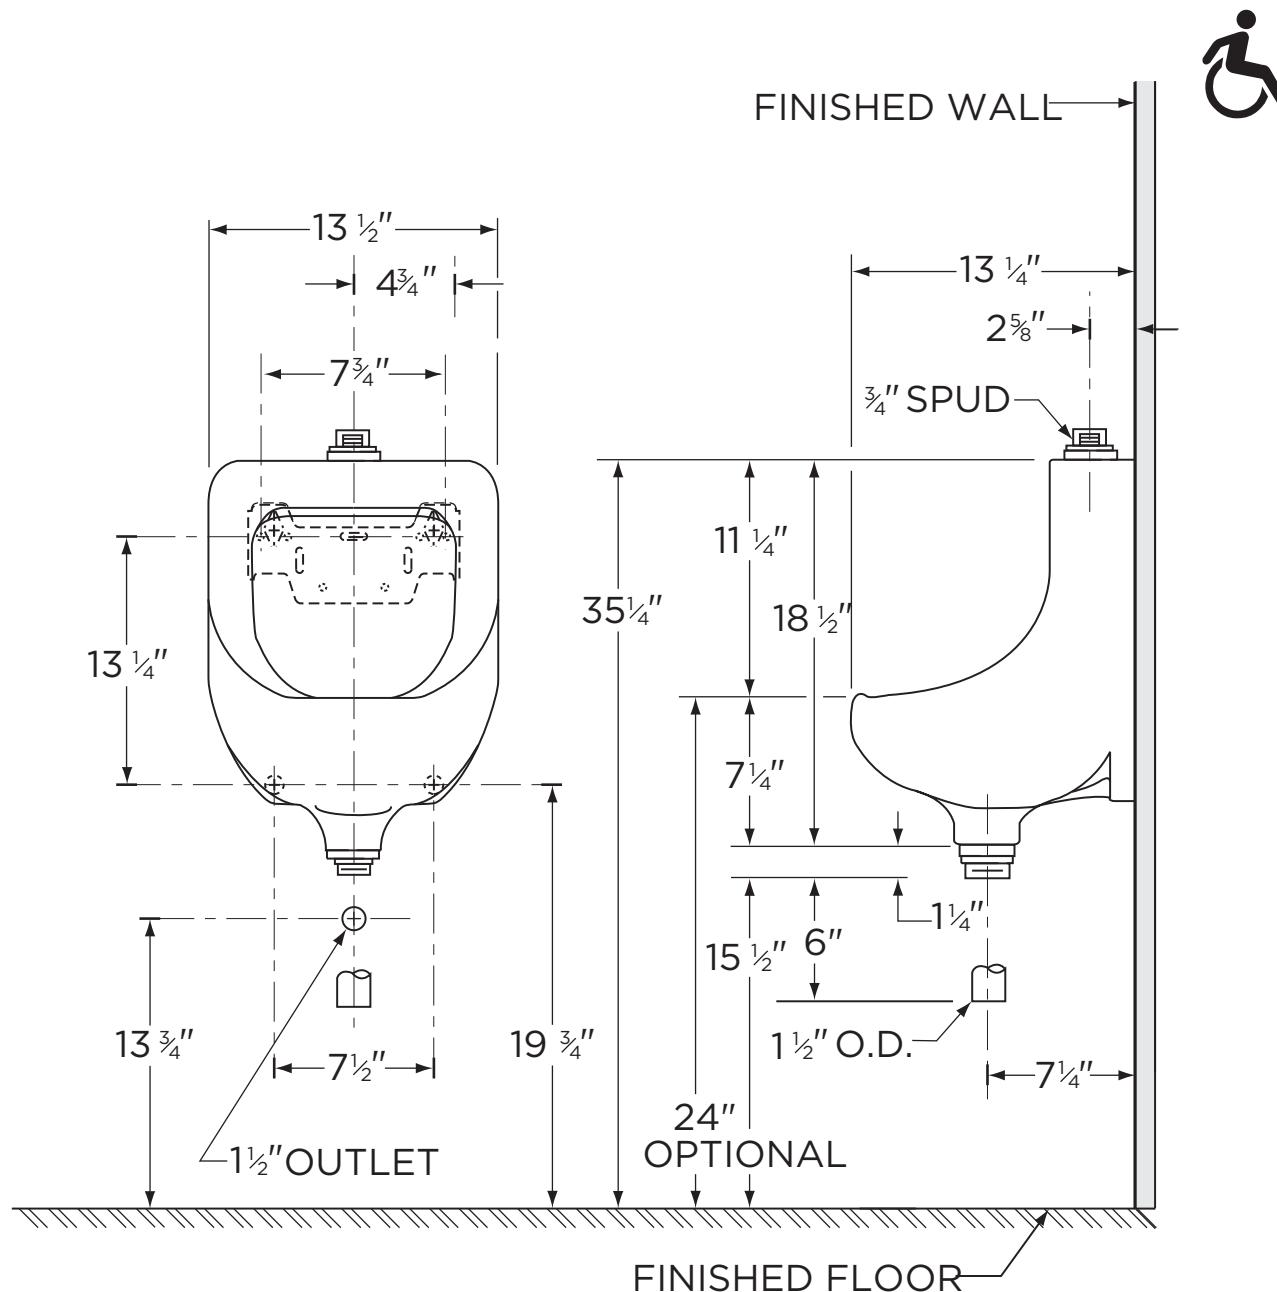

### NOTES:

All dimensions are in inches. Use flush valve MFR'S recommended rough-in.

Recommended static water pressure for plumbing fixtures is 20-80 psi static per ANSI standards A112.19.2 Appendix B.

Illustrations may not be drawn to scale.

### PLUMBERS NOTE:

Provide suitable reinforcement for all wall supports.

### IMPORTANT:

Dimensions of fixtures are nominal and may vary within the range of tolerances established by ASME Standard A 112.19.2.

THIS FIXTURE QUALIFIES ACCORDING TO ASME TEST PROCEDURES AS A LOW CONSUMPTION URINAL WITH AN AVERAGE CONSUMPTION OF 1.0 gpf (3.8 Lpf) OR LESS.