

ONLY ONE COMPANY MAKES 10" & 15" INJECTION MOLDED GASKETED SEWER FITTINGS



Multi Fittings is the only manufacturer to offer gasketed 12" and 15" SDR 35 molded sewer fittings in a range of wyes, tees and elbows.

Ideal for wastewater and stormwater applications, as well as the conveyance of industrial wastes, our large diameter molded sewer fittings are designed to exceed all applicable standards and are built to withstand higher impact forces, higher loads and survive the roughest jobsite handling. The impact strength of our sewer fittings exceed the requirements of ASTM F1336 by at least 25%.

For over 50 years, Multi Fittings has been an industry leader in offering the most comprehensively engineered and tested fittings for plastic pipe in North America.

Multi Fittings produces the widest range of injection molded fittings for pressurized watermains and sewer forcemains, gravity flow sewers and drain, waste and vent applications.

TRENCH TOUGH PLUS™

SIZES

4" & 15"




MULTI FITTINGS

Telephone: 519 681-2140

Toll Free: 800 265-1815

Fax: 519 681-2156

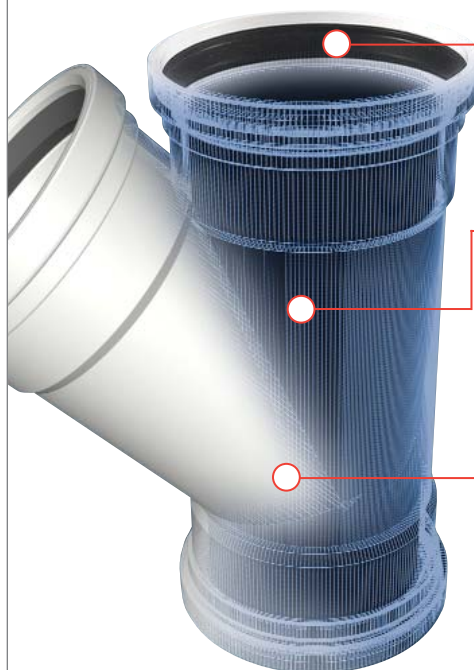

Locked-in Gasket Design

Makes assembling the joints easy, requiring less brute force in the trench, while ensuring leak-proof reliability in the ground.

Advanced Material Formulation

Leading crush-resistance, yet our fittings can flex to accommodate the extreme loads that cause rigid fittings to fail.

Structural Reinforcements

Reinforced at key intersecting locations where it's needed for added strength without losing flexibility.

more information on back ►

FEATURES & BENEFITS

Easy to Install

Lightweight and easy to handle; with the patented Trench Tough Plus locked-in gasket design.

Joint Strength

Manufactured to allow for a high degree of joint deflection, reducing the risks caused by soil settlement or shifting.

Structural Strength

Leads the industry in crush-resistance and able to handle extreme loads underground.

Impact Strength

Designed to withstand the rigors of the job site, exceeding ASTM impact standards.



Telephone: 519 681-2140
Toll Free: 800 265-1815
Fax: 519 681-2156




MULTI FITTINGS

LAYING LENGTH

ISSUE DATE: OCT 30/17
SUPERCEDES: MAR 11/05

45° WYE (GxGxG)

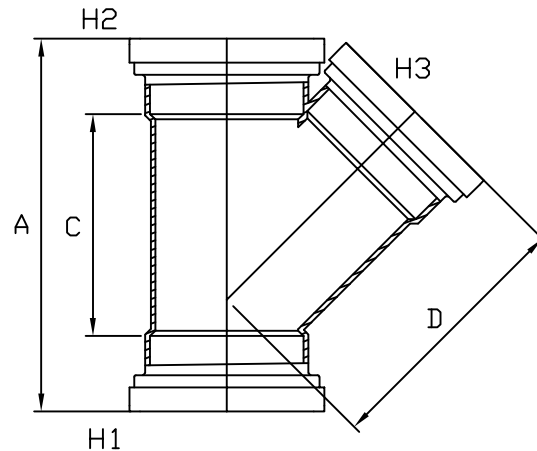

INJECTION MOLDED FITTING (M)

	SIZE H1xH2xH3	PART NUMBER	A REF	C REF	D REF
M =	4x4x4	063304	10.250	6.125	7.375
M =	6x6x4	063307	12.375	6.500	9.000
M =	6x6x6	063306	14.875	9.000	10.750
<> M =	8x8x4	063294	13.375	6.500	10.625
M =	8x8x6	063296	15.750	8.875	12.250
M =	8x8x8	063298	19.000	12.125	13.875
M =	10x10x4	043311	17.250	9.375	12.500
M =	10x10x6	043312	17.125	9.375	13.875
M =	10x10x8	043313	22.875	15.000	15.000
M =	10x10x10	043308	22.875	15.000	17.000
M =	12x12x4	043319	18.125	9.375	14.500
M =	12x12x6	043276	18.250	9.375	15.875
M =	12x12x8	043314	26.750	17.875	16.375
M =	12x12x10	043315	26.750	17.875	18.000
M =	12x12x12	043309	26.750	17.875	20.000
M =	15x15x4	043320	22.250	12.750	15.000
M =	15x15x6	043153	22.250	12.750	16.750
M =	15x15x8	043316	22.250	12.750	19.000
M =	15x15x10	143317	31.625	22.250	20.000
M =	15x15x12	143318	31.625	22.250	24.375
M =	15x15x15	143310	31.625	22.250	23.875

Note: = Refer to Page G4 for Hub Detail, Type A
<> 4" Deep hub