




- Designed for high temperature work environs up to 180°F / 80°C
- Great for pest control and water damage restoration applications•
- Features a SEALED Motor to Protect it from Contaminants and Water Damage
- Low 1.6 Amps Draw with 1720 CFM Max. Airflow Capacity
- Rack/stand Included Allowing 360-Degree Rotation
- Lightweight & Stackable up to 5 units high for Easy Storage





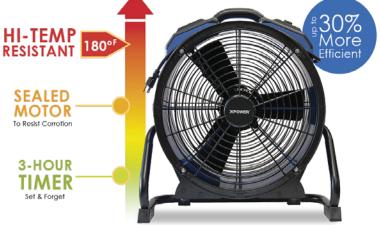





SPECIFICATIONS

AIRFLOW DIAGRAMS



Extermal roto-motor and front grill design creates focused air flow that travels up to 160ft



Bounce the air off of walls is smaller rooms so air reaches every corner





MODEL NO.	X-35AR
VOLTZ/HERTZ	115V / 60 Hz
MOTOR	1/4 HP
POWER	1.6 Amps
RATED AIRFLOW	1720 CFM
SPEED	Variable Speed
CORD LENGTH	20 Ft.
OPERATING POSITION	360 Degree
STACKABLE	5 Units
UNIT WEIGHT	17.6 Lbs.
UNIT DIMENSIONS (LxWxH)	18.6 x 19.2 x 9.4 in.
HOUSING	ABS+PC
SAFETY CERTIFICATIONS	ETL / CETL
DUAL THERMAL PROTECTION	Yes
PALLET QUALITY	42 Units

FEATURES

360° Rotation







Built in Power Outlet



Stackable



PRODUCT FEATURES

Auxiliary Outlet with Circuit Breaker for Daisy Chain

Sealed Motor that Produces Efficient, Powerful and Quiet Airflow

Specially Designed Air Fin Guide for More Focused & Extended Airflow Range Up to 160 ft.



Variable Speed Control Switch

Durable ABS or ABS+PC Housing Design

Quick Release Knob for Easy Angle Adjustment

Rack / Stand Allowing 360° Angle Rotation