



Craftsman Grid

Features 9170-A

- · Available in 27 finishes including 12 PVD finishes
- · All brass decorative grid with no visible surface screws
- · Surface is foot friendly with no sharp edges
- · Rigid grid construction will not dish or bend
- Square design for easy floor design and installation
- Outlet flow rate: 18 gpm (69 L/min) with 1/4" head of water when installed with drain rough 9177
- Drain rough or throat (9177, 9178, or 9178-UG-2) sold separately




Codes/Standards Applicable


Product meets or exceeds the following:

- ASME A112.18.2/CSA B125.2
- US PAT NO. 8043497



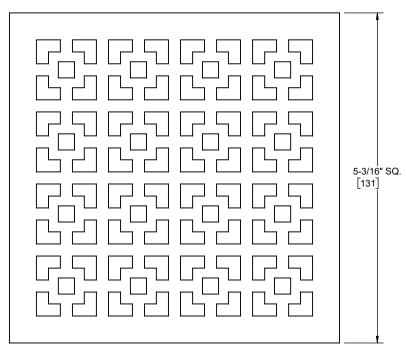

open area = 8.43 in² [5438.7 mm²]

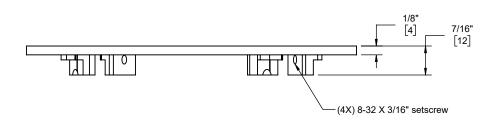

Dimensions are inches, rounded to 1/16" [Dimensions in brackets are mm, rounded to 1mm]