



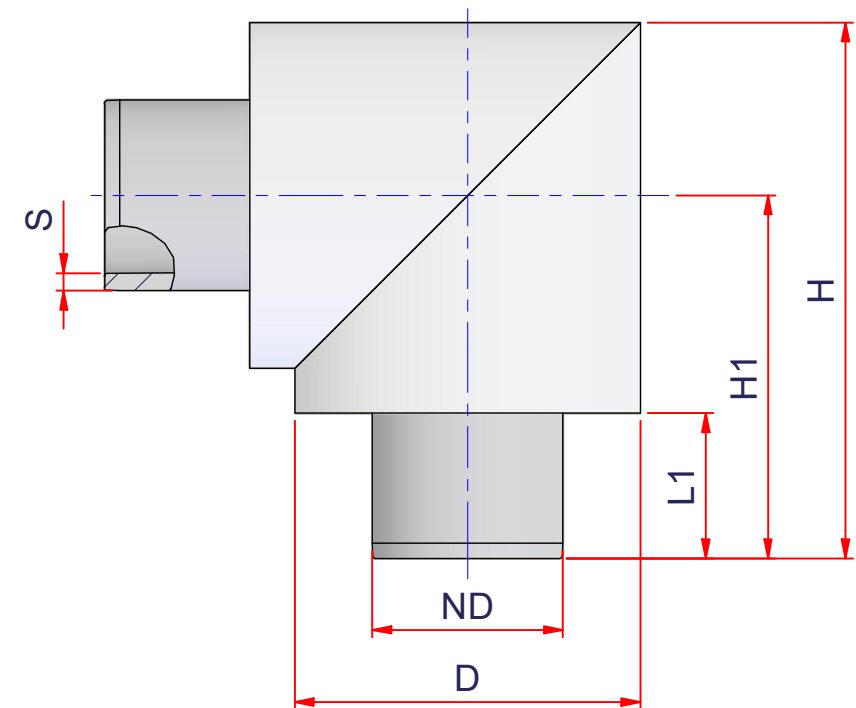

CODE	Weight lbs/pc	Volume ft ³ /pc	ND	D	S	L1	H1	H
27NGAP329MML	2.185	0.397	1" => 32 mm	3.5	0.14	2	12.25	14
27NGAP4011MML	2.326	0.397	1 1/4" => 40 mm	3.5	0.15	2	12.25	14
27NGAP5011MML	3.803	0.6257	1 1/2" => 50 mm	4.5	0.18	2.5	13.25	15.5
27NGAP6311MML	4.431	0.6257	2" => 63 mm	4.5	0.23	2.5	13.25	15.5
27NGAP7511MML	9.498	1.2857	2 1/2" => 75 mm	6.625	0.27	3	15	18.31
27NGAP9011MML	11.006	1.2857	3" => 90 mm	6.625	0.32	3	15	18.31
27NGAP11011MML	18.459	2.2672	3 1/2" => 110 mm	8.625	0.39	4	17	21.31
27NGAP12511MML	21.049	2.2672	4" => 125 mm	8.625	0.45	4	17	21.31
27NGAP16011MML	32.512	3.3991	6" => 160 mm	10.75	0.57	4	18	23.38
27NGAP20011MML	50.625	4.94	8" => 200 mm	12.75	0.72	4.5	19.5	25.88
27NGAP25011MML	65.868	6.127	10" => 250 mm	14	0.89	5	20.5	27.5
27NGAP31511MML	103.084	8.6134	12" => 315 mm	16	1.13	6	22.5	30.5

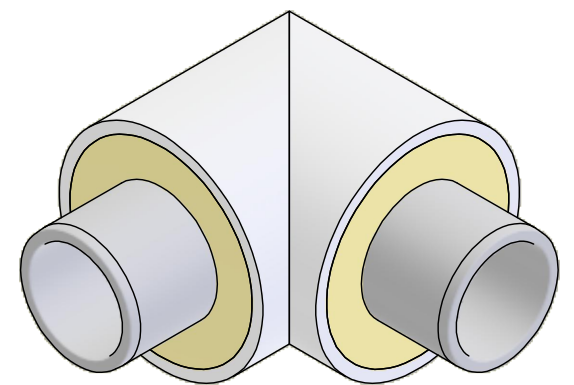

 	ITEM: NGAP_9MML NGAP_11MML	DESC: 90° BEND PREINSULATED WITH PP-R JACKET PIPE EXTENDED SDR9/11		DRAWING No: AP00016	
	C:\Vault_Temp\Disegni\Schede Tecniche\Niron ALL PRO\Preinsulated butt fusion fittings\AP00016.dwg			SHEET OF 1 1	REV. -2
www.nupiamericas.com - info@nupiamericas.com		All dimensions have to be considered in inches with 5% tolerance if not otherwise mentioned excluding values as per standard ASTM F2389			