

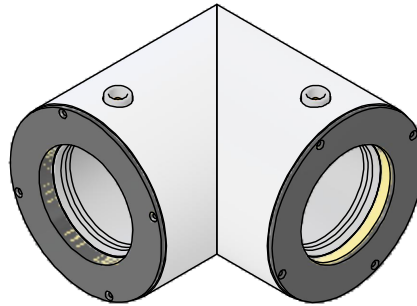
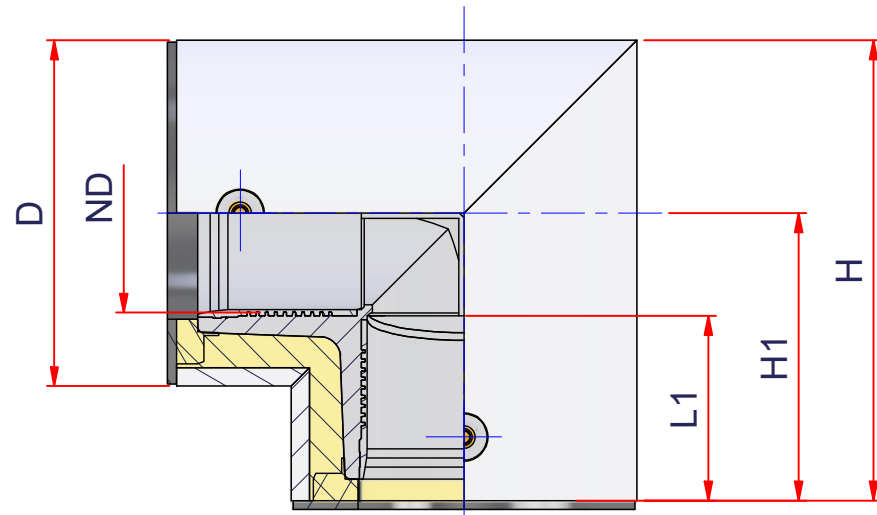


TYPE A

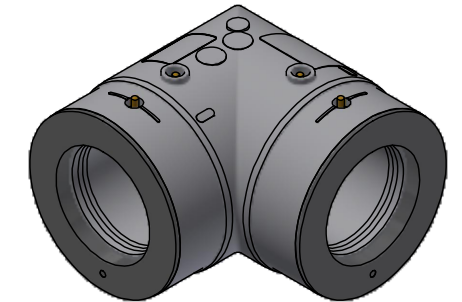

TYPE B

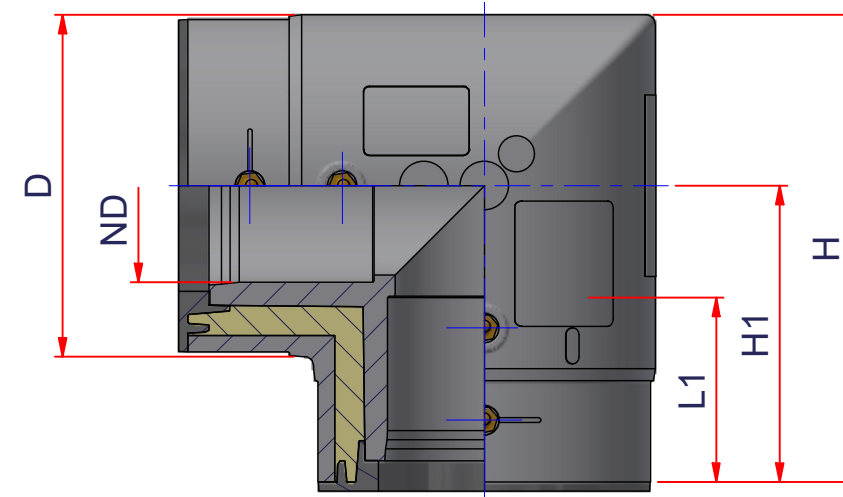

CODE	TYPE	Weldable SDR	Weight lbs/pc	Volume ft³/pc	ND	D	L1	H1	H
27NGEAP32	B	9	-	0.0484	1" => 32mm	3.5	2	3.14	4.89
27NGEAP40	B	11	-	0.0484	1 1/4" => 40 mm	3.5	2	3.14	4.89
27NGEAP50	B	11/17	1.814	0.0998	1 1/2" => 50mm	4.5	2.5	3.94	6.19
27NGEAP63	B	11/17	1.922	0.0998	2" => 63mm	4.5	2.5	3.94	6.19
27NGEAP75	A	11/17	4.156	0.1948	2 1/2" => 75 mm	6.62	3	4.37	7.68
27NGEAP90	A	11/17	4.517	0.2059	3" => 90mm	6.62	3	4.81	8.12
27NGEAP110	A	11/17	-	0.4537	3 1/2" => 110mm	8.62	4	6.24	10.55
27NGEAP125	A	11/17	-	0.4631	4" => 125 mm	8.62	4	6.46	10.77
27NGEAP160	A	11/17	16.312	0.84	6" => 160mm	10.75	4	7.18	12.56
27NGEAP200	A	11/17	-	1.4281	8" => 200mm	12.75	4.5	8.8	15.18



ITEM:

NGEAP

DESC: 90° ELECTROFUSION PREINSULATED ELBOW

C:\Vault_Templ\Disegni\Schede Tecniche\Niron ALL PRO\Preinsulated
electrofusion fittings\AP00053.dwg

All dimensions have to be considered in inches with 5% tolerance if not otherwise mentioned excluding values as per standard ASTM F2389



DRAWING No:

AP00053

SHEET OF REV.

1 1 -4