


CODE	Weight lbs/pc	Volume ft^3/pc	ND	D	S	L1	L	H1	H
27NC45SP6311MM	-	0.204	2" => 63 mm	4.5	0.23	0.59	6.85	4.25	8.85
27NC45SP7511MM	-	0.4542	2 1/2" => 75 mm	6.63	0.27	0.59	9.19	5	10.88
27NC45SP9011MM	-	0.4542	3" => 90 mm	6.63	0.32	0.59	9.19	5	10.88
27NC45SP11011MM	-	0.7729	3 1/2" => 110 mm	8.63	0.39	0.59	11.25	5.5	12.44
27NC45SP12511MM	-	0.7729	4" => 125 mm	8.63	0.45	0.59	11.25	5.5	12.44
27NC45SP16011MM	-	1.2263	6" => 160 mm	10.75	0.57	0.59	13.42	6	14.04
27NC45SP20011MM	-	1.7956	8" => 200 mm	12.75	0.72	0.59	15.48	6.5	15.6
27NC45SP25011MM	-	2.5526	10" => 250 mm	14	0.89	0.59	17.25	7.5	17.75
27NC45SP31511MM	-	4.0911	12" => 315 mm	16	1.13	0.59	20.02	9	21.02
27NC45SP45011MM	-	11.3001	18" => 450 mm	24.8	1.61	0.59	29.16	11.3	28.06

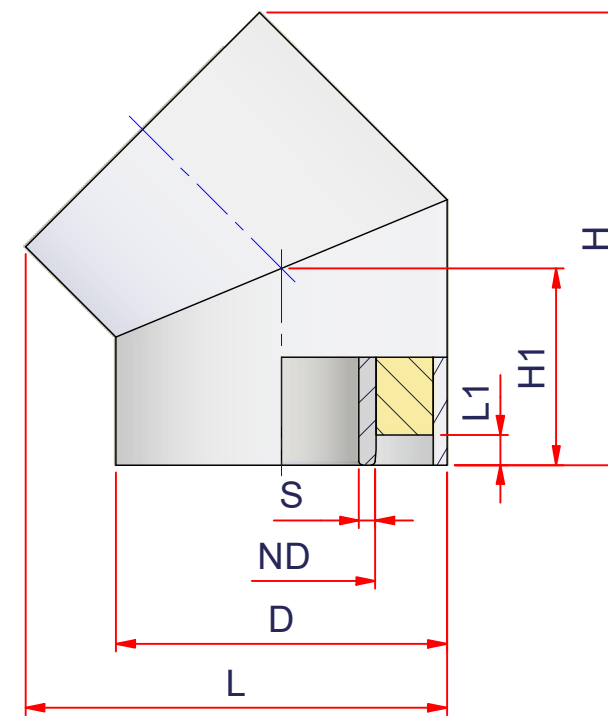

ITEM:
NC45SP_11MM

C:\Vault_Templ\Disegni\Schede Tecniche\Niron ALL PRO\Preinsulated butt fusion fittings\AP00035.dwg

DESC: 45° PREINSULATED ELBOW SDR11



DRAWING No:

AP00035

SHEET OF REV.

1 1 -2

www.nupiamericas.com - info@nupiamericas.com

All dimensions have to be considered in inches with 5% tolerance if not otherwise mentioned excluding values as per standard ASTM F2389