




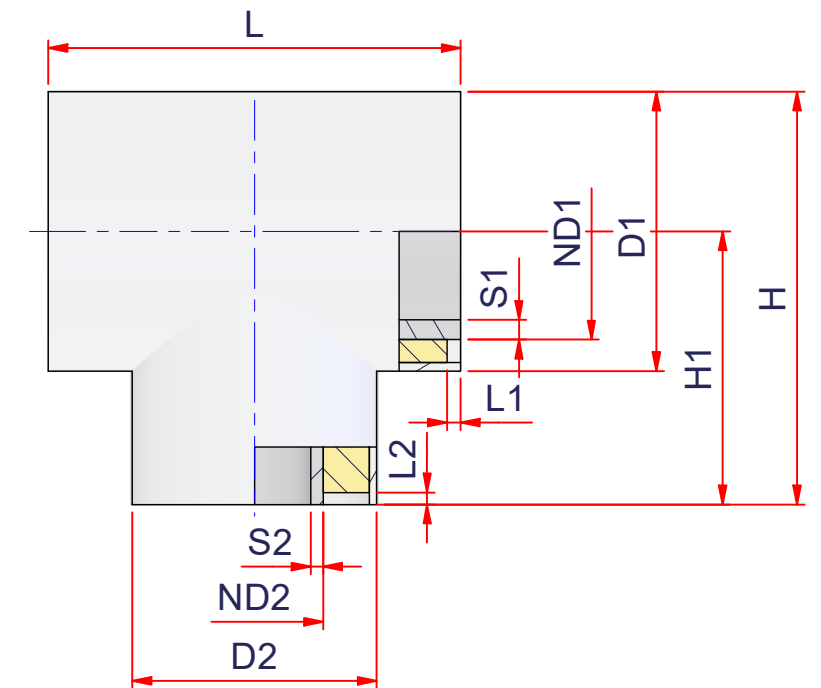


CODE	Weight lbs/pc	Volume ft^3/pc	ND1	ND2	D1	D2	S1	S2	L1	L2	L	H1	H
27NTRSP75637511MM	-	0.3946	2 1/2" => 75 mm	2" => 63 mm	6.62	4.5	0.27	0.23	0.59	0.59	10.5	6.5	9.81
27NTRSP90639011MM	-	0.3946	3" => 90 mm	2" => 63 mm	6.62	4.5	0.32	0.23	0.59	0.59	10.5	6.5	9.81
27NTRSP90759011MM	-	0.5431	3" => 90 mm	2 1/2" => 75 mm	6.62	6.62	0.32	0.27	0.59	0.59	13.75	7	10.31
27NTRSP1106311011MM	-	0.6186	3 1/2" => 110 mm	2" => 63 mm	8.62	4.50	0.39	0.23	0.59	0.59	10.5	7.5	11.81
27NTRSP1107511011MM	-	0.8444	3 1/2" => 110 mm	2 1/2" => 75 mm	8.62	6.62	0.39	0.27	0.59	0.59	13.75	8	12.31
27NTRSP1109011011MM	-	0.8444	3 1/2" => 110 mm	3" => 90 mm	8.62	6.62	0.39	0.32	0.59	0.59	13.75	8	12.31
27NTRSP1257512511MM	-	0.8444	4" => 125 mm	2 1/2" => 75 mm	8.62	6.62	0.45	0.27	0.59	0.59	13.75	8	12.31
27NTRSP1259012511MM	-	0.8444	4" => 125 mm	3" => 90 mm	8.62	6.62	0.45	0.32	0.59	0.59	13.75	8	12.31
27NTRSP12511012511MM	-	0.9672	4" => 125 mm	3 1/2" => 110 mm	8.62	8.62	0.45	0.39	0.59	0.59	15.75	8	12.31

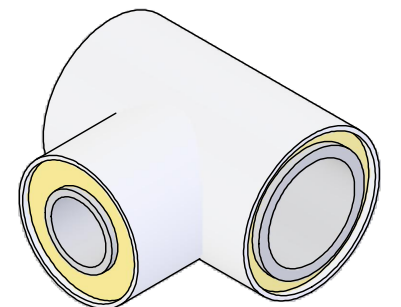

All-Pro™ NIRON nupi AMERICAS	ITEM: NTRSP_11MM	DESC: 90° PREINSULATED REDUCING TEE WITH PP-R JACKET PIPE SDR11		DRAWING No: AP00004	
	C:\Vault_Temp\Disegni\Schede Tecniche\Niron ALL PRO\Preinsulated butt fusion fittings\AP00004.dwg			SHEET OF 1 2	REV. -1
www.nupiamericas.com - info@nupiamericas.com	All dimensions have to be considered in inches with 5% tolerance if not otherwise mentioned excluding values as per standard ASTM F2389				

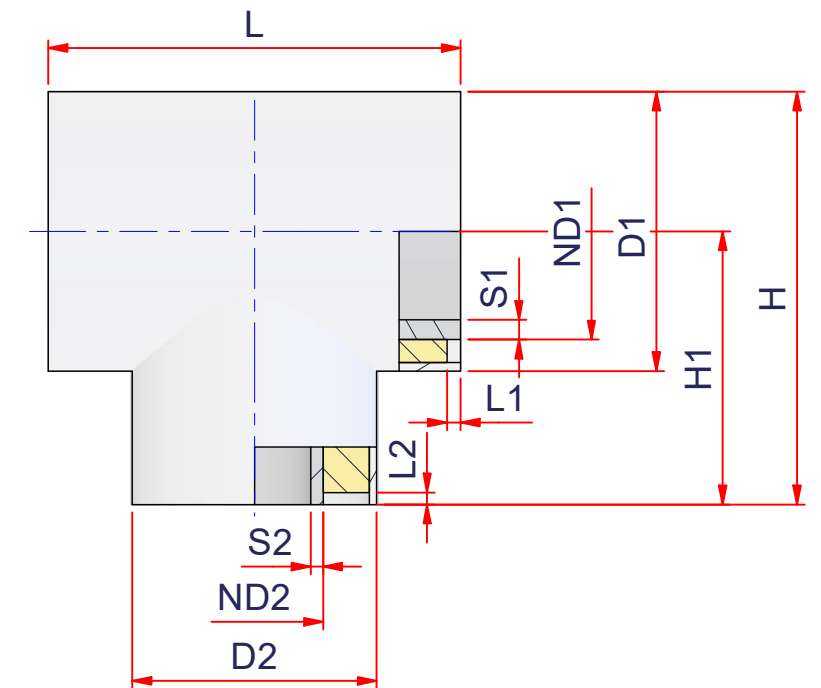

CODE	Weight lbs/pc	Volume ft ³ /pc	ND1	ND2	D1	D2	S1	S2	L1	L2	L	H1	H
27NTRSP1606316011MM	-	0.9063	6" => 160 mm	2" => 63 mm	10.75	4.50	0.57	0.23	0.59	0.59	10.5	8.5	13.88
27NTRSP1607516011MM	-	1.2296	6" => 160 mm	2 1/2" => 75 mm	10.75	6.62	0.57	0.27	0.59	0.59	13.75	9	14.38
27NTRSP1609016011MM	-	1.2296	6" => 160 mm	3" => 90 mm	10.75	6.62	0.57	0.32	0.59	0.59	13.75	9	14.38
27NTRSP16011016011MM	-	1.4085	6" => 160 mm	3 1/2" => 110 mm	10.75	8.62	0.57	0.39	0.59	0.59	15.75	9	14.38
27NTRSP16012516011MM	-	1.4085	6" => 160 mm	4" => 125 mm	10.75	8.62	0.57	0.45	0.59	0.59	15.75	9	14.38
27NTRSP2006320011MM	-	1.2299	8" => 200 mm	2" => 63 mm	12.75	4.50	0.72	0.23	0.59	0.59	10.5	9.5	15.88
27NTRSP2009020011MM	-	1.6613	8" => 200 mm	3" => 90 mm	12.75	6.62	0.72	0.32	0.59	0.59	13.75	10	16.38
27NTRSP20011020011MM	-	1.903	8" => 200 mm	3 1/2" => 110 mm	12.75	8.62	0.72	0.39	0.59	0.59	15.75	10	16.38
27NTRSP20012520011MM	-	1.903	8" => 200 mm	4" => 125 mm	12.75	8.62	0.72	0.45	0.59	0.59	15.75	10	16.38
27NTRSP20016020011MM	-	2.1446	8" => 200 mm	6" => 160 mm	12.75	10.75	0.72	0.57	0.59	0.59	17.75	10	16.38
27NTRSP2509025011MM	-	1.9495	10" => 250 mm	3" => 90 mm	14.00	6.62	0.89	0.32	0.59	0.59	13.75	10.5	17.5
27NTRSP25011025011MM	-	2.2331	10" => 250 mm	3 1/2" => 110 mm	14.00	8.62	0.89	0.39	0.59	0.59	15.75	10.5	17.5
27NTRSP25012525011MM	-	2.2331	10" => 250 mm	4" => 125 mm	14.00	8.62	0.89	0.45	0.59	0.59	15.75	10.5	17.5
27NTRSP25016025011MM	-	2.5166	10" => 250 mm	6" => 160 mm	14.00	10.75	0.89	0.57	0.59	0.59	17.75	10.5	17.5
27NTRSP25020025011MM	-	2.8002	10" => 250 mm	8" => 200 mm	14.00	12.75	0.89	0.72	0.59	0.59	19.75	10.5	17.5
27NTRSP31520031511MM	-	3.566	12" => 315 mm	8" => 200 mm	16.00	12.75	1.13	0.72	0.59	0.59	19.75	11.5	19.5
27NTRSP31525031511MM	-	3.7917	12" => 315 mm	10" => 250 mm	16.00	14.00	1.13	0.89	0.59	0.59	21	11.5	19.5

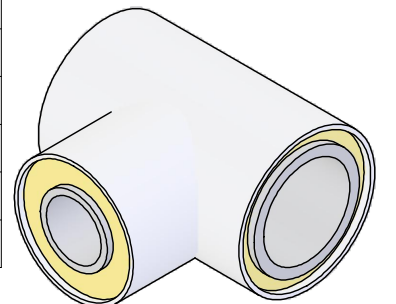

All-Pro NIRON nupi AMERICAS	ITEM: NTRSP_11MM	DESC: 90° PREINSULATED REDUCING TEE WITH PP-R JACKET PIPE SDR11		DRAWING No: AP00004	
	C:\Vault_Temp\Disegni\Schede Tecniche\Niron ALL PRO\Preinsulated butt fusion fittings\AP00004.dwg			SHEET OF 2 2	REV. -1
www.nupiamericas.com - info@nupiamericas.com		All dimensions have to be considered in inches with 5% tolerance if not otherwise mentioned excluding values as per standard ASTM F2389			