


CODE	Weight lbs/pc	Volume ft ³ /pc	ND	D	S	L1	L	H1	H
27NTSP6311MM	-	0.2051	2" => 63 mm	4.5	0.23	0.59	10.5	5.25	7.5
27NTSP7511MM	-	0.5431	2 1/2" => 75 mm	6.62	0.27	0.59	13.75	7	10.31
27NTSP9011MM	-	0.5431	3" => 90 mm	6.62	0.32	0.59	13.75	7	10.31
27NTSP11011MM	-	0.9672	3 1/2" => 110 mm	8.62	0.39	0.59	15.75	8	12.31
27NTSP12511MM	-	0.9672	4" => 125 mm	8.62	0.45	0.59	15.75	8	12.31
27NTSP16011MM	-	1.5873	6" => 160 mm	10.75	0.57	0.59	17.75	9	14.38
27NTSP20011MM	-	2.3862	8" => 200 mm	12.75	0.72	0.59	19.75	10	16.38
27NTSP25011MM	-	2.9774	10" => 250 mm	14	0.89	0.59	21	10.5	17.5
27NTSP31511MM	-	4.4444	12" => 315 mm	16	1.13	0.59	24	12	20



ITEM:
NTSP_11MM

DESC: 90° PREINSULATED TEE WITH PP-R JACKET PIPE SDR11

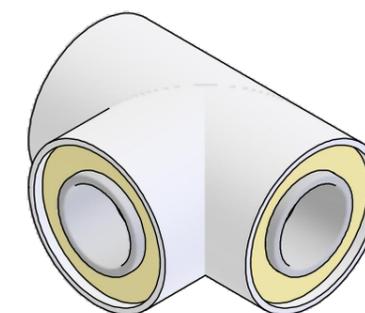

DRAWING No:
AP00008

SHEET OF REV.
1 1 -1

C:\Vault_Templ\Disegni\Schede Tecniche\Niron ALL PRO\Preinsulated butt fusion fittings\AP00008.dwg

www.nupiamericas.com - info@nupiamericas.com

All dimensions have to be considered in inches with 5% tolerance if not otherwise mentioned excluding values as per standard ASTM F2389