


SUBMITTAL DATA SHEET

NI_AP_IN_0011.docx
Rev. -0 of 25/05/2022



NIRON CLIMA ALLPRO ELECTROFUSION FITTINGS PREINSULATED COUPLING



ITEM: 27NMEAP_11
SIZE RANGE: 3" (90 mm) ÷ 12" (315 mm)
SDR: 11
FUSION RANGE: For Electrofusion – SDR 11 and up
MATERIAL: PP-RCT + PUF + PP-R jacket
COLOR: Grey (carrier pipe) + Grey with white outer layer (jacket pipe)
WELDING SYSTEM:  

INSTALLATION INSTRUCTIONS:

In accordance with DVS 2207, ASTM D2657 and NUPI AllPro Niron Catalog/Price Sheet


LISTINGS:

uNSF-14; ICC-ES; IAPMO


STANDARDS:

ANS/NSF 14; ASTM F2389; CSA B137.11; CAN/ULC S102.2

MAXIMUM OPERATING PRESSURE:

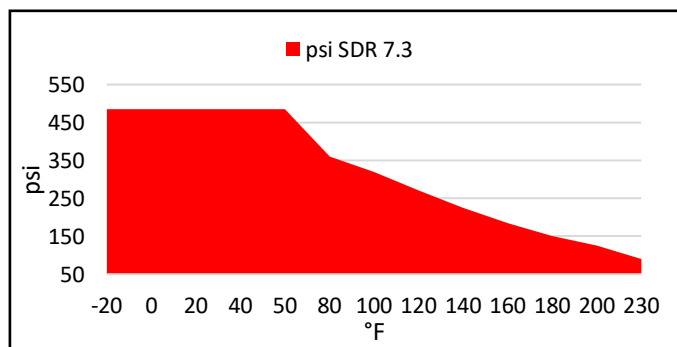

MINIMUM INSULATION THICKNESS PER ASHRAE STANDARD 90.1:

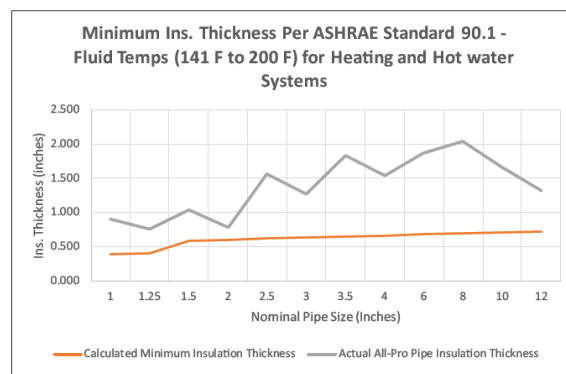

LINEAR EXPANTION RATE:

0.23 in /10°F/100 ft

For code or standard question pertaining to NIRON CLIMA AllPro Pipe and Fittings, contact Nupi Americas.

PRODUCT INFORMATION AND APPLICATION USE:


Niron AllPro preinsulated couplings are manufactured with Niron Clima PP-RCT carrier components that are housed within an IPS Sch. 40 jacket that is extruded with a 30 year U.V. resistant white PP-RCT external layer. The fittings are superinsulated with highly efficient closed cell polyurethane foam (PUF) insulation which exceeds the required thickness for the ASHRAE 90.1 Energy Code in all sizes. This style of coupling is intended to allow joining by the AllPro EF method.



Nupi Americas, Inc.
314 Commerce Parkway
Early Branch, SC 29916
Phone: 813-398-3579
Fax: 813-398-3639
Mail: info@nupiamericas.com
Website: www.nupiamericas.com

SUBMITTAL DATA SHEET

NI_AP_IN_0011.docx
Rev. -0 of 25/05/2022

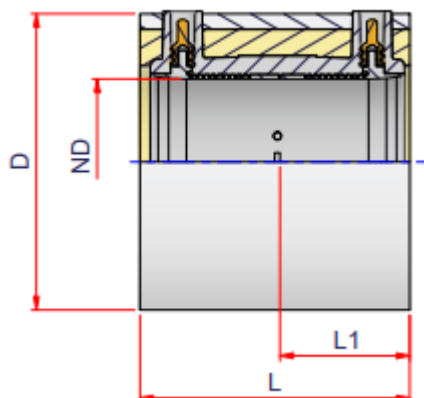

CODE	Weldable SDR	Weight lbs/pc	Volume ft ³ /pc	ND	D	L1	L
27NMEAP9011	11/17	2.723	0.1542	3" => 90 mm	6.62	3	6.08
27NMEAP11011	11/17	5.388	0.3474	3 1/2" => 110 mm	8.62	4	8.08
27NMEAP12511	11/17	5.58	0.3474	4" => 125 mm	8.62	4	8.08
27NMEAP16011	11/17	8.684	0.5353	6" => 160 mm	10.7	4	8.08
27NMEAP20011	11/17	12.515	0.8542	8" => 200 mm	12.75	4.5	9.08
27NMEAP25011	11/17	17.97	1.1433	10" => 250 mm	14.0	5	10.08
27NMEAP31511	11/17	28.512	1.7231	12" => 315 mm	15.7	6	12.08

MANUFACTURER' S WARRANTY:

Thirty (30) Years from the date of sale upon successful completion of pressure test of the piping system (refer to published warranty for complete details).

NOTE:

* More information can be found on AIPro NIRON TECHNICAL CATALOGUE

*** In order for Niron pipe and fittings to meet E-84 and/or CAN/ULC S102.2 for installation in a plenum application, it must be covered with a minimum of 1" or greater E-84 fiberglass insulation

**** Technical Data may undergo dimensional changes, check revision at the top



Nupi Americas, Inc.
314 Commerce Parkway
Early Branch, SC 29916
Phone: 813-398-3579
Fax: 813-398-3639
Mail: info@nupiamericas.com
Website: www.nupiamericas.com