

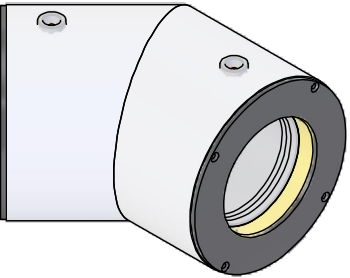
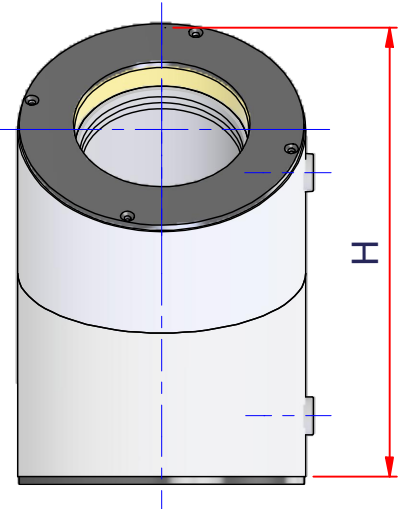
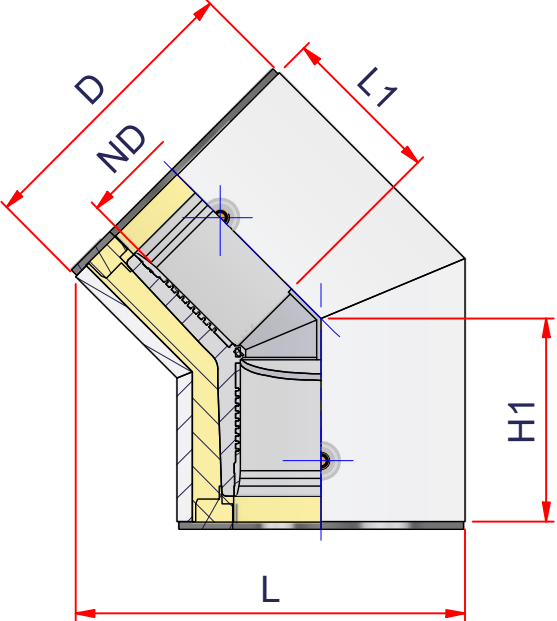
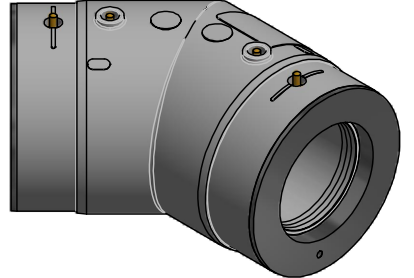


TYPE A

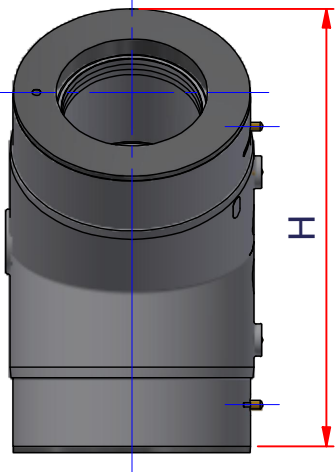

TYPE B

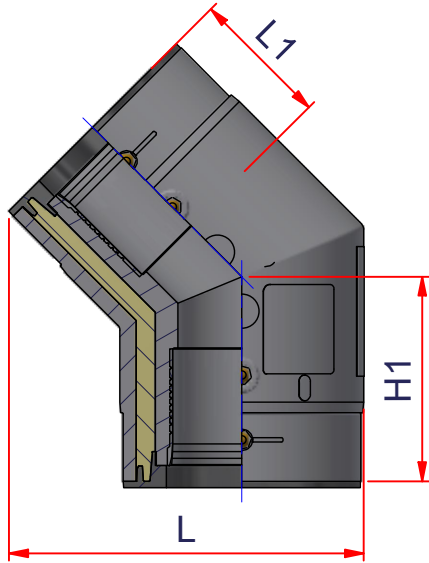

CODE	TYPE	Weldable SDR	Weight lbs/pc	Volume ft³/pc	ND	D	L1	L	H1	H
27NCEAP32	B	9	-	0.0715	1" => 32 mm	3.5	2	5.31	3.15	6.65
27NCEAP40	B	11	-	0.0715	1 1/4" => 40 mm	3.5	2	5.31	3.15	6.65
27NCEAP50	B	11	1.695	0.1396	1 1/2" => 50 mm	4.45	2.5	6.54	3.86	8.29
27NCEAP63	B	11/17	1.976	0.1396	2" => 63 mm	4.45	2.5	6.54	3.86	8.29
27NCEAP75	A	11/17	-	0.2756	2 1/2" => 75 mm	6.62	3	8.27	3.74	8.7
27NCEAP90	A	11/17	3.717	0.2979	3" => 90 mm	6.62	3	8.47	4.02	9.18
27NCEAP110	A	11/17	6.12	0.6346	3 1/2" => 110 mm	8.62	4	10.91	5.06	11.66
27NCEAP125	A	11/17	8.362	0.6346	4" => 125 mm	8.62	4	10.91	5.06	11.66
27NCEAP160	A	11/17	12.024	1.097	6" => 160 mm	10.75	4	13.14	5.65	13.42
27NCEAP200	A	11/17	22.964	1.9107	8" => 200 mm	12.75	4.5	15.79	6.98	16.4



ITEM:

NCEAP

DESC: 45° ELECTROFUSION PREINSULATED ELBOW

C:\Vault_Templ\Disegni\Schede Tecniche\Niron ALL PRO\Preinsulated electrofusion fittings\AP00052.dwg



DRAWING No:

AP00052

SHEET OF REV.

1 1 -4