

TECHNICAL DATA

REVERSIBLE VIBRATORY PLATES

BPR 55/65 D, BPR 60/65, BPR 60/65 D



Maximum longevity

Full protection hood - engine and components protected all around



Precise and save to operate

Comfortable control lever



Higher quality, lower costs

ECONOMIZER - The compaction display (optional)

Shipping dimensions in cub.yd


BPR 55/65 D	1.185
BPR 60/65	1.127
BPR 60/65 D	1.185

Standard Equipment

- Engine protection hood
- Comfortable control lever
- Low vibration steering rod
- Height adjustable steering rod
- Steering rod lockable in transport and working position
- Vibration and throttle regulation on the steering rod
- Highly wear-resistant, powder-coated base plate
- Automatic decompression
- Multi-functional, foldable single-point lifting facility
- Extension plates (650mm)
- Electric starter
- Recoil starter
- Back-up drive protection
- Warning signal at low oil level (BPR55/65D)
- 3-2-1 Warranty
- Hour meter

Optional Equipment

- ECONOMIZER (+5kg)
- Tool kit
- Special painting
- Plastic mat
- Extension plates (550/750mm)
- Service Kit
- US Version EPA 4 NRTC (BPR60/65D)
- TOUGH WARRANTY

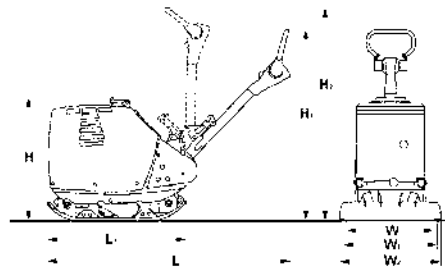

Dimensions in inch

	H	H1	H2	L	L1	W	W1	W2
BPR 55/65 D	32.3	38.6	53.1	66.9	35.4	17.7	25.6	29.5
BPR 60/65	30.7	38.6	53.1	66.9	35.4	17.7	25.6	29.5
BPR 60/65 D	32.3	38.6	53.1	66.9	35.4	17.7	25.6	29.5

Technical Data

		BOMAG BPR 55/65 D	BOMAG BPR 60/65	BOMAG BPR 60/65 D
Weights				
Operating weight CECE (W)	lb	959	882	970
Operating weight CECE (W1)	lb	1,003	926	1,014
Operating weight CECE (W2)	lb	1,027	950	1,038
Basic weight	lb	992	915	1,003
Dimensions				
Basic working width	in	25.6	25.6	25.6
Working width without extension bars (W)	in	17.7	17.7	17.7
Lowest passing height	in	32.3	30.7	32.3
Min. height w. steering in top position	in	38.6	38.6	38.6
Max. height w. steering in top position	in	48.0	48.0	48.0
Driving Characteristics				
Working speed, max.	ft/min	91.9	91.9	91.9
Max. gradeability (dep. on soil con.)	%	35	35	35
Drive				
Engine manufacturer		Kohler	Honda	Hatz
Type		KD 15 440	GX 390	1B40
Emission stage		Stage V	CARB PHASE 3	Stage V
Cooling	air	air	air	air
Number of cylinders		1	1	1
Performance SAE J 1349	hp	6.8	8.7	6.7
Performance ISO 3046	kW	9.1	11.7	9.0
Speed	rpm	3,000	3,600	3,000
Drive system		mech.	mech.	mech.
Fuel		Diesel	Gasoline	Diesel
Fuel comsump. aver. during operation	gal/h	0.4	0.9	0.4
Exciter system				
Frequency	vpm	3,960	4,080	4,080
Centrifugal force	lb	12,365	13,489	13,489
Amplitude	in	0.073	0.077	0.077
Capacities				
Fuel	gal	1.3	1.6	1.3

Technical modifications reserved. Machines may be shown with options.



PRUS 692 83 010

250919 Sa03

BOMAG Americas, Inc.
 125 Blue Granite Parkway
 Ridgeway, SC 29130
 USA
 Tel. +1 803 3370700
 Fax +1 803 3370800
 www.bomag.com/us

