



BPR25/40 BPR25/40D



The Vulcolan mat helps avoid damage to paving stone surfaces.

Technical Specifications


BPR25/40 BPR25/40D

Shipping dimensions

in cubic feet (m³)

BPR25/40 22 (0.624)

BPR25/40D 22 (0.624)

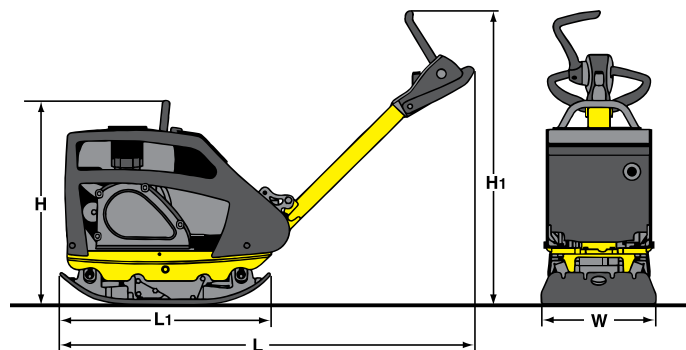

Standard Equipment

- ☒ Hydraulic travel lever adjustment
- ☒ Vibration dampened steering rod
- ☒ Height adjustable steering rod
- ☒ Steering rod lockable in transport and working position
- ☒ Vibration and throttle regulation on the steering rod
- ☒ Highly wear resistant base plate with reinforced edges
- ☒ Fully protected V-belt
- ☒ Reinforced centrifugal clutch
- ☒ Automatically adjusting v-belt pulley
- ☒ Semi-automatic decompression (BPR25/40D)
- ☒ Large-volume dry air filter with cyclone-type precleaner (BPR25/40)
- ☒ Maintenance-free transistor ignition (BPR25/40)
- ☒ Recoil starter

Optional Equipment

- ☐ Vulcolan mat
- ☐ Transport Wheels
- ☐ Service Kit
- ☐ Water Kit

Dimensions
inches (mm)

	H	H ₁	L	L ₁	W
BPR25/40	26.0 (660)	34.3 (870)	57.5 (1460)	25.6 (650)	15.7 (400)
BPR25/40D	29.1 (740)	34.3 (870)	57.5 (1460)	25.6 (650)	15.7 (400)

Technical modifications reserved. Machine may be shown with options.

