


# NIRON CLIMA SOCKET FUSION FITTING

## INSTABRANCH WELDING SOCKLET W/HEXAGONAL NPT LEAD

### FREE BRASS FEMALE OUTLET

|              |                                                                                                                                                                                                                               |
|--------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ITEM         | 27NGSFC_NPT                                                                                                                                                                                                                   |
| SIZE RANGE   | 1¼" x ½" NPT (40 mm x ½" NPT) ÷ 24" x 2" NPT (630 mm x 2" NPT)                                                                                                                                                                |
| SDR          | 7.4                                                                                                                                                                                                                           |
| FUSION RANGE | For Socket Fusion – SDR7.4 and up                                                                                                                                                                                             |
| MATERIAL     | Material shall be β-crystalline PP-RCT and solid grey in color having a cell classification of PP0220B56832 according to ASTM F4101 and shall be coextruded with a POWERCORE middle layer containing added fiberglass + Brass |
| COLOR        | Steel Grey                                                                                                                                                                                                                    |



#### INSTALLATION INSTRUCTIONS

Socket fusion - Socket Fusion in accordance with DVS 2207, ASTM D2657 and NUPI Niron Installation Manual


#### LISTINGS:

NSF PW; ANSI/NSF 14; ANSI/NSF 61; ANSI/NSF 51; UPC; IPC; IAPMO; ICC-ES; CAN/UCL S102; CAN/UCL S115\*

#### STANDARDS:

ANSI/NSF 14; ANSI/NSF 61; ASTM F2389; ASTM F2023; CSA B137,11; ASTM E-84\*\*\*\*; CAN/UCL S102\*\*\*\*; NSF 51; ISO 15874

#### MAXIMUM OPERATING PRESSURE

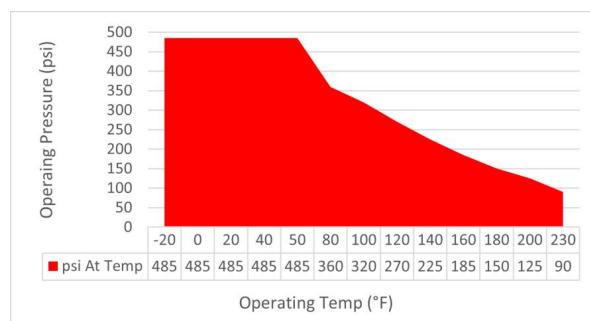

For code or standard question pertaining to NIRON CLIMA Pipe and Fittings, contact Nupi Americas.

#### PRODUCT INFORMATION AND APPLICATION USE

Niron Socket Fusion Fittings are designed to be joined by means of heat element socket fusion in accordance with the above listed installation instructions. Fittings are manufactured with imbedded sockets on each side which are of a tapered interference fit. The dimensions of the fittings and sockets are in accordance with the requirements of ASTM F2389. The fittings are designed with sufficient thickness to exceed the pressure ratings of the thickest NIRON commercially available pipe and can be used to join to a Niron pipe of any thickness. Fittings are unitary and injection molded and are solid grey in color.

#### MANUFACTURER'S WARRANTY

Thirty (30) Years from the date of sale upon successful completion of pressure test of the piping system (refer to published warranty for complete details).

#### NOTE:

\* For unexposed service only with CAN/UCL S115 listed 1" thick fiberglass insulation.


\*\* More information can be found on NIRON TECHNICAL CATALOGUE.

\*\*\* Weld Depth (WD) is the insertion depth of the pipe for socket fusing


\*\*\*\* For Niron pipe and fittings to meet E-84 and/or CAN/UCL S102.2 for installation in a plenum application, it must be covered with a minimum of 1" or greater E-84 fiberglass insulation.

\*\*\*\*\* Technical Data may undergo dimensional changes, check revision at the top.

\*\*\*\*\* The actual pressure ratings of Niron PP-RCT socket fusion fittings meet or exceed the pressures indicated in the graph, which are for SDR 7.4 PP-RCT pipe.

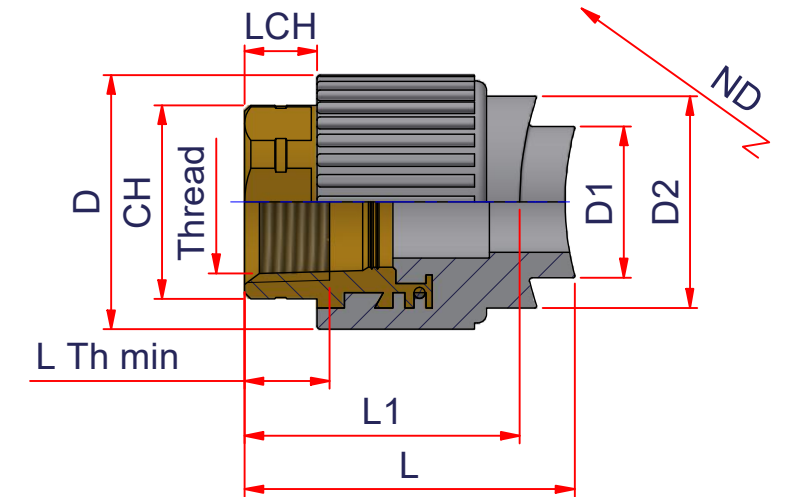

| CODE                 | TYPE | Weight<br>lbs/pc | Volume<br>ft <sup>3</sup> /pc | ND                                              | Thread   | L Th. min | D1   | D2   | D    | L1   | L    | CH   | LCH  |
|----------------------|------|------------------|-------------------------------|-------------------------------------------------|----------|-----------|------|------|------|------|------|------|------|
| 27NGSFC124050NPT     | A    | 0.233            | 0.0027                        | 1 1/4" => 40 mm<br>1 1/2" => 50 mm              | 1/2" NPT | 0.53      | 0.98 | 1.38 | 1.46 | 1.24 | 2.2  | 0.98 | 0.43 |
| 27NGSFC126375NPT     | A    | 0.233            | 0.0026                        | 2" => 63 mm<br>2 1/2" => 75 mm                  | 1/2" NPT | 0.53      | 0.98 | 1.38 | 1.46 | 1.24 | 2.08 | 0.98 | 0.43 |
| 27NGSFC1290110125NPT | A    | 0.22             | 0.0025                        | 3" => 90 mm<br>3 1/2" => 110 mm<br>4" => 125 mm | 1/2" NPT | 0.53      | 0.98 | 1.38 | 1.46 | 1.24 | 2.04 | 0.98 | 0.43 |
| 27NGSFC12160200NPT   | A    | 0.227            | 0.0025                        | 6" => 160 mm<br>8" => 200 mm                    | 1/2" NPT | 0.53      | 0.98 | 1.38 | 1.46 | 1.24 | 2    | 0.98 | 0.43 |
| 27NGSFC12250315NPT   | A    | 0.22             | 0.0025                        | 10" => 250 mm<br>12" => 315 mm                  | 1/2" NPT | 0.53      | 0.98 | 1.38 | 1.46 | 1.24 | 2    | 0.98 | 0.43 |
| 27NGSFC12355630NPT   | A    | 0.227            | 0.0025                        | 14" => 355 mm<br>÷ 24" => 630 mm                | 1/2" NPT | 0.53      | 0.98 | 1.38 | 1.46 | 1.24 | 2    | 0.98 | 0.43 |

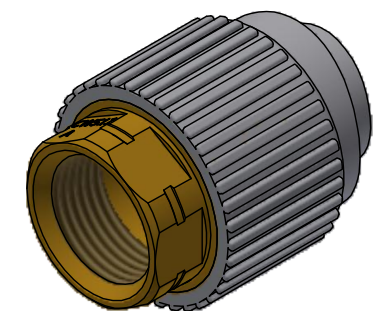

**NIRON**

ITEM:  
NGSFC\_NPT

C:\Vault\_Temp\Disegni\Schede Tecniche\00\_Inches\Niron Grey\Socket  
Fusion Fittings\NI10501.dwg

DESC: FEMALE SIDE FUSION WELDING SADDLE W/NPT  
LEAD FREE BRASS



DRAWING No:


NI10501

SHEET OF REV.


1 4 -4

www.nupiamericas.com - info@nupiamericas.com

All dimensions have to be considered in inches with 5% tolerance if not otherwise mentioned excluding values as per standard ASTM F2389

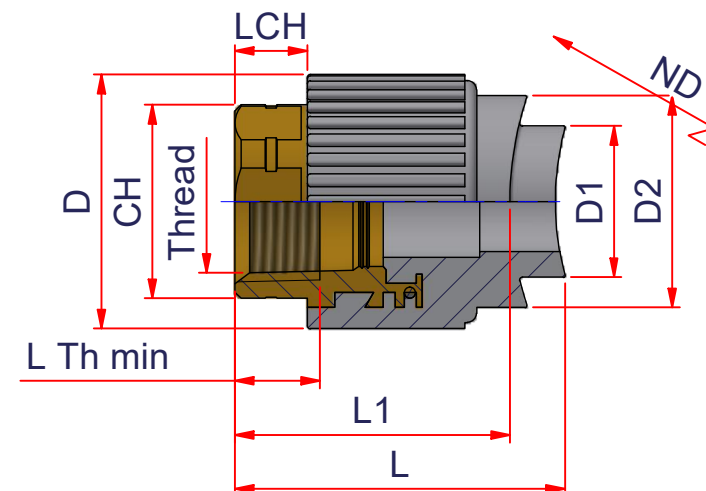

| CODE                 | TYPE | Weight<br>lbs/pc | Volume<br>ft³/pc | ND                                              | Thread   | L Th. min | D1   | D2   | D    | L1   | L    | CH   | LCH  |
|----------------------|------|------------------|------------------|-------------------------------------------------|----------|-----------|------|------|------|------|------|------|------|
| 27NGSFC344050NPT     | A    | 0.276            | 0.0037           | 1 1/4" => 40 mm<br>1 1/2" => 50 mm              | 3/4" NPT | 0.55      | 0.98 | 1.38 | 1.65 | 1.32 | 2.32 | 1.18 | 0.47 |
| 27NGSFC346375NPT     | A    | 0.273            | 0.0035           | 2" => 63 mm<br>2 1/2" => 75 mm                  | 3/4" NPT | 0.55      | 0.98 | 1.38 | 1.65 | 1.32 | 2.2  | 1.18 | 0.47 |
| 27NGSFC3490110125NPT | A    | 0.277            | 0.0034           | 3" => 90 mm<br>3 1/2" => 110 mm<br>4" => 125 mm | 3/4" NPT | 0.55      | 0.98 | 1.38 | 1.65 | 1.32 | 2.16 | 1.19 | 0.48 |
| 27NGSFC34160200NPT   | A    | 0.268            | 0.0033           | 6" => 160 mm<br>8" => 200 mm                    | 3/4" NPT | 0.55      | 0.98 | 1.38 | 1.65 | 1.32 | 2.12 | 1.18 | 0.47 |
| 27NGSFC34250315NPT   | A    | 0.277            | 0.0033           | 10" => 250 mm<br>12" => 315 mm                  | 3/4" NPT | 0.55      | 0.98 | 1.38 | 1.65 | 1.32 | 2.12 | 1.18 | 0.47 |
| 27NGSFC34355630NPT   | A    | 0.269            | 0.0033           | 14" => 355 mm<br>÷ 24" => 630 mm                | 3/4" NPT | 0.55      | 0.98 | 1.38 | 1.65 | 1.32 | 2.12 | 1.18 | 0.47 |
| 27NGSFC016375NPT     | A    | 0.492            | 0.0067           | 2" => 63 mm<br>2 1/2" => 75 mm                  | 1" NPT   | 0.66      | 1.26 | 1.77 | 2.13 | 1.5  | 2.56 | 1.5  | 0.51 |
| 27NGSFC0190110125NPT | A    | 0.484            | 0.0065           | 3" => 90 mm<br>3 1/2" => 110 mm<br>4" => 125 mm | 1" NPT   | 0.66      | 1.26 | 1.77 | 2.13 | 1.5  | 2.48 | 1.5  | 0.51 |
| 27NGSFC01160200NPT   | A    | 0.492            | 0.0064           | 6" => 160 mm<br>8" => 200 mm                    | 1" NPT   | 0.66      | 1.26 | 1.77 | 2.13 | 1.5  | 2.42 | 1.5  | 0.51 |
| 27NGSFC01250315NPT   | A    | 0.485            | 0.0063           | 10" => 250 mm<br>12" => 315 mm                  | 1" NPT   | 0.66      | 1.26 | 1.77 | 2.13 | 1.5  | 2.4  | 1.5  | 0.51 |
| 27NGSFC01355630NPT   | A    | 0.507            | 0.0063           | 14" => 355 mm<br>÷ 24" => 630 mm                | 1" NPT   | 0.66      | 1.26 | 1.77 | 2.13 | 1.5  | 2.4  | 1.5  | 0.51 |

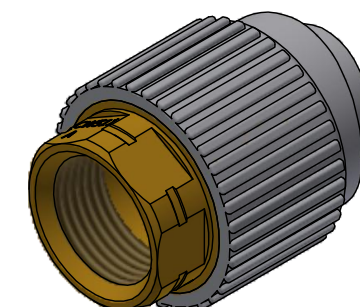

**NIRON**

ITEM:  
NGSFC\_NPT

C:\Vault\_Temp\Disegni\Schede Tecniche\00\_Inches\Niron Grey\Socket  
Fusion Fittings\NI10501.dwg

DESC: FEMALE SIDE FUSION WELDING SADDLE W/NPT  
LEAD FREE BRASS



DRAWING No:


NI10501

SHEET OF REV.


2 4 -4

www.nupiamericas.com - info@nupiamericas.com

All dimensions have to be considered in inches with 5% tolerance if not otherwise mentioned excluding values as per standard ASTM F2389

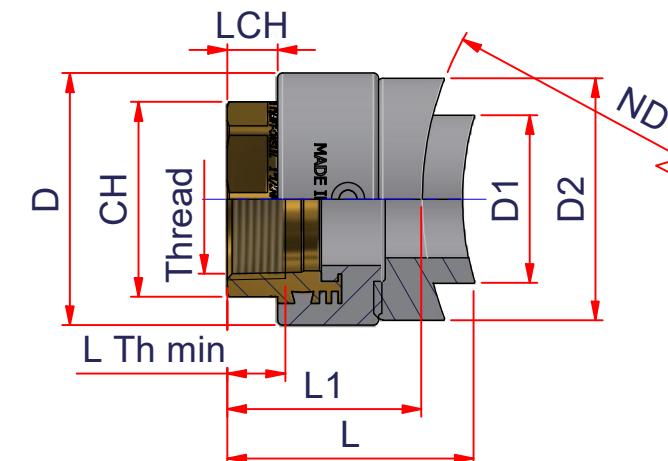

| CODE                | TYPE | Weight<br>lbs/pc | Volume<br>ft³/pc | ND                               | Thread     | L Th. min | D1   | D2   | D    | L1   | L    | CH   | LCH |
|---------------------|------|------------------|------------------|----------------------------------|------------|-----------|------|------|------|------|------|------|-----|
| 27NGSFC11490NPT     | B    | 0.642            | 0.0107           | 3" => 90 mm                      | 1 1/4" NPT | 0.68      | 1.57 | 2.28 | 2.56 | 2.28 | 2.81 | 1.81 | 0.6 |
| 27NGSFC114110NPT    | B    | 0.647            | 0.0112           | 3 1/2" => 110 mm                 | 1 1/4" NPT | 0.68      | 1.57 | 2.28 | 2.56 | 2.28 | 2.96 | 1.81 | 0.6 |
| 27NGSFC114125NPT    | B    | 0.639            | 0.0104           | 4" => 125 mm                     | 1 1/4" NPT | 0.68      | 1.57 | 2.28 | 2.56 | 2.28 | 2.73 | 1.81 | 0.6 |
| 27NGSFC114160200NPT | B    | 0.639            | 0.0103           | 6" => 160 mm<br>8" => 200 mm     | 1 1/4" NPT | 0.68      | 1.57 | 2.28 | 2.56 | 2.28 | 2.71 | 1.81 | 0.6 |
| 27NGSFC114250315NPT | B    | 0.638            | 0.0101           | 10" => 250 mm<br>12" => 315 mm   | 1 1/4" NPT | 0.68      | 1.57 | 2.28 | 2.56 | 2.28 | 2.67 | 1.81 | 0.6 |
| 27NGSFC114355630NPT | B    | 0.638            | 0.0101           | 14" => 355 mm<br>÷ 24" => 630 mm | 1 1/4" NPT | 0.68      | 1.57 | 2.28 | 2.56 | 2.28 | 2.67 | 1.81 | 0.6 |
| 27NGSFC11290NPT     | B    | 0.88             | 0.0168           | 3" => 90 mm                      | 1 1/2" NPT | 0.68      | 1.97 | 2.83 | 2.95 | 2.4  | 3.33 | 2.17 | 0.6 |
| 27NGSFC112110NPT    | B    | 0.874            | 0.0161           | 3 1/2" => 110 mm                 | 1 1/2" NPT | 0.68      | 1.97 | 2.83 | 2.95 | 2.4  | 3.2  | 2.17 | 0.6 |
| 27NGSFC112125NPT    | B    | 1.026            | 0.0159           | 4" => 125 mm                     | 1 1/2" NPT | 0.68      | 1.97 | 2.83 | 2.95 | 2.4  | 3.15 | 2.17 | 0.6 |
| 27NGSFC112160NPT    | B    | 1.023            | 0.0155           | 6" => 160 mm                     | 1 1/2" NPT | 0.68      | 1.97 | 2.83 | 2.95 | 2.4  | 3.08 | 2.17 | 0.6 |
| 27NGSFC112200NPT    | B    | 0.867            | 0.0153           | 8" => 200 mm                     | 1 1/2" NPT | 0.68      | 1.97 | 2.83 | 2.95 | 2.4  | 3.03 | 2.17 | 0.6 |
| 27NGSFC112250NPT    | B    | 0.866            | 0.0151           | 10" => 250 mm                    | 1 1/2" NPT | 0.68      | 1.97 | 2.83 | 2.95 | 2.4  | 3    | 2.17 | 0.6 |
| 27NGSFC112315NPT    | B    | 1.016            | 0.0148           | 12" => 315 mm                    | 1 1/2" NPT | 0.68      | 1.97 | 2.83 | 2.95 | 2.4  | 2.94 | 2.17 | 0.6 |
| 27NGSFC112355450NPT | B    | 0.864            | 0.0149           | 14" => 355 mm<br>÷ 18" => 450 mm | 1 1/2" NPT | 0.68      | 1.97 | 2.83 | 2.95 | 2.4  | 2.96 | 2.17 | 0.6 |
| 27NGSFC112500630NPT | B    | 0.863            | 0.0148           | 20" => 500 mm<br>÷ 24" => 630 mm | 1 1/2" NPT | 0.68      | 1.97 | 2.83 | 2.95 | 2.4  | 2.94 | 2.17 | 0.6 |



**NIRON**

ITEM:  
NGSFC\_NPT

C:\Vault\_Temp\Disegni\Schede Tecniche\00\_Inches\Niron Grey\Socket  
Fusion Fittings\NI10501.dwg

DESC: FEMALE SIDE FUSION WELDING SADDLE W/NPT  
LEAD FREE BRASS



DRAWING No:


NI10501

SHEET OF REV.

3 4 -4

www.nupiamericas.com - info@nupiamericas.com

All dimensions have to be considered in inches with 5% tolerance if not otherwise mentioned excluding values as per standard ASTM F2389

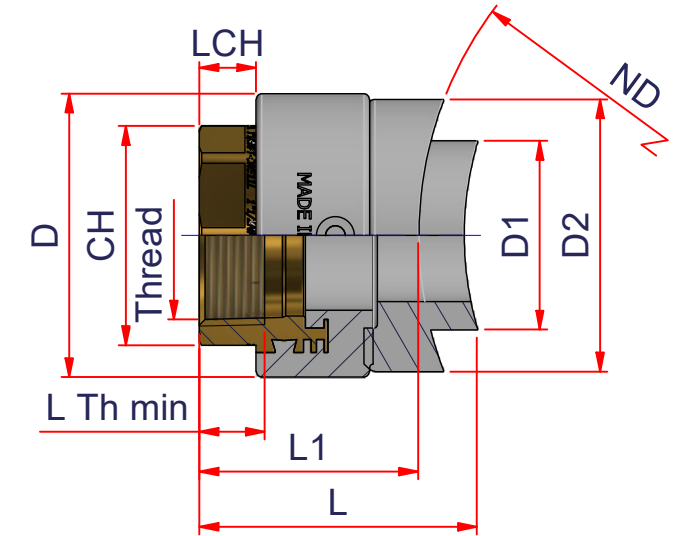

| CODE              | TYPE | Weight<br>lbs/pc | Volume<br>ft³/pc | ND                               | Thread | L Th. min | D1   | D2   | D    | L1   | L    | CH   | LCH  |
|-------------------|------|------------------|------------------|----------------------------------|--------|-----------|------|------|------|------|------|------|------|
| 27NGSFC2110NPT    | B    | 1.179            | 0.0275           | 3 1/2" => 110 mm                 | 2" NPT | 0.7       | 2.48 | 3.54 | 3.62 | 2.64 | 3.62 | 2.56 | 0.79 |
| 27NGSFC2125NPT    | B    | 1.413            | 0.0266           | 4" => 125 mm                     | 2" NPT | 0.7       | 2.48 | 3.54 | 3.62 | 2.64 | 3.51 | 2.56 | 0.79 |
| 27NGSFC2160NPT    | B    | 1.165            | 0.0257           | 6" => 160 mm                     | 2" NPT | 0.7       | 2.48 | 3.54 | 3.62 | 2.64 | 3.39 | 2.56 | 0.79 |
| 27NGSFC2200NPT    | B    | 1.161            | 0.0251           | 8" => 200 mm                     | 2" NPT | 0.7       | 2.48 | 3.54 | 3.62 | 2.64 | 3.31 | 2.56 | 0.79 |
| 27NGSFC2250NPT    | B    | 1.399            | 0.0247           | 10" => 250 mm                    | 2" NPT | 0.7       | 2.48 | 3.54 | 3.62 | 2.64 | 3.26 | 2.56 | 0.79 |
| 27NGSFC2315NPT    | B    | 1.156            | 0.0244           | 12" => 315 mm                    | 2" NPT | 0.7       | 2.48 | 3.54 | 3.62 | 2.64 | 3.22 | 2.56 | 0.79 |
| 27NGSFC2355450NPT | B    | 1.154            | 0.0242           | 14" => 355 mm<br>÷ 18" => 450 mm | 2" NPT | 0.7       | 2.48 | 3.54 | 3.62 | 2.64 | 3.19 | 2.56 | 0.79 |
| 27NGSFC2500630NPT | B    | 1.152            | 0.024            | 20" => 500 mm<br>÷ 24" => 630 mm | 2" NPT | 0.7       | 2.48 | 3.54 | 3.62 | 2.64 | 3.16 | 2.56 | 0.79 |



|                                                                                                                                                                        |                        |                                                                  |                                                                                       |                        |            |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------|------------------------------------------------------------------|---------------------------------------------------------------------------------------|------------------------|------------|
|   | ITEM:<br><br>NGSFC_NPT | DESC: FEMALE SIDE FUSION WELDING SADDLE W/NPT<br>LEAD FREE BRASS |  | DRAWING No:<br>NI10501 |            |
|                                                                                                                                                                        |                        |                                                                  |                                                                                       | SHEET OF<br>4 4        | REV.<br>-4 |

www.nupiamericas.com - info@nupiamericas.com

All dimensions have to be considered in inches with 5% tolerance if not otherwise mentioned excluding values as per standard ASTM F2389