


Port Haven™ Pull-Down Kitchen Faucet

- GT529-TDBG Finish(BG) ☐
- GT529-TDC Finish(C) ☐
- GT529-TDD Finish(D) ☐
- GT529-TDS Finish(S) ☐
- GT529-TDY Finish(Y) ☐



Specifications

- Auto-Align™ Sprayhead Docking
- MagnePfit™ Sprayhead Docking

Features

- 1.8 GPM Flow Rate
- 13.5" Pull-Down Hose Length
- Nylon Braided Hose
- 3 Function Pull-Down Sprayer (Spray, Stream, and Hydroblade™)
- Auto-Align™ Sprayhead Docking
- MagnePfit™ Sprayhead Docking
- 36 in Nylon Flex-Line Supply Lines
- Forward Handle Operation
- 360° Rotating Spout
- High Arc Spout
- Optional Soap Dispenser Available, Order KSD-SRD* Separately
- Optional Deckplate Available, Order 961-254* Separately
- Convert to LEED Requirements with Separate Insert: Low Flow Regulator 1.5 GPM (941-683) and 1.0 GPM (941-444)
- Pforever Seal Ceramic Disc Valve
- Pforever Warranty®


Code Compliance

Pfister products are designed and manufactured in compliance with the following standards and codes:

- IAPMO Certified to ASME A112.18.1/CSA B125
- Certified to NSF 61/9 Annex G (Low lead)
- CALGreen Compliant
- CEC Compliant
- ADA Compliant-ANSI A117.1 (Lever handles only)
- ASME A112.18.3 (Backflow Prevention)



Dimensions

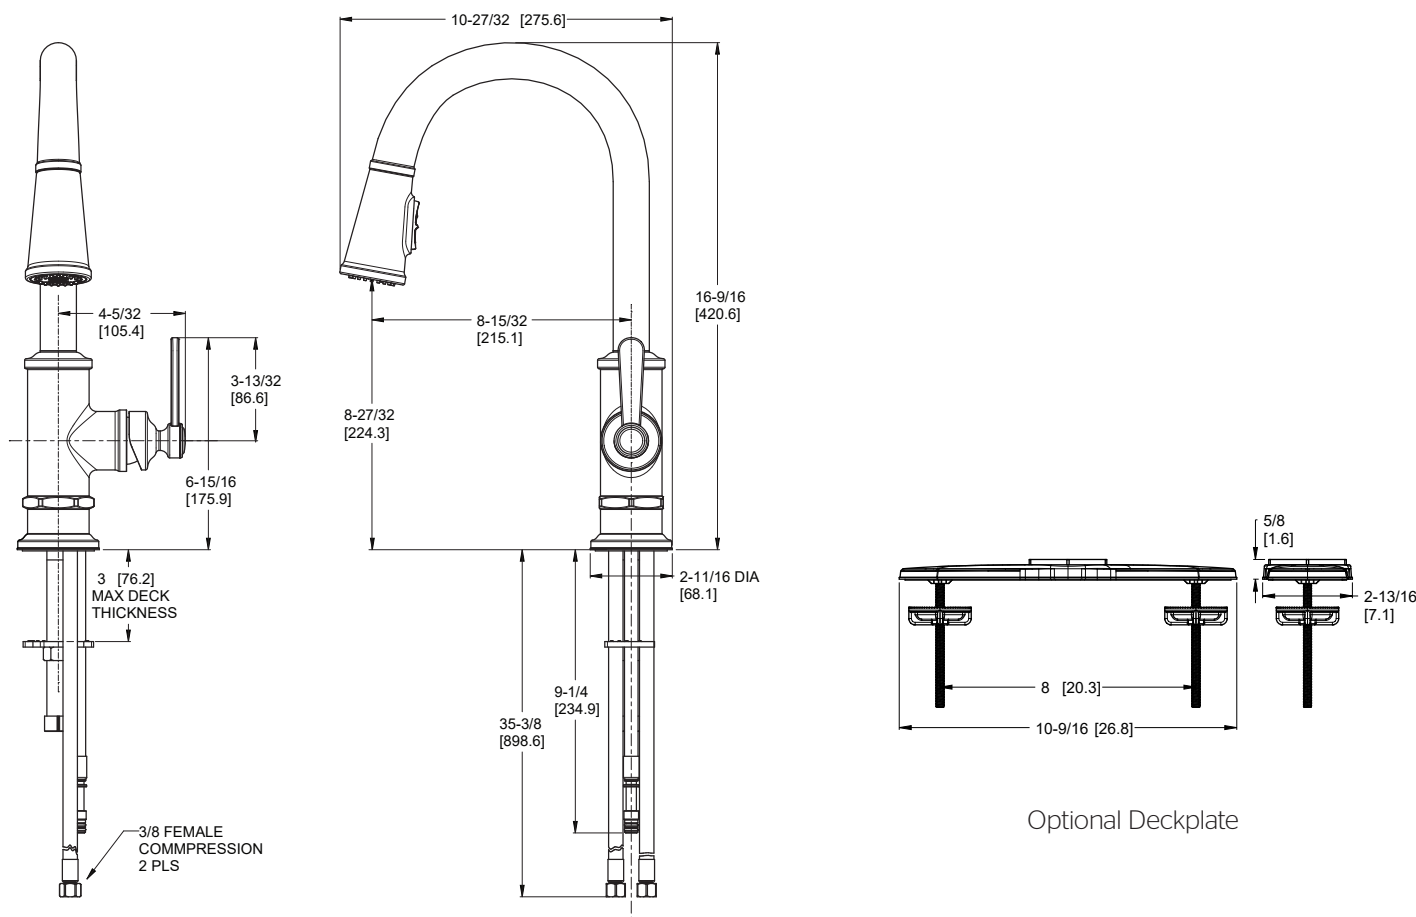

Ø1-3/8 Min to Ø1-1/2 Max. Deck Hole Openings