

Specifications

PFXE200CP

Lubec Commercial Sensor Lavatory Faucet



Product Features

- Touch-free deck-mounted electronic faucet
- Activated by concealed sensor in spout
- Solid one-piece brass body
- Cold or premixed water
- Choose your power (9V battery or 110V plug). Battery box and transformer are included (batteries not included)
- Filter included
- External latching solenoid valve
- Low battery indicator
- Adjustable sensor settings: Sensor range, security time, delay in, delay out, on-off, factory reset. Remote control required - sold separately. Factory settings will suffice for most applications and users. In the rare case that custom settings are desired, the optional remote control indicated below is required
- The faucet is automatically activated when the user places their hands in the sensor range and stops when the user removes their hands from the sensor range



PFXE200CP

Product Specifications

- Vandal-resistant aerator
- Power supply options: 6x1.5V batteries or 9V transformer (Battery box and 9V transformer included. Batteries not included.)
- Operating pressure: 0.5-8.0 bar/7.0-116.0 psi
- Water supply: Cold or premixed water
- Water saving options: 0.5 gpm (default), 0.35 gpm (OBPF508510066)
- Water temperature: 70°C maximum
- Security time: Auto shutoff after 90 seconds, adjustable by remote control
- Sensor: Infrared convergence-type proximity sensor


Optional Parts

OBPF107270290	Deck plate
OBPF508510066	0.35 gpm aerator
PFXEREMOTE	Remote control

Warranty and Codes

This product comes complete with installation, operating, care and maintenance instructions. This PROFLO faucet carries Consumer and Industrial/Commercial 1-year limited warranty. This product meets ANSI: A112.18.1M. *Compliant with lead content requirements of US Senate Bill S.3874

FLOW RATE VS PRESSURE

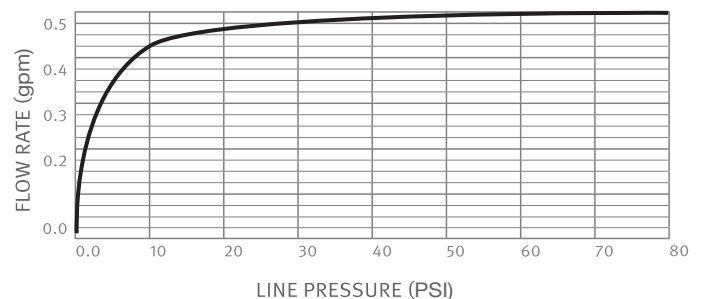

This graph applies to 0.5 gpm option only.




Specifications

PFXE200CP

**Lubec Commercial Sensor
Lavatory Faucet**



Product Specifications

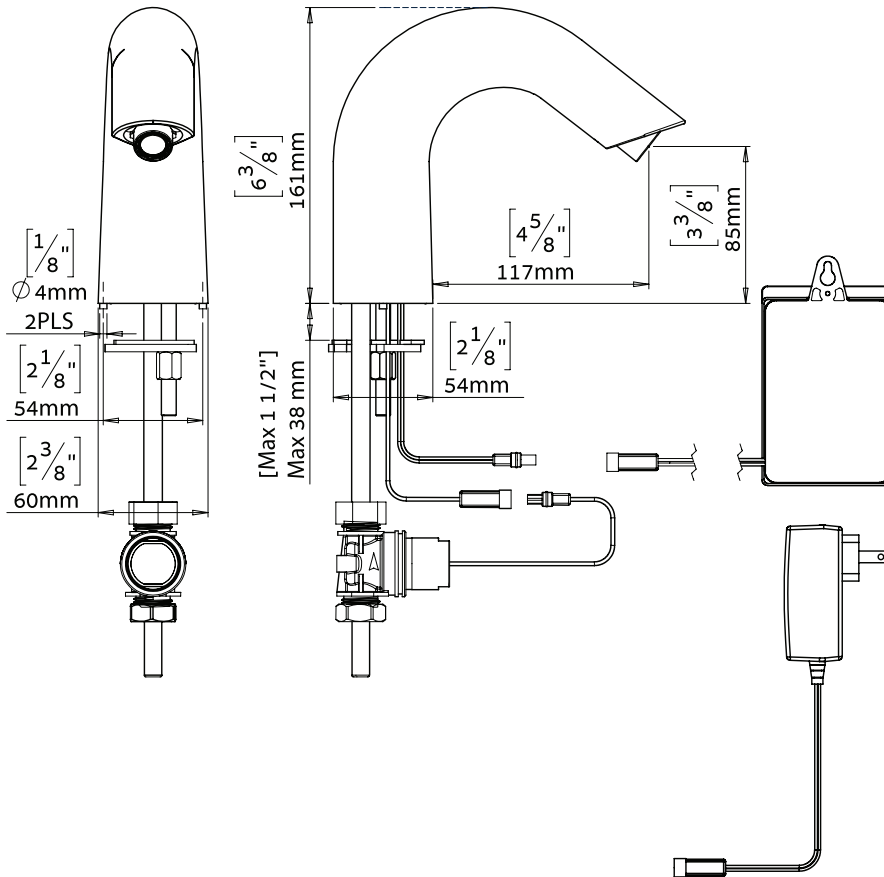

* All measurements are nominal. Please verify before actual installation.

