

## Specifications

PFXE100CP

# Kerna Commercial Sensor Lavatory Faucet



### Product Features

- Touch-free deck-mounted electronic faucet
- Cold or premixed water
- Dual power (110V plug with 9V battery backup or 9V battery only) with battery box and transformer included (batteries not included)
- Chrome-plated body
- Activated by a concealed sensor in the spout
- Filter included
- Low battery indicator
- Adjustable sensor settings: Sensor range, security time, delay in, delay out, on-off, factory reset. Remote control required - sold separately. Factory settings will suffice for most applications and users. In the rare case that custom settings are desired, the optional remote control indicated below is required
- The faucet is automatically activated when users place their hands in the sensor range and shuts off when the user's hands are removed

### Product Specifications

- Vandal-resistant aerator
- Power supply options: 9V battery or 9V transformer
- Operating pressure: 0.5-8.0 bar/7.0-116.0 psi
- Water supply: Cold or premixed water
- Water saving options: 0.5 gpm (default), 0.35 gpm (OBPF508510067)
- Water temperature: 70°C maximum
- Security time: Auto shutoff after 90 seconds, adjustable by remote control
- Sensor: Infrared convergence-type proximity sensor


### Optional Parts

<b>OBPF107270288</b>	Deck plate
<b>OBPF508510067</b>	0.35 gpm aerator
<b>PFXEREMOTE</b>	Remote control



PFXE100CP

FLOW RATE VS PRESSURE

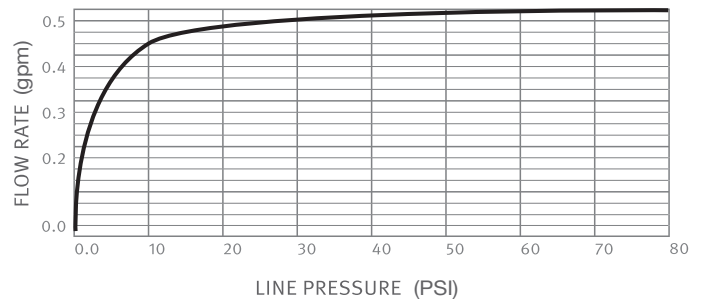

This graph applies to 0.5 gpm option only.

### Warranty and Codes

This product comes complete with installation, operating, care and maintenance instructions. This PROFLO faucet carries a Consumer and Industrial/Commercial 1-year limited warranty. This product meets ANSI: A112.18.1M. \*Compliant with lead content requirements of US Senate Bill S.3874




# Specifications

PFXE100CP

## Kerna Commercial Sensor Lavatory Faucet



### Product Specifications

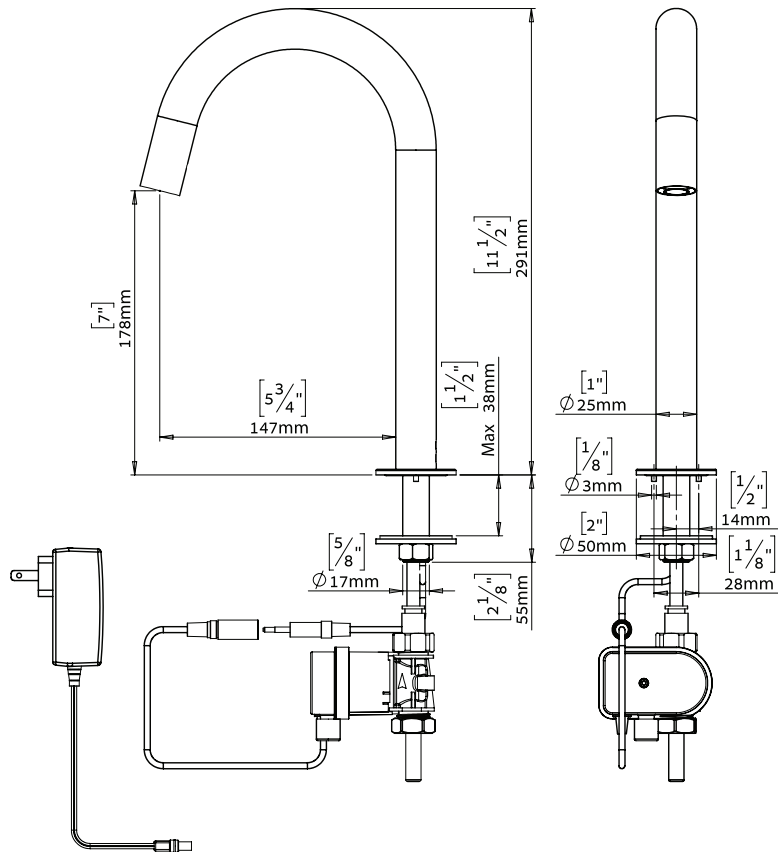

\* All measurements are nominal. Please verify before actual installation.

